

Valves for...

- Heating
 - Underfloor Heating
 - Naturalgas
 - Plumbing
 - Fire Fighting

1


Heating



Thermostatic Radiator Valves	4
Radiator Valves	13
Radiator Check Valves	22
H-Valves	26
Thermostatic Radiator Valve Sets	28
Radiator Valve Sets	31
Unions	33
Automatic Air Purgers	35
Magnetic Filter Set	36
Safety Valves	37

2

Underfloor Heating



Differential Pressure Control Valves	38
Manifolds	40
Room Thermostats & Actuator	46
Main Control Unit	47
Air/Water Discharge Sets	48
2 Way Valves	49
Ball Valves	49

3

Fancoil Valves

Fancoil Valves	50
Thermal Control Valve Motor (Actuator)	51
Fancoil Thermostats	51

4

Naturalgas



Ball Valves	52
Elbows	56
Connection Unions	57
End Caps	58

5

Plumbing



Ball Valves	59
Gate and Stop Valves	64
Filter and Check Valves	65
Floater	67
Water Pressure Reducing Valves	68
Taps	70

6

Fire Fighting




Fire Fighting	74
---------------	----

THERMOSTATIC RADIATOR VALVE, ANGLE

TRV4						
Code	D	H	H1	L	Inbox Qty	
602120755 White	1/2"	105,5	23	51,2	22	
802120116 Black						
802120303 Chrome						


EN 215, TS EN 215 (Up to 30% Energy Saving)

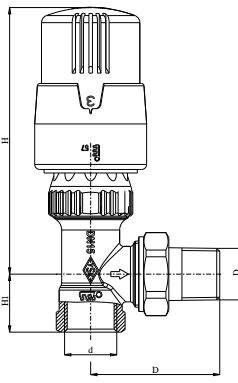

THERMOSTATIC RADIATOR VALVE, ANGLE

TRV4						
Code	D	H	L	L1	Inbox Qty	
602120756 White	1/2"	103	80	49	22	
802120117 Black						
802120304 Chrome						


EN 215, TS EN 215 (Up to 30% Energy Saving)



THERMOSTATIC RADIATOR VALVE, ANGLE

TRV4						
Code	D	d	L	H1	H	Inbox Qty
602120780	1/2"	Ø16	51,2	23	106	22


EN 215, TS EN 215 (Up to 30% Energy Saving)

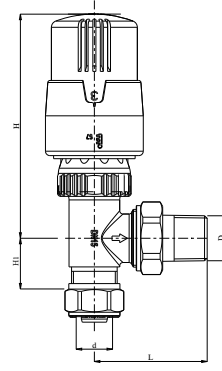

THERMOSTATIC RADIATOR VALVE, STRAIGHT

TRV4						
Code	D	d	H	L	L1	Inbox Qty
602120779	1/2"	Ø16X2	106	84,3	49,3	22


EN 215, TS EN 215 (Up to 30% Energy Saving)

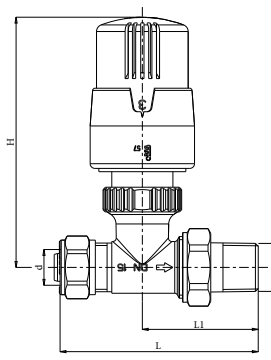

THERMOSTATIC RADIATOR VALVE WITH GASKET, ANGLE

TRV4						
Code	D	L	H1	H	Inbox Qty	
602120938	1/2"	49	23	102	22	


EN 215, TS EN 215 (Up to 30% Energy Saving)

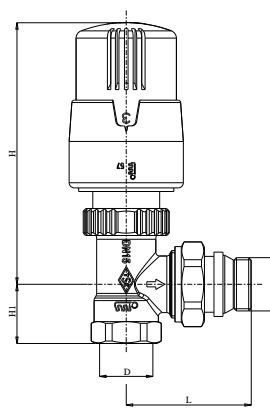

THERMOSTATIC RADIATOR VALVE WITH GASKET, STRAIGHT

TRV4						
Code	D	L	L1	H	Inbox Qty	
802120044	1/2"	78	47	106	22	


EN 215, TS EN 215 (Up to 30% Energy Saving)

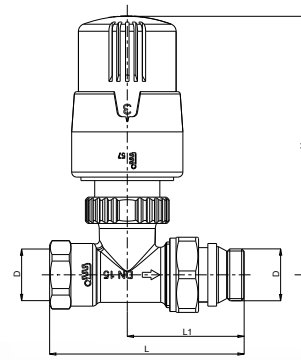

THERMOSTATIC RADIATOR VALVE, HORIZONTAL AXIS

TRV4						
Code	D	d	H	L	L1	Inbox Qty
602120815	1/2"	1/2"	32	49	114	22


EN 215, TS EN 215 (Up to 30% Energy Saving)

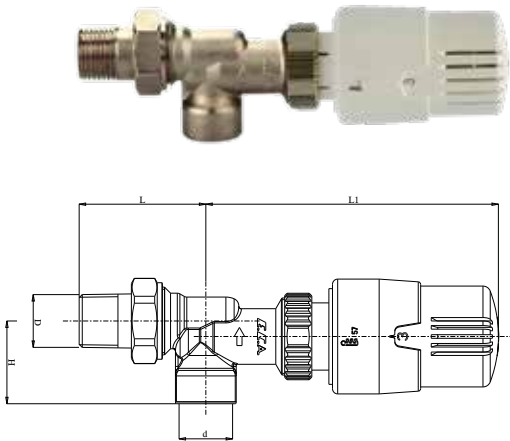

THERMOSTATIC RADIATOR VALVE, HORIZONTAL AXIS

TRV4						
Code	D	d	H	L	L1	Inbox Qty
602120879	1/2"	Ø16	27	49	114	22


EN 215, TS EN 215 (Up to 30% Energy Saving)

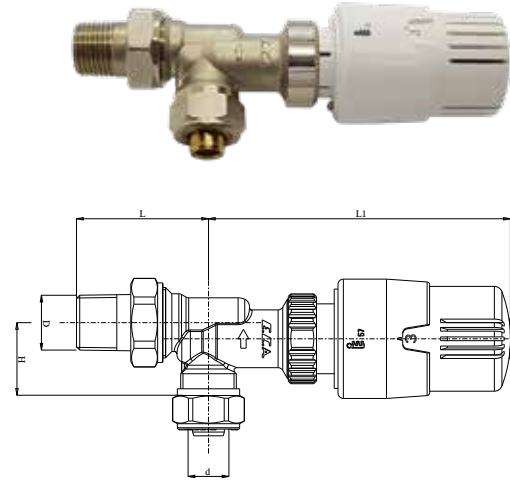

THERMOSTATIC RADIATOR VALVE, HORIZONTAL AXIS

TRV4						
Code	D	d	L	L1	H	Inbox Qty
602120880	1/2"	Ø15	49	113	36,5	22

EN 215, TS EN 215 (Up to 30% Energy Saving)

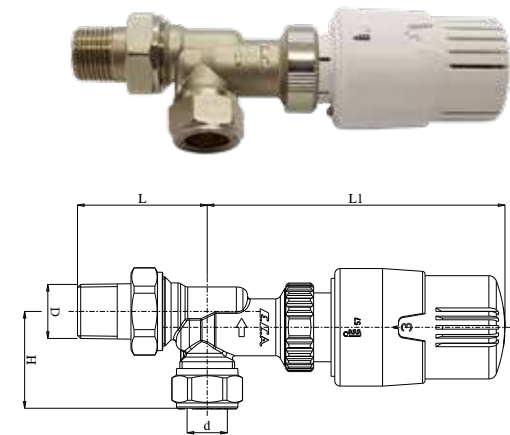


REVERSIBLE TYPE
THERMOSTATIC RADIATOR VALVE, ANGLE

TRV4						
Code	D	d	L	L1	H	Inbox Qty
602120759	1/2"	Ø15	114	21	60,5	22

EN 215, TS EN 215 (Up to 30% Energy Saving)

- Inlet and outlet can be reversed according to the usage

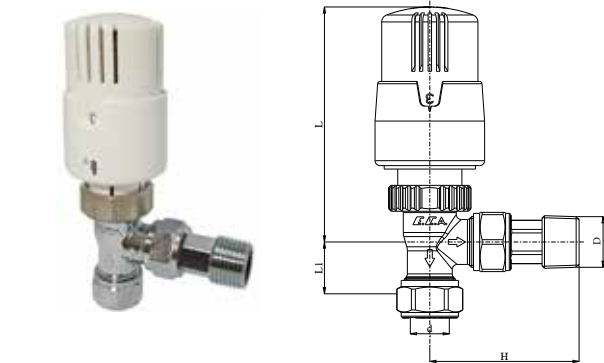


REVERSIBLE TYPE
THERMOSTATIC RADIATOR VALVE, STRAIGHT

TRV4						
Code	D	d	L	H	H1	Inbox Qty
602120760	1/2"	Ø15	108	105	74	22

EN 215, TS EN 215 (Up to 30% Energy Saving)


- Inlet and outlet can be reversed according to the usage

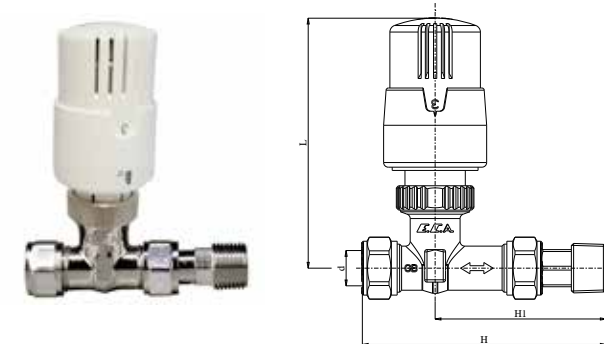

THERMOSTATIC RADIATOR VALVE WITH INTERNAL FLOW CONTROL DEVICE, ANGLE

TRV4					
Code	D	L	B	H	Inbox Qty
802120006	1/2"	51,2	23	108	7


EN 215, TS EN 215 (Up to 30% Energy Saving)

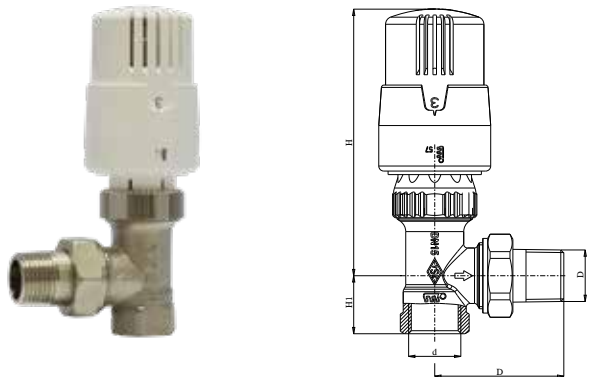

THERMOSTATIC RADIATOR VALVE WITH INTERNAL FLOW CONTROL DEVICE, STRAIGHT

TRV4					
Code	D	L	L1	H	Inbox Qty
802120007	1/2"	79,7	48,7	108	7

EN 215, TS EN 215 (Up to 30% Energy Saving)

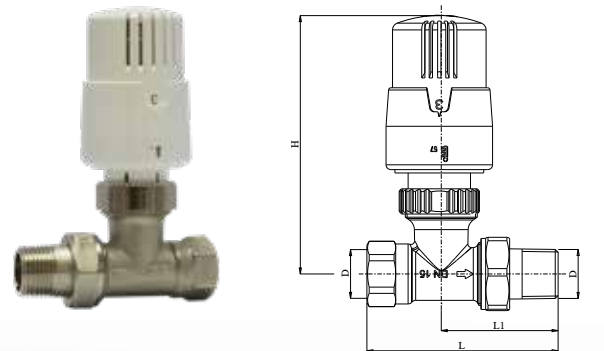


H-TYPE THERMOSTATIC VALVE, ANGLE

TRV4 Head							
Code	Head Color	D	d	H	L	L1	Inbox Qty
602120843	White	1/2"	Ø16x2	35	185	51,35	6
802120011	Chrome						
802120065	Black						

Up to 30% Energy Saving

- Heating Systems, 10 bar, 120°C

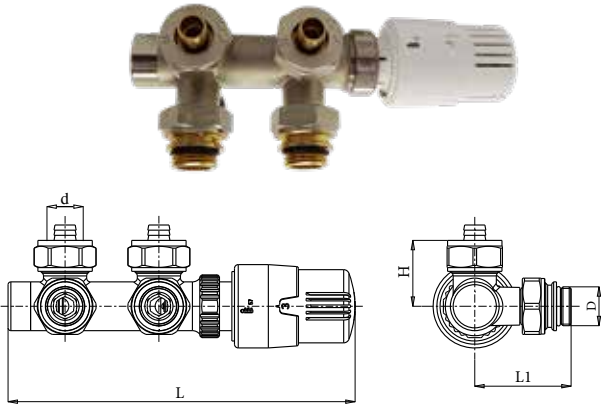


H-TYPE THERMOSTATIC VALVE, STRAIGHT

TRV4 Head							
Code	Head Color	D	d	H	L	L1	Inbox Qty
602120836	White	1/2"	Ø16x2	86,5	185	50	6
802120013	Chrome						
802120064	Black						

Up to 30% Energy Saving

- Heating Systems, 10 bar, 120°C

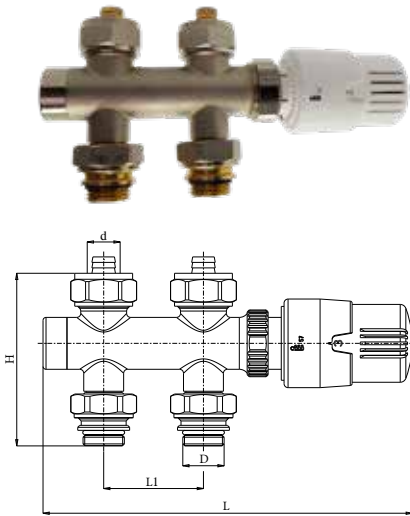

DECORATIVE COVER for H-TRV

Code	Color	L	L1	H	Inbox Qty
610801227	Chrome	120	100	78	25



DECORATIVE COVER for H-TRV

Code	Color	L	L1	H	Inbox Qty
610801226	White	120	100	78	25



DECORATIVE COVER for H-TRV

Code	Color	L	L1	H	Inbox Qty
610801225	Black	120	100	78	25





THERMOSTATIC INSERT VENTIL FOR COMPACT RADIATORS

TRV4 Set											
Code	D	D4	D1	D2	D3	H	H1	H2	H3	Inbox Qty	
602120796	M30x1,5	Ø44,4	Ø15,6	Ø3,9	1/2"	63,8	44	15,3	82,7	21	

EN 215, TS EN 215 (Up to 30% Energy Saving)

- External Gasket L=44 mm
- Internal Flow Control

It is recommended to check conforming with the inlet design of radiator.

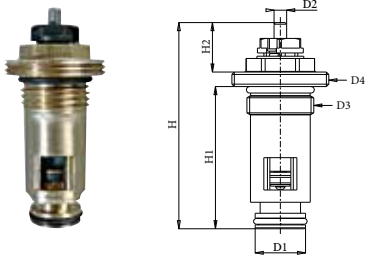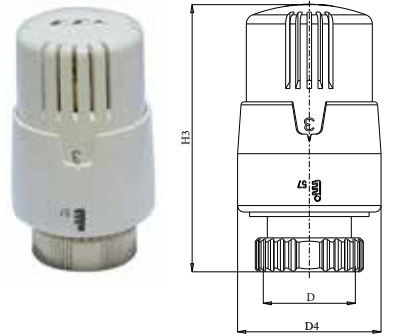



THERMOSTATIC INSERT VENTIL FOR COMPACT RADIATORS

TRV4 Set												
Code	D	H	H1	H2	H3	D4	D1	D2	D3	SW	Inbox Qty	
602120813	M30x1,5	61,1	41,3	15,3	82,7	Ø44,4	Ø17	Ø3,9	1/2"	SW19	21	

EN 215, TS EN 215 (Up to 30% Energy Saving)

- External Gasket L=41,3 mm
- Internal Flow Control

It is recommended to check conforming with the inlet design of radiator.

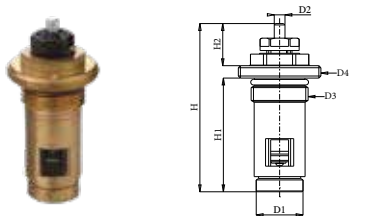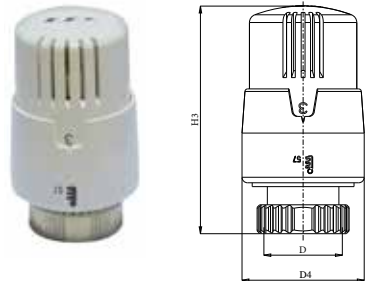



THERMOSTATIC INSERT VENTIL FOR COMPACT RADIATORS

TRV4 Set												
Code	D	H	H1	H2	H3	D4	D1	D2	D3	Inbox Qty		
602120814	M30x1,5	56,5	35,1	15,3	82,7	Ø44,4	Ø18,4	Ø3,9	1/2"	21		

EN 215, TS EN 215 (Up to 30% Energy Saving)

- External Gasket L=35,1 mm
- Internal Flow Control


It is recommended to check conforming with the inlet design of radiator.

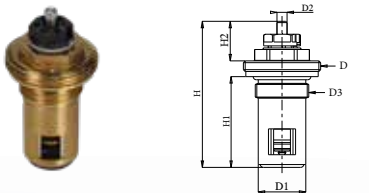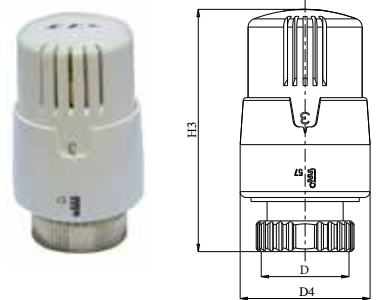

INSERT VENTIL FOR COMPACT RADIATORS

Code	D3	H	H1	L2	D1	D2	D4	Inbox Qty
602120312	G 1/2"	63,8	44	15,3	Ø15,6	Ø3,9	M30x1,5	90


- EN 215, TS EN 215
- External Gasket L=44 mm
 - Internal Flow Control
- * It is recommended to check conforming with the inlet design of radiator.

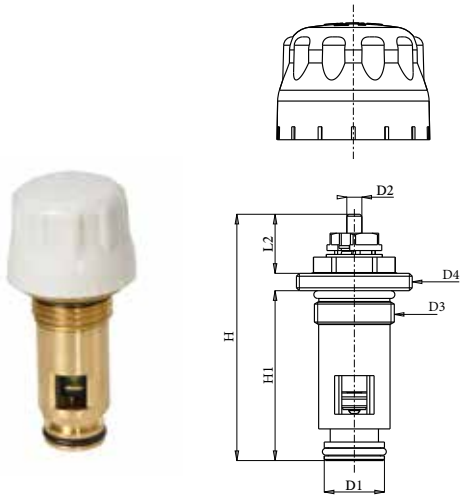

INSERT VENTIL FOR COMPACT RADIATORS

Code	T	H	H1	H2	D1	D2	T1	Inbox Qty
602120624	G 1/2"	61,1	41,3	15,5	Ø17	Ø3,9	M30x1,5	90


- EN 215, TS EN 215
- External Gasket L=41,3 mm
 - Internal Flow Control
- * It is recommended to check conforming with the inlet design of radiator.

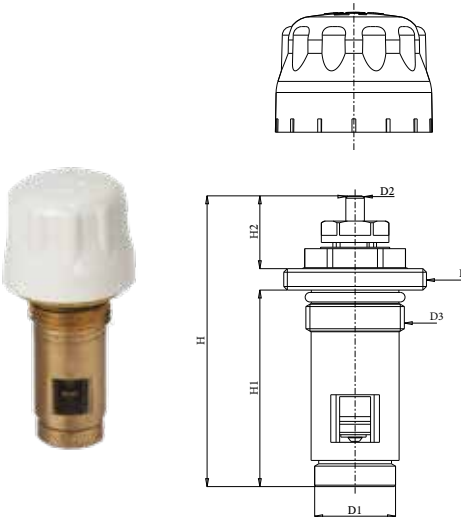

INSERT VENTIL FOR COMPACT RADIATORS

Code	D3	H	H1	H2	D1	D2	D4	Inbox Qty
602120477	G 1/2"	56,5	35,1	15,3	Ø16,9	Ø3,9	M30x1,5	90


- EN 215, TS EN 215
- External Gasket L=35,1 mm
 - Internal Flow Control
- * It is recommended to check conforming with the inlet design of radiator.

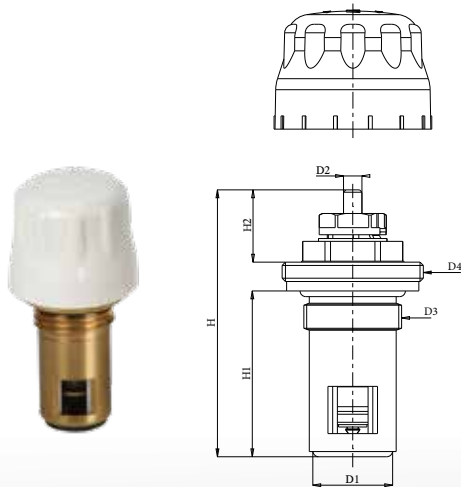

INSERT VENTIL FOR CUSTOMIZED RADIATORS

Code	D	H	H1	H2	D4	D1	D2	D3	Inbox Qty
602120435	M30x1,5	66,7	33,4	15,3	Ø25	Ø19,2	Ø3,9	M22x1,5	90


- External Gasket L=33 mm
 - Internal Flow Control
 - For aluminum radiator models suitable.
- It is recommended to check conforming with the inlet design of radiator.

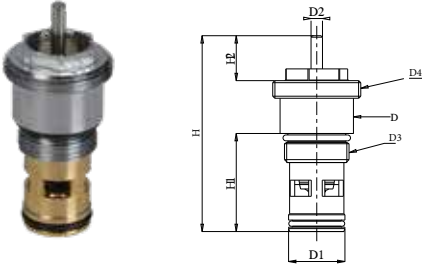

INSERT VENTIL FOR CUSTOMIZED RADIATORS

Code	D	H	H1	H2	D4	D1	D2	D3	Inbox Qty
602120736	M30x1,5	88,4	55,1	15,3	Ø25	Ø19,2	Ø3,9	M22x1,5	90


- External Gasket L=55 mm
 - Internal Flow Control
 - For aluminum radiator models suitable.
- It is recommended to check conforming with the inlet design of radiator.

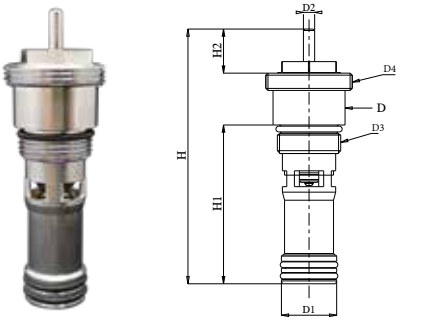

INSERT VENTIL FOR CUSTOMIZED RADIATORS

Code	D	H	H1	H2	D4	D1	D2	D3	Inbox Qty
602120478	M30x1,5	93,4	60,1	15,3	Ø25	Ø19,2	Ø3,9	M22x1,5	90


- External Gasket L=60 mm
 - Internal Flow Control
 - For aluminum radiator models suitable.
- It is recommended to check conforming with the inlet design of radiator.

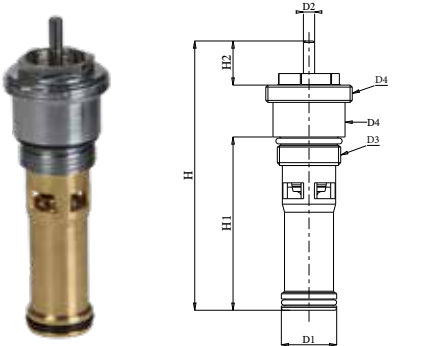

INSERT VENTIL FOR CUSTOMIZED RADIATORS

Code	L	L1	L2	D	D1	D2	D3	D4	Inbox Qty
602120737	120,5	87,2	15,3	Ø25	Ø19,2	Ø3,9	M22x1,5	M30x1,5	90


- External Gasket L=87 mm
 - Internal Flow Control
 - For aluminum radiator models suitable.
- It is recommended to check conforming with the inlet design of radiator.

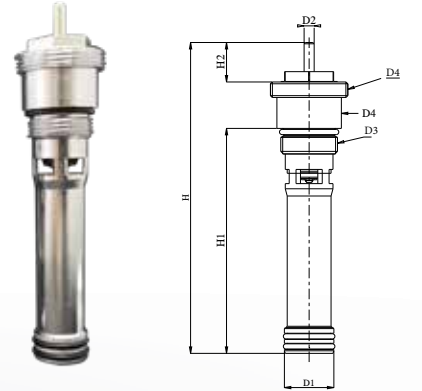

THERMOSTATIC HEAD

TRV4				
Code	D	D1	H	Inbox Qty
602399803	M30x1,5	Ø44,4	82,7	24


EN 215, TS EN 215 (Up to 30% Energy Saving)

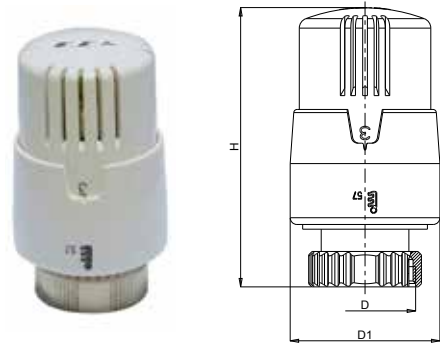

THERMOSTATIC HEAD

TRV4 - Black				
Code	D	D1	H	Inbox Qty
602499978	M30x1,5	Ø44,4	82,7	24


EN 215, TS EN 215 (Up to 30% Energy Saving)

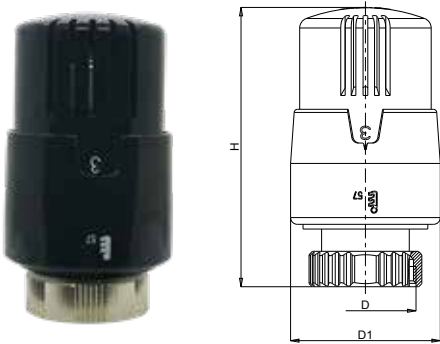

THERMOSTATIC HEAD

TRV4 - Chrome				
Code	D	D1	H	Inbox Qty
802199161	M30x1,5	Ø44,4	82,7	24


EN 215, TS EN 215 (Up to 30% Energy Saving)

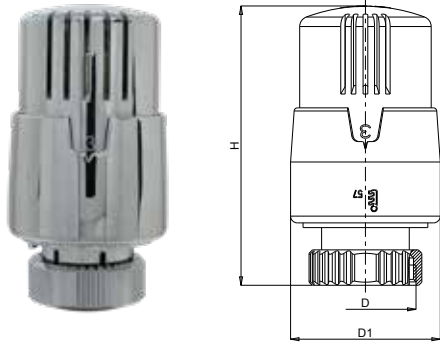

RADIATOR VALVE, ANGLE

RV2					
Code	D	H	H1	L	Inbox Qty
102120332	1/2"	74,5	23	51,7	50
102120333	3/4"	78	26	61,5	35


- TS 579
- Heating Systems, 10 bar, 120°C

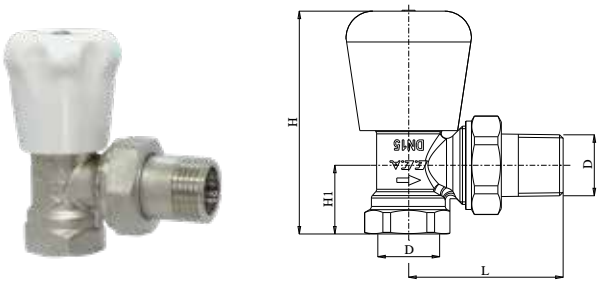

RADIATOR VALVE, STRAIGHT

RV2					
Code	D	H	H1	L	Inbox Qty
102120322	1/2"	60,6	80,6	50,6	50
102120323	3/4"	61	96	60,4	35


- TS 579
- Heating Systems, 10 bar, 120°C

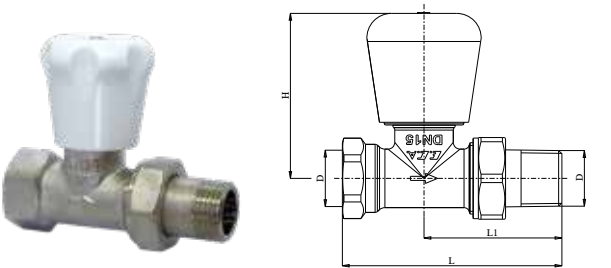

RADIATOR VALVE, ANGLE

RV2						
Code	D	H	H1	L	d	Inbox Qty
602120338	1/2"	82,5	32,2	52,1	Ø16	50


- Heating Systems, 10 bar, 120°C

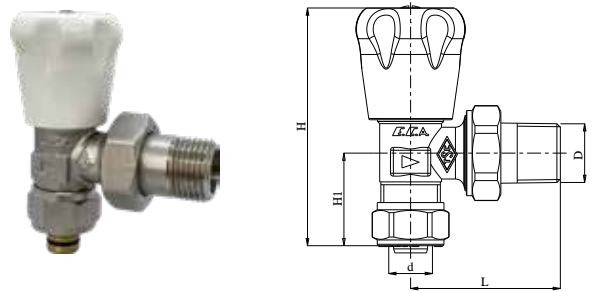

RADIATOR VALVE WITH GASKET, ANGLE

RV2						
Code	D	H	H1	L	d	Inbox Qty
602120974	1/2"	82,5	32,2	48,2	Ø16	50


- Heating Systems, 10 bar, 120°C

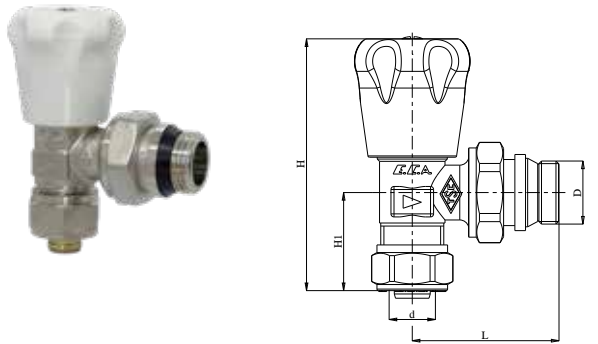

RADIATOR VALVE WITH GASKET, ANGLE

RV2						
Code	D	L	H1	H	Inbox Qty	
602120552	1/2"	53,2	23	50,5	50	


- TS 579
- Heating Systems, 10 bar, 120°C

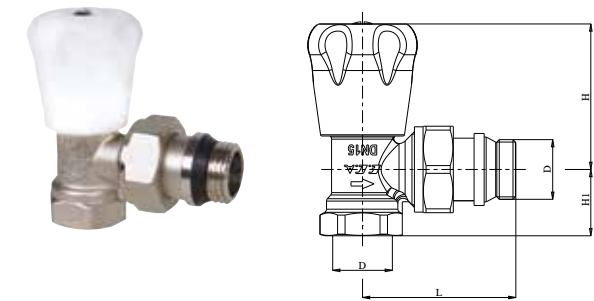

RADIATOR VALVE WITH GASKET, STRAIGHT

RV2						
Code	D	H	L	L1	Inbox Qty	
602120553	1/2"	59,6	82,2	52,2	50	


- TS 579
- Heating Systems, 10 bar, 120°C

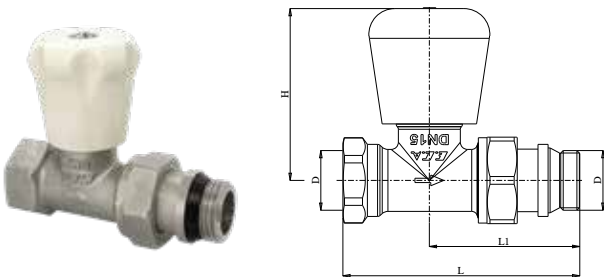

RADIATOR VALVE, ANGLE

RV3						
Code	D	H	H1	L	Inbox Qty	
602120641	1/2"	75,5	23	51,7	50	


- TS 579
- Heating Systems, 10 bar, 120°C

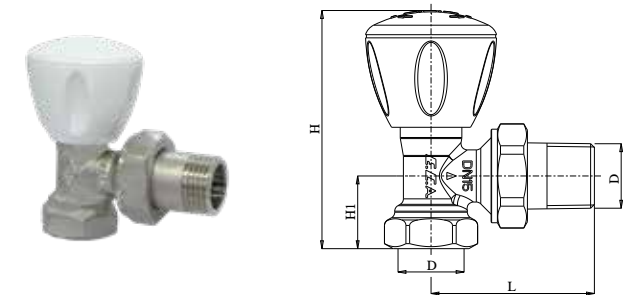

RADIATOR VALVE, STRAIGHT

RV3						
Code	D	H	L	L1	Inbox Qty	
602120725	1/2"	60,1	80,6	50,6	50	


- TS 579
- Heating Systems, 10 bar, 120°C

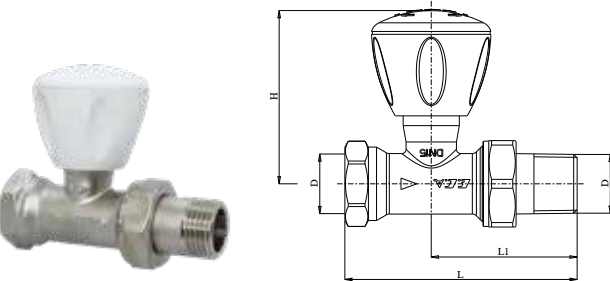

RADIATOR VALVE, ANGLE

RV3						
Code	D	H	H1	L	d	Inbox Qty
602120721	1/2"	84,5	32,1	50,7	Ø16x2	50


- Heating Systems, 10 bar, 120°C

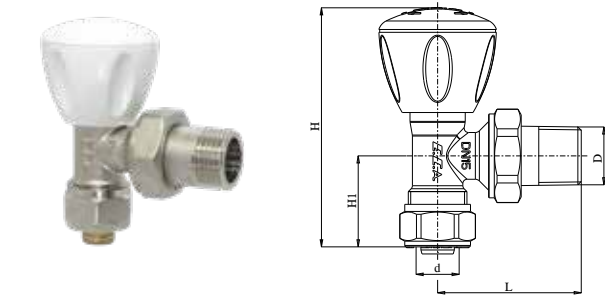

RADIATOR VALVE, STRAIGHT

RV3						
Code	D	H	L	L1	Inbox Qty	
602120722	1/2"	60,1	51,7	51,7	50	


- Heating Systems, 10 bar, 120°C

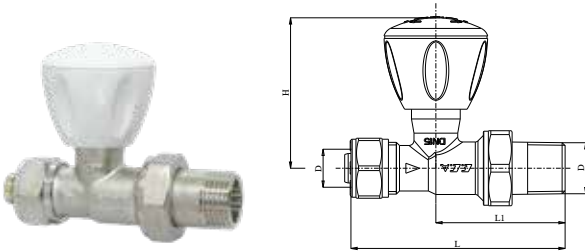

RADIATOR VALVE WITH GASKET, ANGLE

RV3						
Code	D	H	H1	L	Inbox Qty	
602120723	1/2"	75,5	23	53,7	50	


- TS 579
- Heating Systems, 10 bar, 120°C

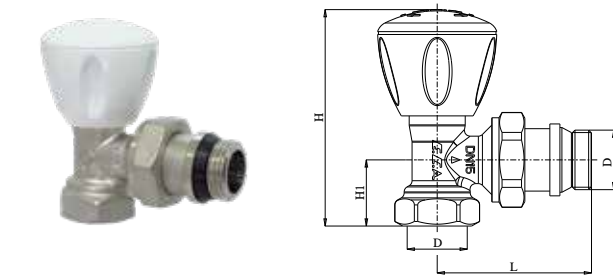

RADIATOR VALVE WITH GASKET, STRAIGHT

RV3						
Code	D	H	L	L1	Inbox Qty	
602120724	1/2"	60,1	82,7	52,7	50	

- TS 579
- Heating Systems, 10 bar, 120°C

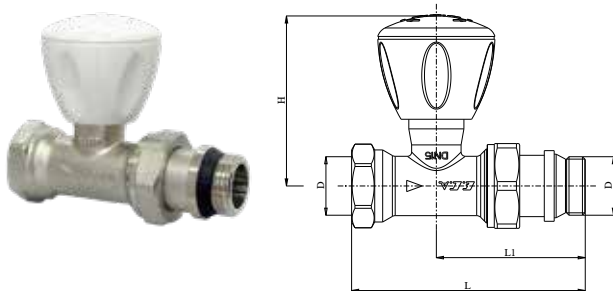


RADIATOR VALVE, ANGLE

Type 2

Code	D	L	H1	H	Inbox Qty
802120113	1/2"	45,7	19	52	50

• Heating Systems, 10 bar, 120°C

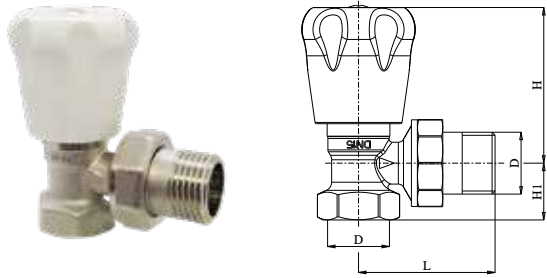


RADIATOR VALVE, STRAIGHT

Type 2

Code	D	H	L1	L	Inbox Qty
802120230	1/2"	58,4	45	69	50

• Heating Systems, 10 bar, 120°C

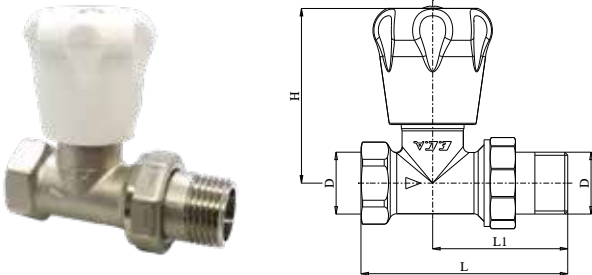


RADIATOR VALVE, ANGLE

Type 2

Code	D	H	H1	L	Inbox Qty
802120228	1/2"	71	19	46,2	50

• Heating Systems, 10 bar, 120°C

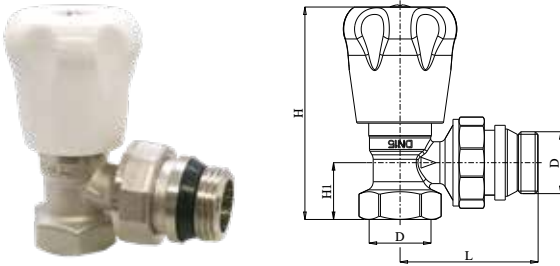


RADIATOR VALVE, STRAIGHT

Type 2

Code	D	H	L1	L	Inbox Qty
802120229	1/2"	58,5	45,7	69,7	50

• Heating Systems, 10 bar, 120°C

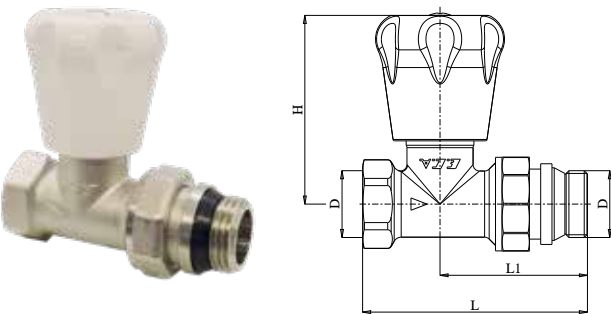


RADIATOR VALVE, ANGLE

RVK

Code	D	L	H1	H	Inbox Qty
602120635	1/2"	46	19	52	50

• Heating Systems, 10 bar, 120°C

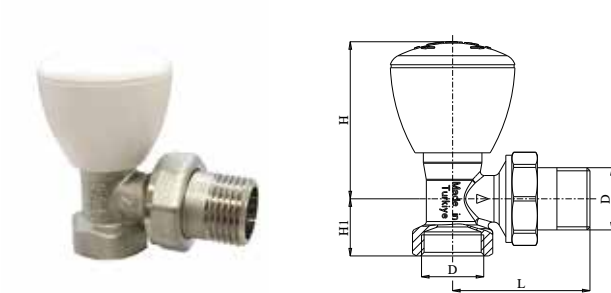


RADIATOR VALVE, STRAIGHT

RVK

Code	D	L	L1	H	Inbox Qty
602120706	1/2"	75	48	60	50

• Heating Systems, 10 bar, 120°C

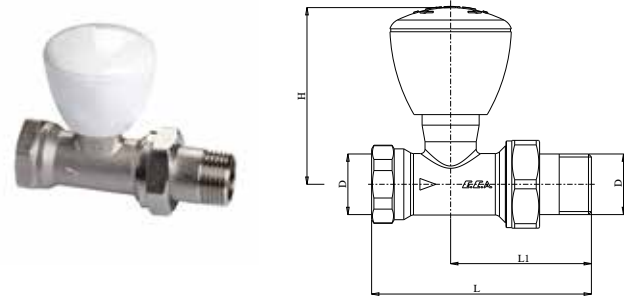


RADIATOR VALVE, ANGLE

RVK

Code	D	d	L	H1	H	Inbox Qty
602120732	1/2"	Ø16	45,7	19	52	50

• Heating Systems, 10 bar, 120°C

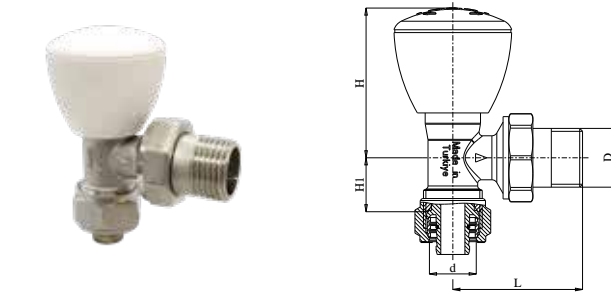


RADIATOR VALVE, STRAIGHT

RVK

Code	D	D1	L	L1	H	Inbox Qty
602120733	1/2"	Ø16	88	48,5	60	50


• Heating Systems, 10 bar, 120°C

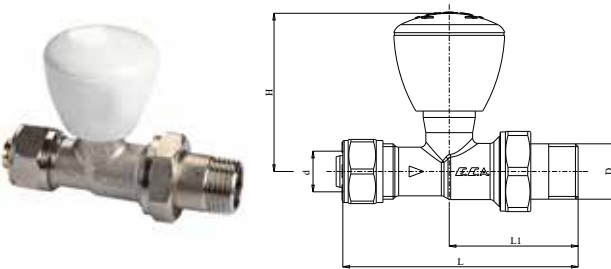

RADIATOR VALVE WITH GASKET, ANGLE

RVK					
Code	D1	L	H1	H	Inbox Qty
602120636	1/2"	46	19	52	50


• Heating Systems, 10 bar, 120°C

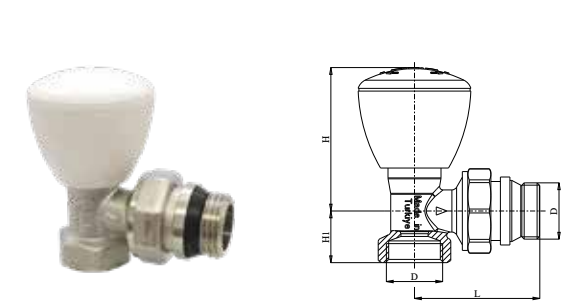

RADIATOR VALVE WITH GASKET, STRAIGHT

RVK					
Code	D	L	L1	H	Inbox Qty
602120637	1/2"	75,7	48,7	60,4	50


• Heating Systems, 10 bar, 120°C

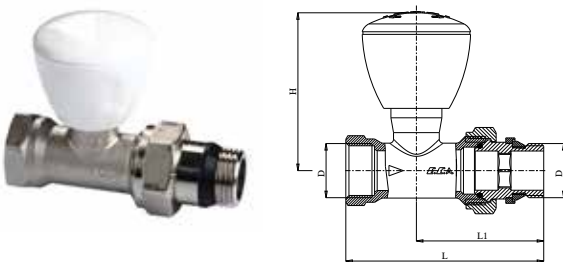

RADIATOR VALVE WITH GASKET, ANGLE

RVK						
Code	D	d	L	H1	H	Inbox Qty
602120705	1/2"	Ø16	48,7	35,5	52	50


• Heating Systems, 10 bar, 120°C

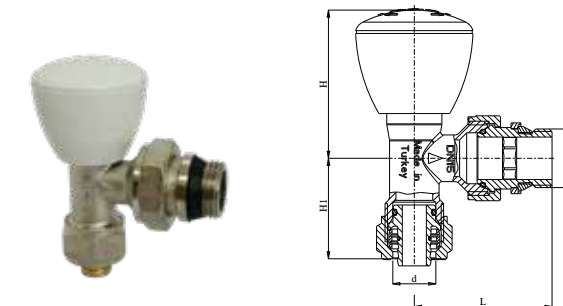

RADIATOR VALVE WITH GASKET, STRAIGHT

RVK						
Code	D	d	L	L1	H	Inbox Qty
602120707	1/2"	Ø16	86,5	48,7	59	50


• Heating Systems, 10 bar, 120°C

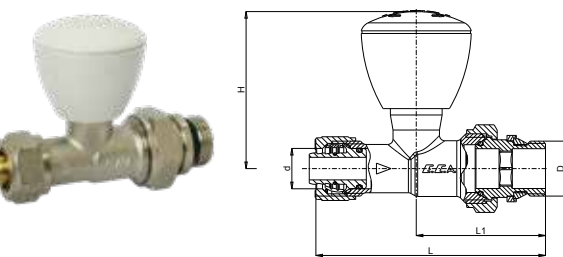

RADIATOR VALVE, CHROME PLATED, ANGLE

RVK					
Code	D	L	H1	H	Inbox Qty
602120888	1/2"	48	23	52	50


• Heating Systems, 10 bar, 120°C

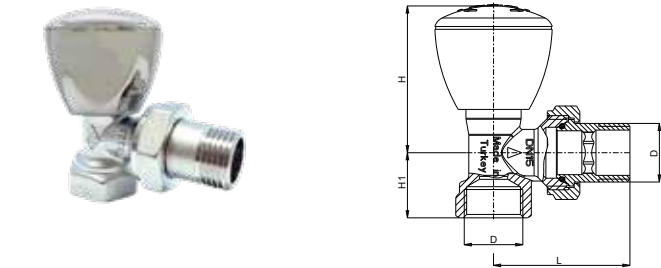

RADIATOR VALVE, CHROME PLATED, STRAIGHT

RVK					
Code	D	L	L1	H	Inbox Qty
602120886	1/2"	75	48	60,4	50


• Heating Systems, 10 bar, 120°C

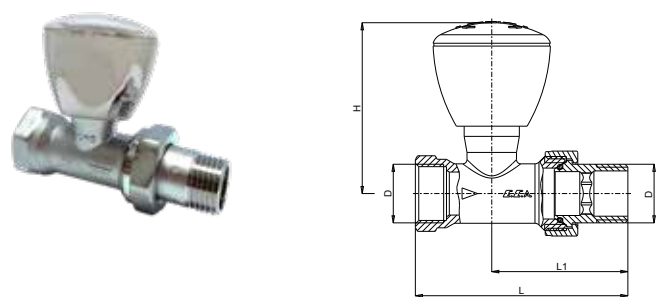

RADIATOR VALVE, CHROME PLATED, ANGLE

RVK						
Code	D	d	L	H1	H	Inbox Qty
602120889	1/2"	Ø16	48,3	34	52,4	50


• Heating Systems, 10 bar, 120°C

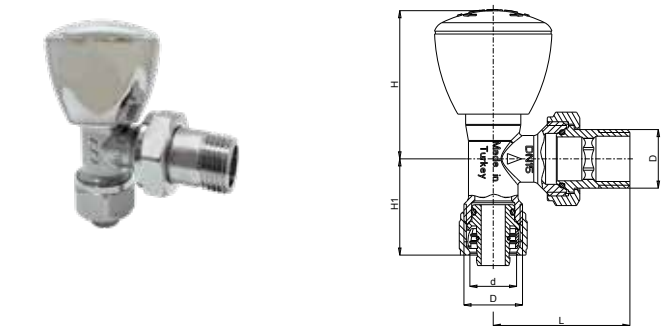

RADIATOR VALVE, CHROME PLATED, STRAIGHT

RVK						
Code	D	d	L	L1	H	Inbox Qty
602120887	1/2"	Ø16	86,7	48,2	59	50

• Heating Systems, 10 bar, 120°C

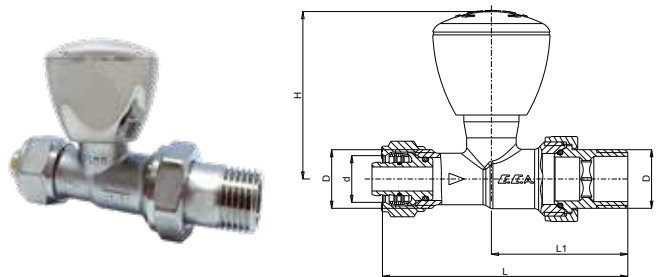


RADIATOR VALVE, CHROME PLATED, ANGLE

RV3

Code	D	H	H1	L	Inbox Qty
602120749	1/2"	74,5	23	51,7	50

- TS 579
- Heating Systems, 10 bar, 120°C




RADIATOR VALVE, CHROME PLATED, STRAIGHT

RV3

Code	D	L	H	H1	Inbox Qty
602120750	1/2"	60,1	80,6	50,6	50

- TS 579
- Heating Systems, 10 bar, 120°C




RADIATOR VALVE, CHROME PLATED, STRAIGHT

RV3 Pex

Code	D	d	H	L	L1	Inbox Qty
602120752	1/2"	Ø16	60,1	84,4	51,7	50

- Heating Systems, 10 bar, 120°C




RADIATOR VALVE, CHROME PLATED, ANGLE

RV3 Pex

Code	D	d	H	H1	L	Inbox Qty
602120751	1/2"	Ø16	83,5	31,3	50,7	50


- Heating Systems, 10 bar, 120°C



RADIATOR VALVE, CHROME PLATED, ANGLE

Code	D	H	H1	L	Inbox Qty
602120280	1/2"	62,5	23	51,2	50


- TS 579
- Heating Systems, 10 bar, 120°C



RADIATOR VALVE, CHROME PLATED, STRAIGHT

Code	D	H	L	L1	Inbox Qty
602120281	1/2"	47,1	80,5	51,4	50


- TS 579
- Heating Systems, 10 bar, 120°C



RADIATOR VALVE, CHROME PLATED, ANGLE

Code	D	H	L1	L	Inbox Qty
602120959	1/2"	62,5	23	53,7	50


- TS 579
- Heating Systems, 10 bar, 120°C



RADIATOR VALVE, CHROME PLATED, STRAIGHT

Code	D	H	L1	L	Inbox Qty
602120960	1/2"	45	53,6	82,7	50


- TS 579
- Heating Systems, 10 bar, 120°C



RADIATOR VALVE, CHROME PLATED, ANGLE

Code	D	d	H	H1	L	Inbox Qty
802120031	1/2"	Ø16	39,5	35,2	50,7	50

- TS 579
- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE, ANGLE

GVK, Lockshield Valve

Code	D	L	H	H1	Inbox Qty
602120691	1/2"	48	23	19,5	40

- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE, STRAIGHT

GVK, Lockshield Valve

Code	D	L	L1	H	Inbox Qty
602120697	1/2"	75	48	27	40

- Heating Systems, 10 bar, 120°C

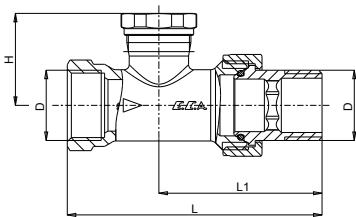


RADIATOR CHECK VALVE, ANGLE

GVK, Lockshield Valve

Code	D	d	L	H	H1	Inbox Qty
602120734	1/2"	Ø16	50,7	34	16,4	40

- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE, STRAIGHT

GVK, Lockshield Valve

Code	D	d	L	H	H1	Inbox Qty
602120735	1/2"	Ø16	71,8	40,6	25	40

- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE WITH GASKET, ANGLE

GVK, Lockshield Valve

Code	D	L	H1	H	Inbox Qty
602120698	1/2"	48,7	23	19.5	40

- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE WITH GASKET, STRAIGHT

GVK, Lockshield Valve

Code	D	L1	L	H	Inbox Qty
602120699	1/2"	27	75,6	27	40

- Heating Systems, 10 bar, 120°C

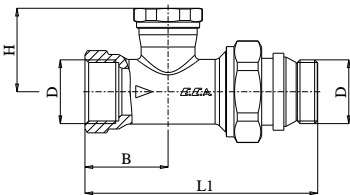


RADIATOR CHECK VALVE WITH GASKET, ANGLE

GVK, Lockshield Valve

Code	D	d	L	H	H1	Inbox Qty
602120700	1/2"	Ø16	48,2	35,5	19,5	30

- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE WITH GASKET, STRAIGHT

GVK, Lockshield Valve

Code	D	d	L	H1	H	Inbox Qty
602120701	1/2"	Ø16	72,2	41,2	25	30

- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE, ANGLE

GV3, Lockshield Valve

Code	D	L	L1	H1	H	Inbox Qty
602120726	1/2"	56	28,5	24,7	42	40

- TS 579
- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE, STRAIGHT

GV3, Lockshield Valve

Code	D	L	H	L2	L3	Inbox Qty
602120727	1/2"	78,2	25	26	49,5	30

- TS 579
- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE, ANGLE

GV3, Lockshield Valve

Code	D	d	L	H	L1	H1	Inbox Qty
602120730	1/2"	Ø16	54,2	50	28,5	33	40

- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE, STRAIGHT

GV3, Lockshield Valve

Code	D	d	H	L	L1	Inbox Qty
602120731	1/2"	Ø16	25	75,3	44,1	7

- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE WITH GASKET, ANGLE

GV3, Lockshield Valve

Code	D	L	H	H1	Inbox Qty
602120728	1/2"	56	42	25,8	40

- TS 579
- Heating Systems, 10 bar, 120°C




RADIATOR CHECK VALVE WITH GASKET, STRAIGHT

GV3, Lockshield Valve

Code	D	L	L1	H	Inbox Qty
602120729	1/2"	77,2	51,2	25	30

- TS 579
- Heating Systems, 10 bar, 120°C

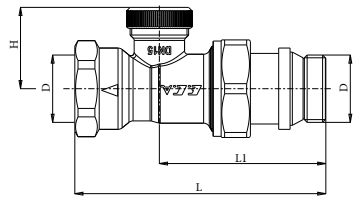


H-VALVE, BALL TYPE, ANGLE

NEW

Code	D	d	H	L	L1	Inbox Qty
802120274	G 1/2"	Ø16	39,6	50	36,6	21

- Screwdriver-controlled valve
- Heating systems, 10 bar, 120 °C

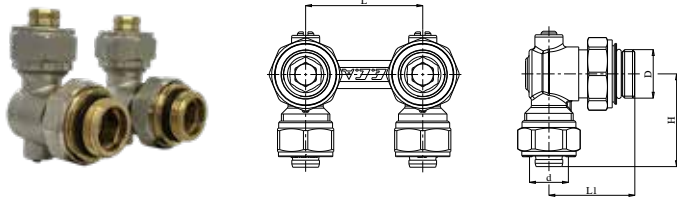


H-VALVE, BALL TYPE, STRAIGHT

NEW

Code	D1	D2	d	L	L2	H	L1	Inbox Qty
602120285	G 3/4"	G 1/2"	Ø16	50	54	18,2	15	21

- Screwdriver-controlled valve
- Heating systems, 10 bar, 120 °C

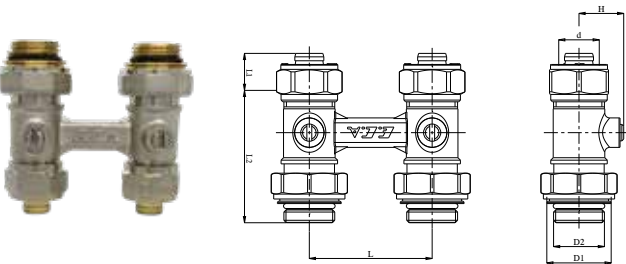


H-VALVE, BALL TYPE, ANGLE

NEW

Code	D	d	H	L	L1	Inbox Qty
802120291	G 1/2"	G 1/2"	24,5	50	36,5	21

- Screwdriver-controlled valve
- Heating systems, 10 bar, 120 °C

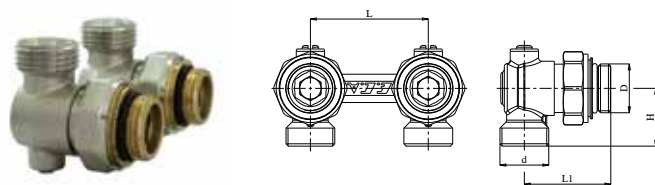


H-VALVE, BALL TYPE, STRAIGHT

NEW

Code	D1	D2	d	L	B	H	A	Inbox Qty
802120292	G 3/4"	G 1/2"	G 1/2"	50	54	18,2	17,2	21


- Screwdriver-controlled valve
- Heating systems, 10 bar, 120 °C

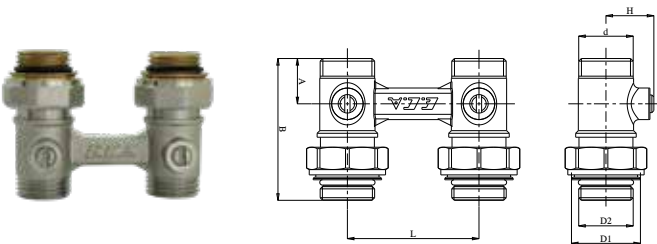

H-VALVE, STOP TYPE, ANGLE

Code	D	d	H	L	L1	Inbox Qty
602120349	1/2"	Ø16,5	43,5	50	50,5	21


- Adjustable with Allen Key
- Protective cover for flap
- Heating Systems, 10 bar, 120°C

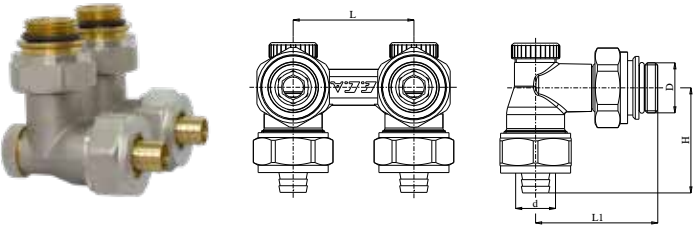

H-VALVE, STOP TYPE, STRAIGHT

Code	D	d	H	L	Inbox Qty
602120348	1/2"	Ø16,5	92	50	21


- Adjustable with Allen Key
- Protective cover for flap
- Heating Systems, 10 bar, 120°C

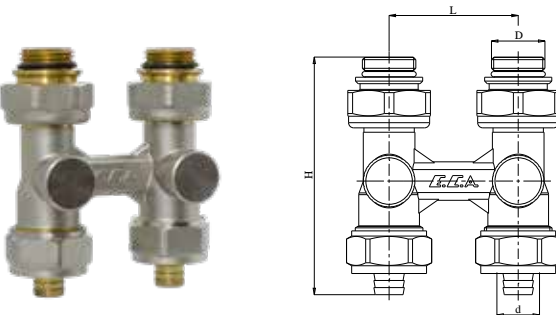

H-VALVE, STOP TYPE, ANGLE

Code	D	D1	L	H	L1	Inbox Qty
602120292	3/4"	1/2"	50	50,5	26	21


- Adjustable with Allen Key
- Protective cover for flap
- Heating Systems, 10 bar, 120°C

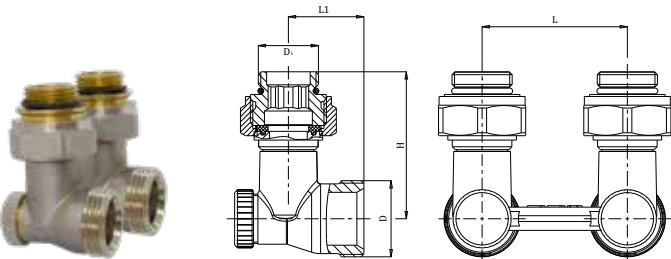

H-VALVE, STOP TYPE, STRAIGHT

Code	D	D1	L	H	Inbox Qty
602120291	3/4"	1/2"	50	74,5	21


- Adjustable with Allen Key
- Protective cover for flap
- Heating Systems, 10 bar, 120°C

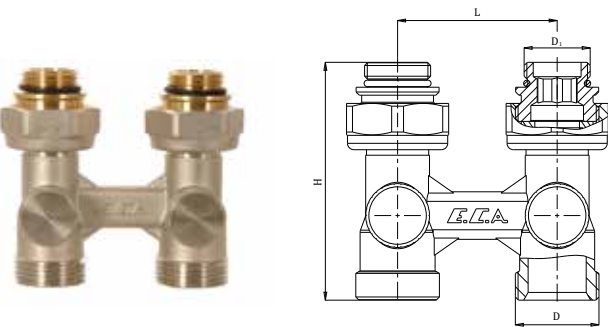

THERMOSTATIC RADIATOR VALVE SET, ANGLE

TRV4, GVK											
Code	D	L	D1	D2	D3	D4	L1	L2	L3	L4	Inbox Qty
602120817	1/2"	83	1/2"	1/2"	M30x1,5	44,5	48	23	51	42,5	18


EN 215, TS EN 215 (Up to 30% Energy Saving)

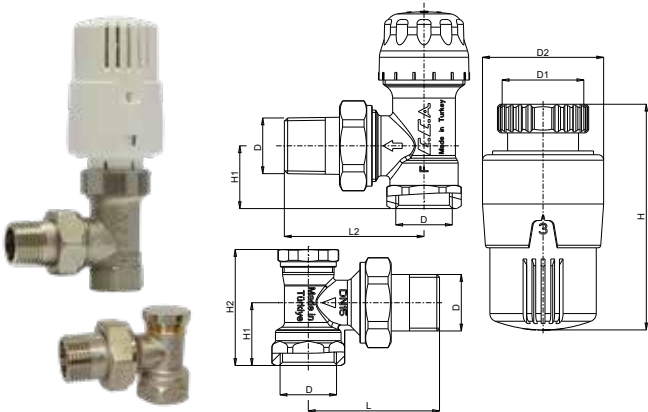

THERMOSTATIC RADIATOR VALVE SET, ANGLE

TRV4, GV3									
Code	D	H	D3	L	H1	H2	H3	Inbox Qty	
602120787	1/2"	83	M30x1,5	56	23	25	42	18	


EN 215, TS EN 215 (Up to 30% Energy Saving)

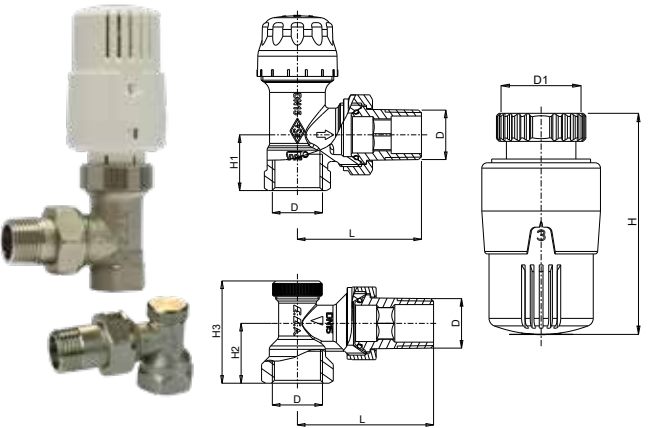

THERMOSTATIC RADIATOR VALVE SET, STRAIGHT

TRV4, GVK										
Code	D	H	D3	D2	L1	L2	H1	L3	Inbox Qty	
602120788	1/2"	83	M30x1,5	44,5	79	26	25	49	18	


EN 215, TS EN 215 (Up to 30% Energy Saving)

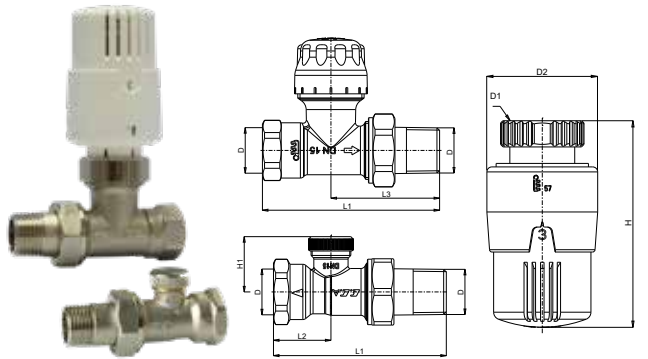

THERMOSTATIC RADIATOR VALVE SET, ANGLE

TRV4, GVK											
Code	L	D	D1	D2	L	H1	H2	H4	d	Inbox Qty	
602120785	83	1/2"	M30x1,5	44,5	51	37	53	38	Ø16	18	


EN 215, TS EN 215 (Up to 30% Energy Saving)

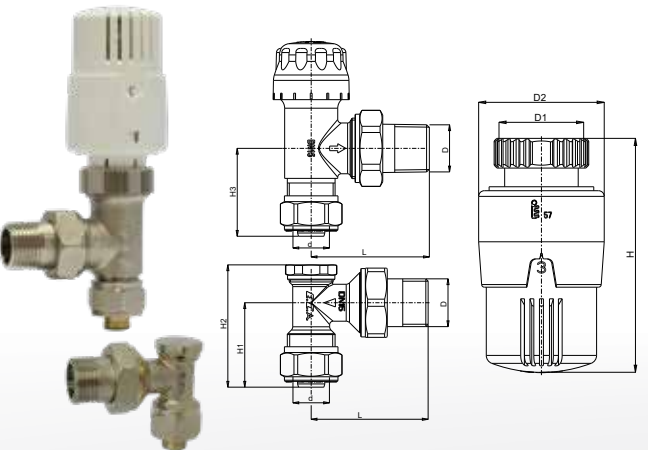

THERMOSTATIC RADIATOR VALVE SET, ANGLE

TRV4, GV3													
Code	H	D	D1	d	D2	H1	H2	H3	H4	L	L1	Inbox Qty	
602120789	83	1/2"	45	Ø16	M30x1,5	46	16,5	35,5	33,5	51,5	54,5	18	


EN 215, TS EN 215 (Up to 30% Energy Saving)

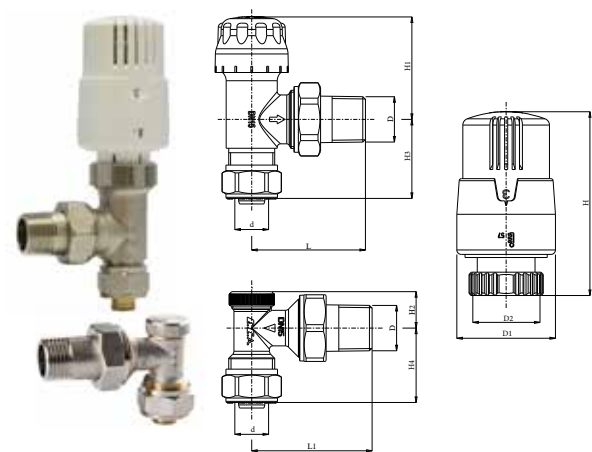

THERMOSTATIC RADIATOR VALVE SET, STRAIGHT

TRV4, GV3													
Code	H	D	D1	d	D2	H1	H2	H3	H4	L	L1	Inbox Qty	
602120790	83	1/2"	45	Ø16	M30x1,5	48	25	49,5	44,5	84,5	75,5	18	


EN 215, TS EN 215 (Up to 30% Energy Saving)

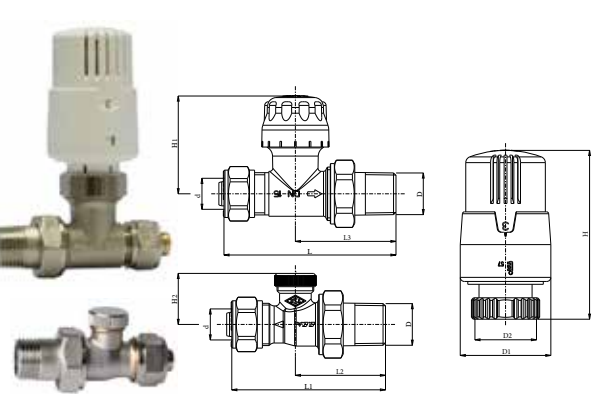

THERMOSTATIC RADIATOR VALVE SET WITH GASKET, ANGLE

TRV4, GV3											
Code	F	C	M	D	H	H1	B	B1	L	L1	Inbox Qty
802120009	83	M30X1,5	45	1/2"	49	16,5	23	26	49	56,5	18


EN 215, TS EN 215 (Up to 30% Energy Saving)

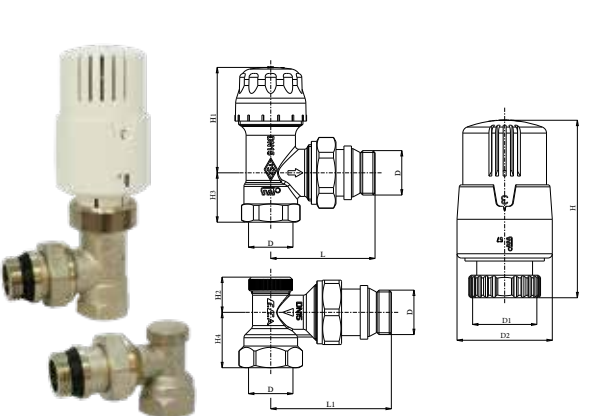

THERMOSTATIC RADIATOR VALVE SET WITH GASKET, STRAIGHT

TRV4, GVK												
Code	H	D	D1	D2	H1	H2	L2	L3	L	L1	Inbox Qty	
802120045	83	1/2"	M30x1,5	45	51	25	47	51,5	78	77	18	

EN 215, TS EN 215 (Up to 30% Energy Saving)

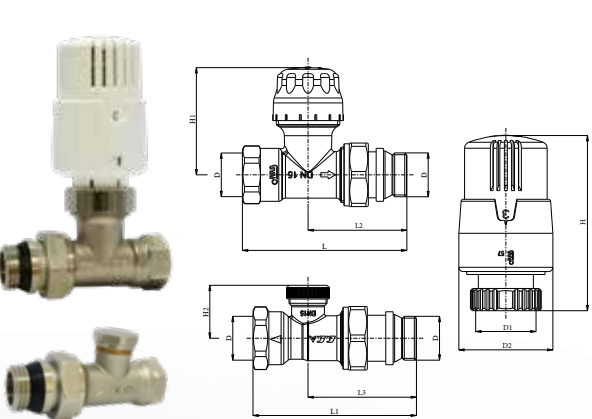


THERMOSTATIC RADIATOR VALVE SET HORIZONTAL AXIS

TRV4, GVK

Code		D	D1	L	B	H	Inbox Qty
602120881	TRV4	1/2"	M30x1,5	37,5	52,4	42,5	18
	GVK			48	23		

EN 215, TS EN 215 (Up to 30% Energy Saving)
• Heating Systems, 10 bar, 120°C

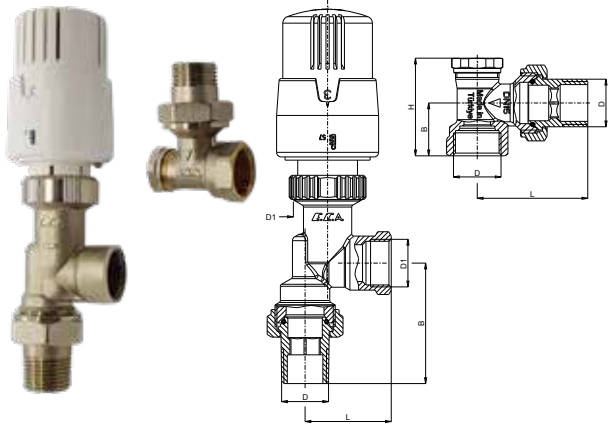


THERMOSTATIC RADIATOR VALVE SET HORIZONTAL AXIS

TRV4, GVK

Code		D	D1	d	L	B	H	Inbox Qty
602120883	TRV4	1/2"	M30x1,5	Ø16	39,6	49	50,5	18
	GVK				50,7	34		

EN 215, TS EN 215 (Up to 30% Energy Saving)
• Heating Systems, 10 bar, 120°C

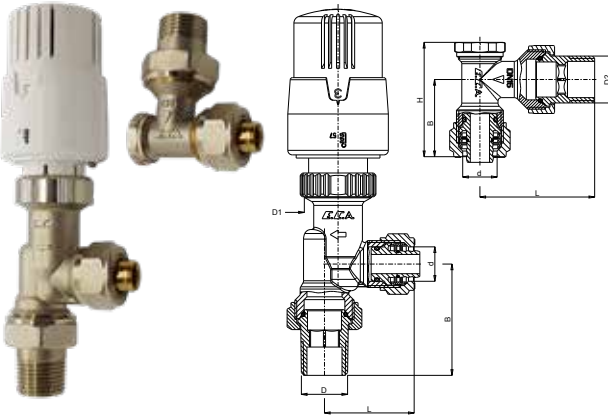


THERMOSTATIC RADIATOR VALVE SET HORIZONTAL AXIS

TRV4, GVK

Code		D	D1	L	B	H	Inbox Qty
602120884	TRV4	1/2"	M30x1,5	36,6	49	47,2	18
	GVK			50,6	31		

EN 215, TS EN 215 (Up to 30% Energy Saving)
• Heating Systems, 10 bar, 120°C

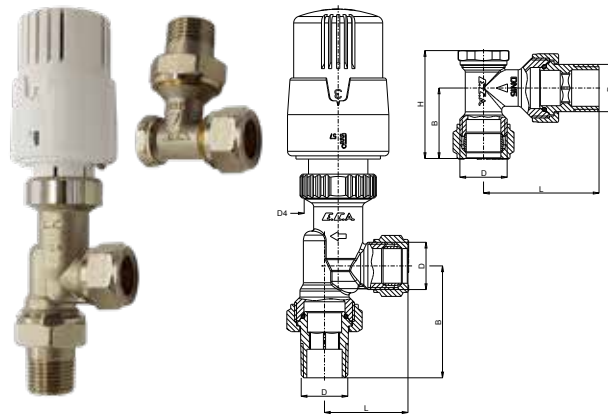


RADIATOR VALVE SET, ANGLE

RV3, GV3

Code		D	L	B	H	Inbox Qty
602120828	RV3	1/2"	51.7	23	75	18
	GV3		56.2	24,7	42,2	

• TS 579
• Heating Systems, 10 bar, 120°C

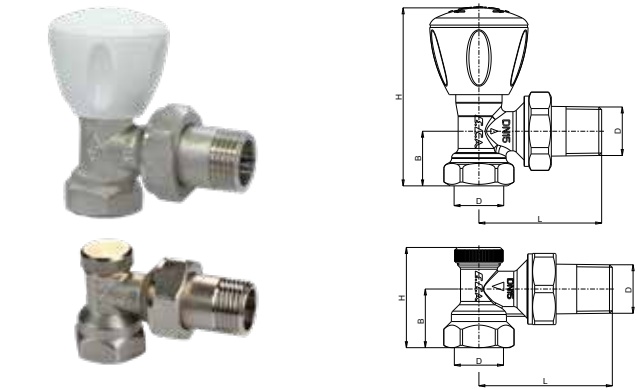


RADIATOR VALVE SET, STRAIGHT

RVK, GVK

Code		D	L	B	H	Inbox Qty
602120913	RVK	1/2"	75	27	60	18
	GVK				27	

• Heating Systems, 10 bar, 120°C

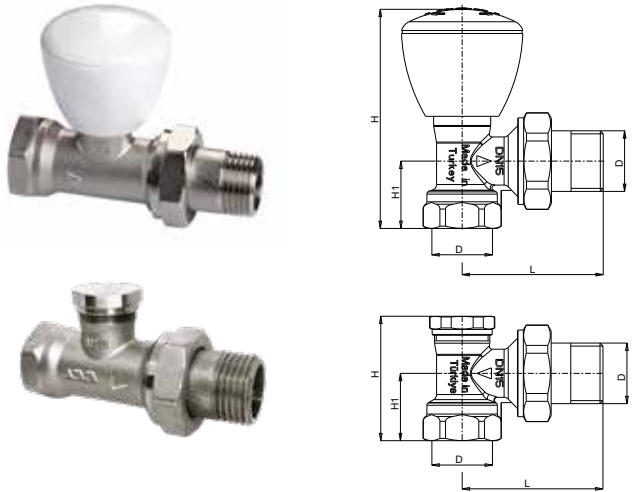


RADIATOR VALVE SET, ANGLE

RVK, GVK

Code		D	L	L1	H	Inbox Qty
602120874	RVK	1/2"	48	23	75	18
	GVK		48	23	42,5	

• Heating Systems, 10 bar, 120°C

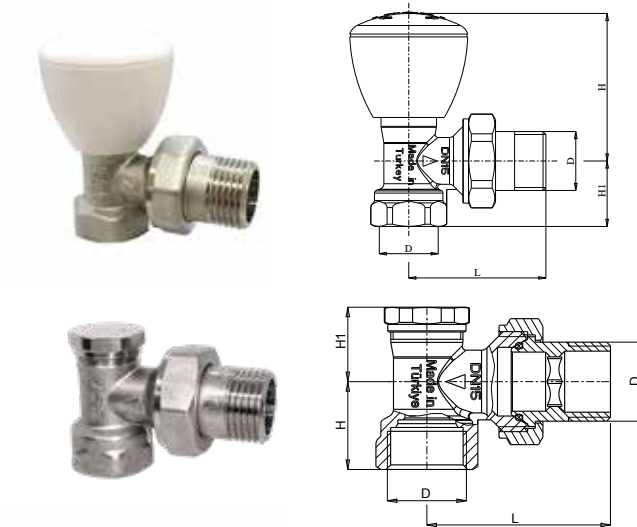


RADIATOR VALVE SET, STRAIGHT

RVK, GVK

Code		D	d	L	L1	H	Inbox Qty
802120067	RVK	1/2"	Ø16	88	48,5	60	18
	GVK			71,8	40,6	25	

• Heating Systems, 10 bar, 120°C

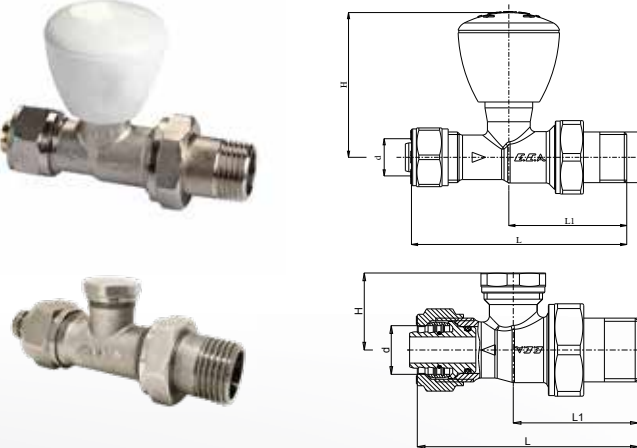

RADIATOR VALVE SET, ANGLE

Code		D	d	L	H1	H	Inbox Qty
602120875	RVK	1/2"	Ø16	48,3	35,2	87,5	18
	GVK			50,7	34	50,5	

- Heating Systems, 10 bar, 120°C

RADIATOR VALVE SET WITH GASKET, ANGLE




Code		D	d	L	H1	H	Inbox Qty
602120941	RVK	1/2"	Ø16	48,3	35,5	88	18
	GVK			50,7	35,5	55	

- Heating Systems, 10 bar, 120°C

RADIATOR VALVE SET, ANGLE

Code		D	d	L	H1	H	Inbox Qty
602120882	RVK	1/2"	Ø16	48,3	31	85	18
	GVK			50,7	32,5	47,3	

- Heating Systems, 10 bar, 120°C

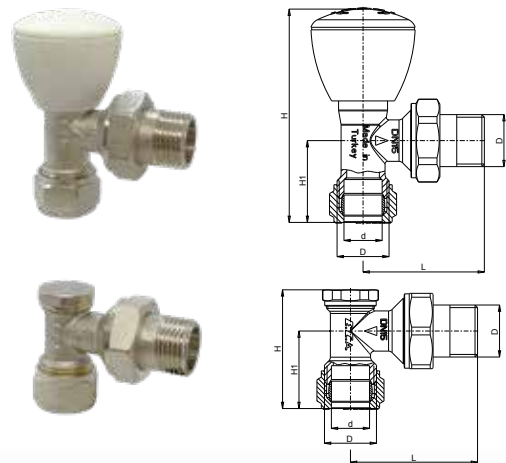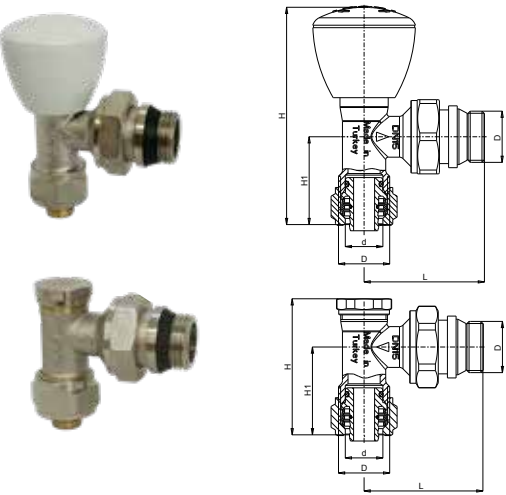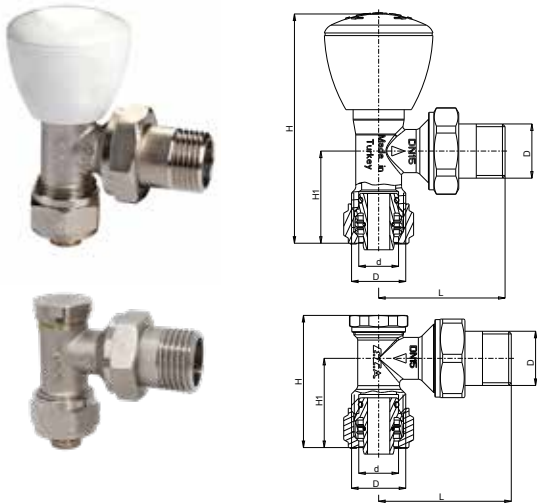

UNIONS, ANGLE

Code	D	L	H	Inbox Qty
601002001	3/8"	50	22	100
601002002	1/2"	56	26	80
601002003	3/4"	64	29	40
601002004	1"	72	34	25
601002005	1 1/4"	81.5	42	15

- TS 579
- Heating Systems, 10 bar, 120°C

UNIONS, ANGLE

Nickel Plated				
Code	D	L	H	Inbox Qty
602121001	3/8"	50	22	100
602121002	1/2"	56	26	80
602121003	3/4"	64	29	40
602121004	1"	72	34	25
602121005	1 1/4"	81.5	42	15

- TS 579
- Heating Systems, 10 bar, 120°C

UNIONS, STRAIGHT

Code	D	L	Inbox Qty
601002006	3/8"	48	125
601002007	1/2"	53	100
601002008	3/4"	58	70
601002009	1"	63	40
601002010	1 1/4"	71	25

- TS 579
- Heating Systems, 10 bar, 120°C



UNIONS, STRAIGHT

Nickel Plated			
Code	D	L	Inbox Qty
602121006	3/8"	50	125
602121007	1/2"	56	100
602121008	3/4"	64	70
602121009	1"	63	46
602121010	1 1/4"	81,5	25

- TS 579
- Heating Systems, 10 bar, 120°C

UNIONS, ANGLE

Code	D	H	L	Inbox Qty
601002075	1/2"	20,5	47,7	100
601002076	3/4"	24,5	54,2	80
601002077	1"	29	63,5	40
601002078	1 1/4"	36	77,5	25

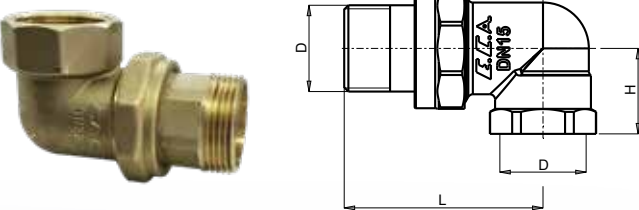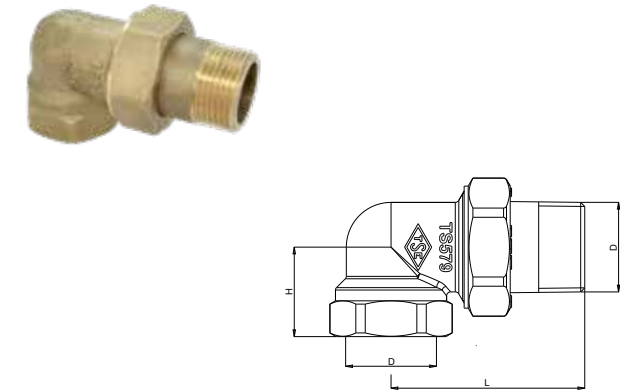


UNIONS, STRAIGHT

NEW


Code	D1	D2	Inbox Qty
601002071	40	G 1/2"	100
601002072	43	G 3/4"	70
601002073	48	G 1"	40
601002074	63	G1 1/4"	25

• Heating Systems, 10 bar, 120 °C




UNION, STRAIGHT, MALE

Code	D	d	L	Inbox Qty
602199272	1/2"	Ø16x2	36	150




UNION, STRAIGHT, FEMALE

Code	D	d	L	Inbox Qty
602199273	1/2"	Ø16x2	36	200



UNION, STRAIGHT, Pex Pipe Connection


Code	d	L	Inbox Qty
602199274	Ø16x2	50,3	150



AUTOMATIC AIR PURGER (WITH CHECK VALVE)

Code	D	D1	H	H1	Inbox Qty
102109139	R 3/8"	42	63	13	40
102109134	1/2"			12,7	


• TS 7817
• Heating Systems, 10 bar, 110°C

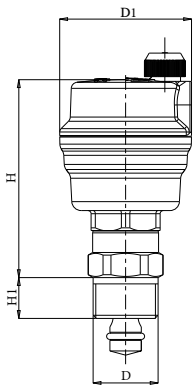

AUTOMATIC AIR PURGER (WITHOUT CHECK VALVE)

Code	D	D1	H	H1	Inbox Qty
602109013	G 3/8"	42	48	10	40
602109051	1/2"				


• TS 7817
• Heating Systems, 10 bar, 110°C



AUTOMATIC AIR PURGER (WITH CHECK VALVE), ANGLE

Code	D	D1	H	L	L1	Inbox Qty
602109033	G 3/8"	42	61,3	38,7	12,7	45
602109034	1/2"			38,5	13	


• TS 7817
• Heating Systems, 10 bar, 110°C



AUTOMATIC AIR PURGER (WITHOUT CHECK VALVE), ANGLE

Code	D	D1	H	L	Inbox Qty
602109037	G 3/8"	42	50,5	33,5	45
602109052	1/2"				


• TS 7817
• Heating Systems, 10 bar, 110°C



MAGNETIC FILTER SET

Code	D	D1	H	L	L1	H1	H2	Inbox Qty
601085001	1"	3/4"	289,5	83,5	53,5	207	218	4


Size: 1"
KVS: 8.7 m3/h
Magnet Power: 9000 Gauss
Capacity: 530 ml
Max. Working Temperature: 120 °C
Max. Working Pressure: 6 bar
Material: Brass, PA66-GF30%

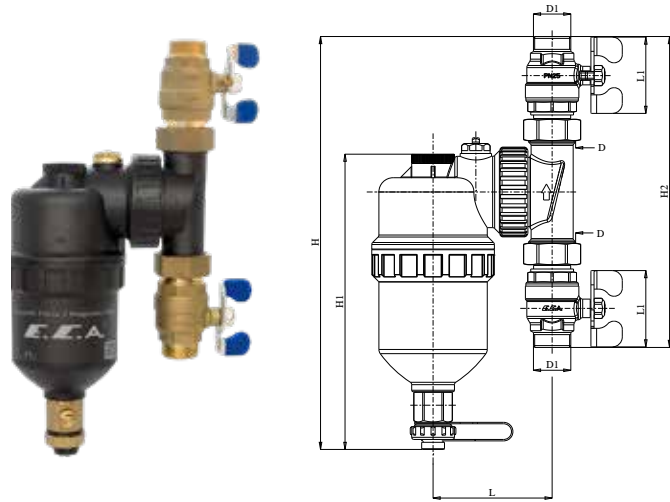

MAGNETIC FILTER

Code	D	H	H1	L	L1	Inbox Qty
602499987	1"	88	207	83,5	143	4


Size: 1"
KVS: 8.7 m3/h
Magnet Power: 9000 Gauss
Capacity: 530 ml
Max. Working Temperature: 120 °C
Max. Working Pressure: 6 bar
Material: Brass, PA66-GF30%

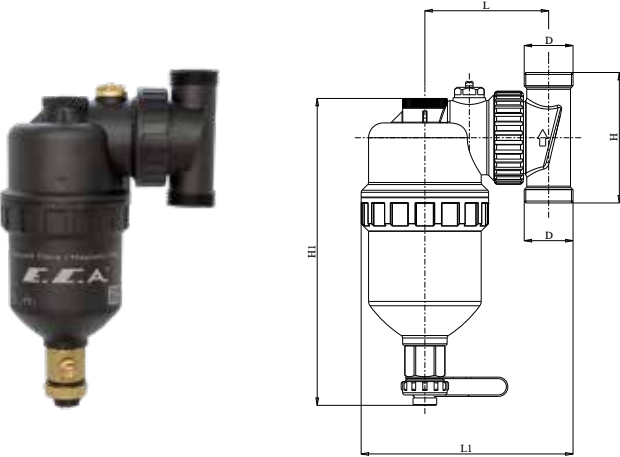

BALL VALVES WITH UNION
For Magnetic Filter

Code	d1	d2	d	L	A	H	Inbox Qty
602122380	3/4"	1"	Ø19	73	53,5	49,2	20


Size: 1" - 3/4"
Max. Working Temperature: 120 °C
Max. Working Pressure: 6 bar
Material: Brass

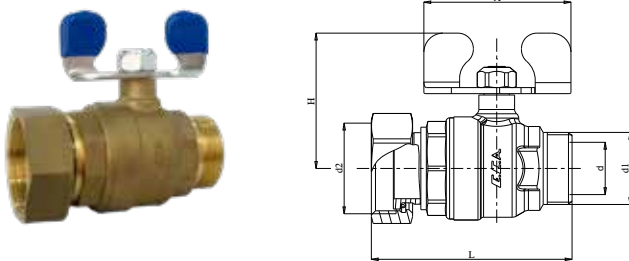

COMBINED SAFETY SET

Code	D	d	L	H	Inbox Qty
602111157	1"	1/2"	136	134	4


• Safety Valf 3 Bar

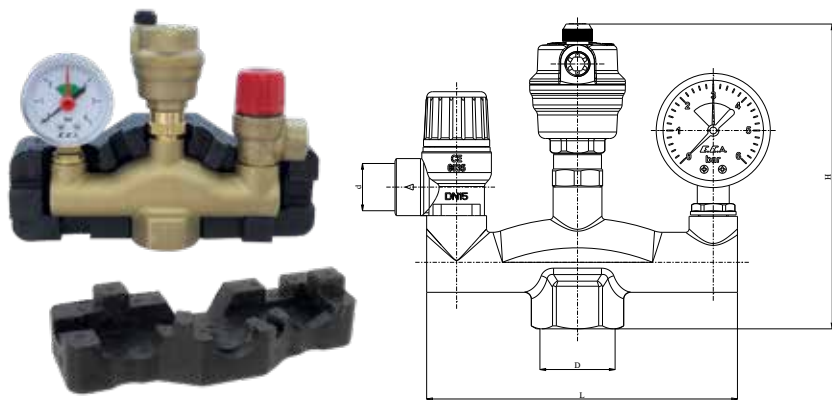

SAFETY VALVE

Code	D1	D2	B	L	C	H	AA/SW	Inbox Qty
602111027	Ø20	1/2"	13	27	25,5	41,5	25	50


• TS EN 4126-1

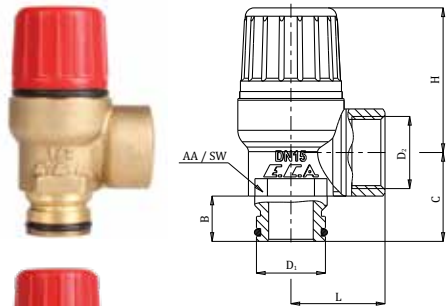

SAFETY VALVE

Code	Temp	Bar	D	H	H1	H2	L	Inbox Qty	
602111032	Boiler	110 °C	3	1/2"	25,5	41,5	13	27	50
602111092			4						
602111086			6						
602111113			8						
602111035	Solar	130 °C	3						


• TS EN 4126-1



SAFETY VALVE

Code	Temp	Bar	D	H	H1	H2	L	Inbox Qty	
602111031	Boiler	110 °C	3	1/2"	25,5	41,5	13	27	50
602111091			4						
602111085			6						
602111112			8						
602111061			4	3/4"	29,5	43,5	17		
602111062			6						
602111111			8						
602111034	Solar	130 °C	3	1/2"		41,5	13		


• TS EN 4126-1



SAFETY VALVE

Code	Temp	Bar	D	D1	H	H1	H2	L	Inbox Qty
602111097	Boiler	110 °C	3	1/2"	24,5	42,5	13	27	50
602111098			4						
602111108			6						

• TS EN 4126-1

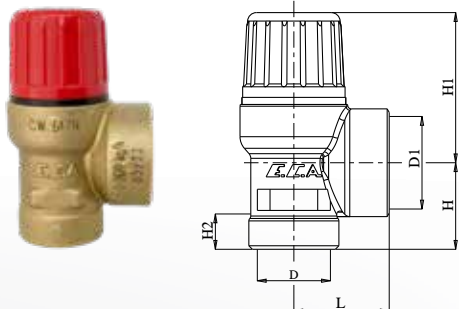

DIFFERENTIAL PRESSURE CONTROL VALVES

Code	T	D	B	L	H	Kvs	Setting	Inbox Qty
602111147	3/4"	61,5	29,5	71	123	2,3	20-60 kPa	20
602111154							5-25 kPa	

- Max. Working Temperature: 0 - 120 °C
- Max. Working Pressure: 16 bar
- Max. Differential Pressure: 250 kPa
- Material: CW617N

DIFFERENTIAL PRESSURE CONTROL VALVES

Code	T	D	L	H	Kvs	Setting	Inbox Qty
602111162	3/4"	61,5	65	117	2,3	20-60 kPa	20
602111150						5-25 kPa	
602111161	1"		71	122		20-60 kPa	
602111163						5-25 kPa	

- Max. Working Temperature: 0 - 120 °C
- Max. Working Pressure: 16 bar
- Max. Differential Pressure: 250 kPa
- Material: CW617N

DIFFERENTIAL PRESSURE CONTROL VALVES


Code	T	D	L	H	Kvs	Setting	Inbox Qty
602111152	1/2"	61,5	65	118,6	1,6	5-25 kPa	20
602111153						20-60kPa	
602111151	3/4"		71	123	2,3		

- Max. Working Temperature: 0 - 120 °C
- Max. Working Pressure: 16 bar
- Max. Differential Pressure: 250 kPa
- Material: CW617N

REDUCING TEE FOR IMPULSE TUBE

Code	D	H	L	Inbox Qty
802199227	3/4"	26	71	40
802199137	1"	26	71	20

- Max. Working Temperature: 0 - 120 °C
- Max. Working Pressure: 16 bar
- Max. Differential Pressure: 250 kPa
- Material: CW617N

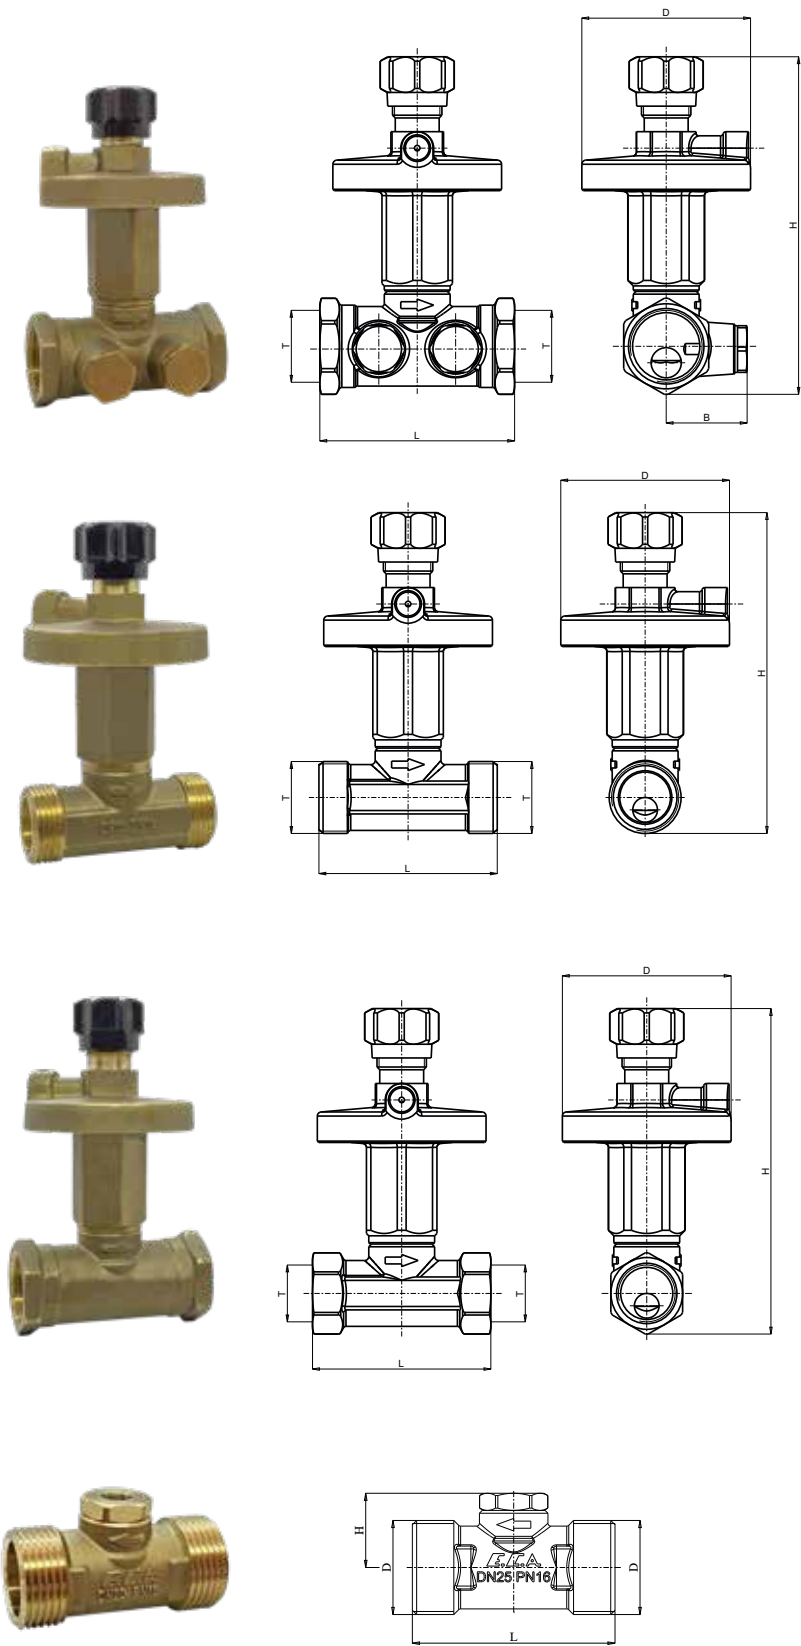

DIFFERENTIAL PRESSURE CONTROL VALVES

Code	DN	A	B	C	D	Inbox Qty
602111090	25	1"	85	120	Ø68	20

- Differential Pressure Control Range: 25-60 kPa
- Max. Working Temperature: 0 - 120 °C
- Max. Working Pressure: 16 bar
- Max. Differential Pressure: 250 kPa
- Material: CW617N

STATIC BALANCING VALVE

Code	DN	A	B	C	D	Inbox Qty
602111058	25	1"	85	70	Ø68	20

- Max. Working Temperature: 0 - 120 °C
- Max. Working Pressure: 16 bar
- Max. Differential Pressure: 250 kPa
- Material: CW617N

IMPULSE TUBE WITH O-RINGS


Code	Size		Inbox Qty
602499438	G1/8"	G1/8"	48
802199128		M8x1	
802199129		G1/8"	
802199130		M8x1	850

- Material: CW617N, Brass

IMPULSE TUBE ADAPTER

Code	D	D1	L	Inbox Qty
602499437	1/4"	1/8"	17,5	48

- Material: CW617N

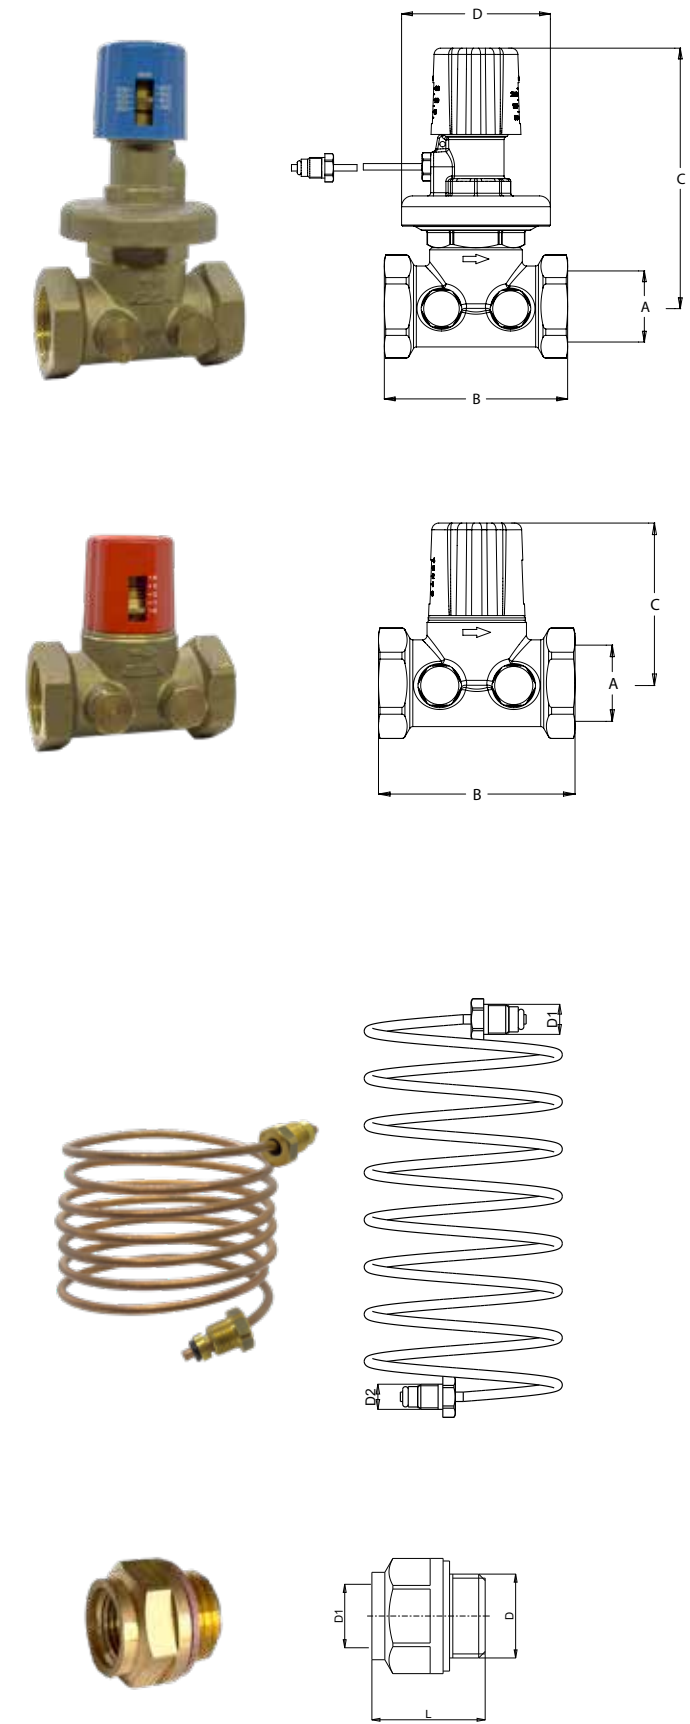

MANIFOLD WITH MANUAL FLOW ADJUSTMENT HANDWHEEL

Code	Code	Number of Outlet	D	d	L	H	H1	Inbox Qty
602120695	Red	2	1"	Ø16	98,5	93,5	40	5
602120694	Blue							
602120680	Red	3				136,5		5
602120669	Blue							
602120681	Red	4				179,5		9
602120670	Blue							
602120682	Red	5				222,5		12
602120671	Blue							
602120683	Red	6				265,5		6
602120672	Blue							
602120684	Red	7				308,5		6
602120673	Blue							
602120685	Red	8				351,5		8
602120674	Blue							
602120686	Red	9				394,5		8
602120675	Blue							
602120687	Red	10				437,5		4
602120676	Blue							
602120688	Red	11				480,5		4
602120677	Blue							
602120689	Red	12				523,5		4
602120678	Blue							
602120690	Red	13				566,5		4
602120679	Blue							

- Manifold are equipped with purger.
- Outlet connection options for Ø17 x 2 mm pex pipe and 15 x 2 mm copper pipe
- Manifolds are nickel plated

Mounting brackets are not included. Manifold's end cap and PEX fittings are included.

MANIFOLD WITH MANUAL FLOW ADJUSTMENT HANDWHEEL

Code	Code	Number of Outlet	D	d	L	H	H1	Inbox Qty
602120608	Red	7	1 1/4"	Ø16x2	95,1	296.5	40	4
602120601	Blue							
602120609	Red	8				336.5		6
602120602	Blue							
602120610	Red	9				376.5		6
602120603	Blue							
602120611	Red	10				416.5		2
602120604	Blue							
602120612	Red	11				456.5		2
602120605	Blue							
602120613	Red	12				496.5		2
602120606	Blue							
602120614	Red	13				536.5		2
602120607	Blue							

- Manifold are equipped with purger.
- Outlet connection options for Ø17 x 2 mm pex pipe and 15 x 2 mm copper pipe
- Manifolds are nickel plated






Mounting brackets are not included. Manifold's end cap and PEX fittings are included.

CONSOLE FO1" MANIFOLDS

Code	L	L1	H	Inbox Qty
610212001	280	72,85	15,5	10

- Wall fixing screws is not included

For Manual Flow Adjustment Handwheel

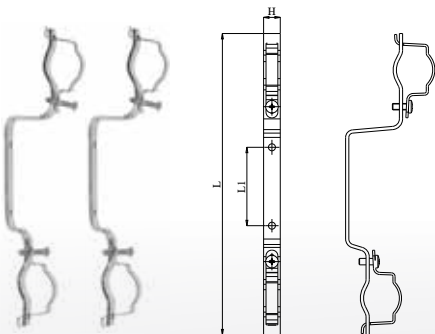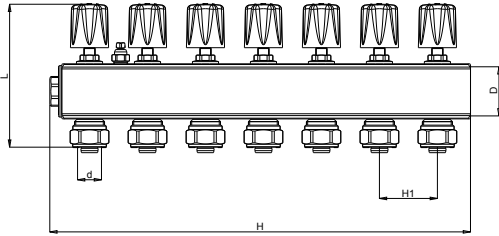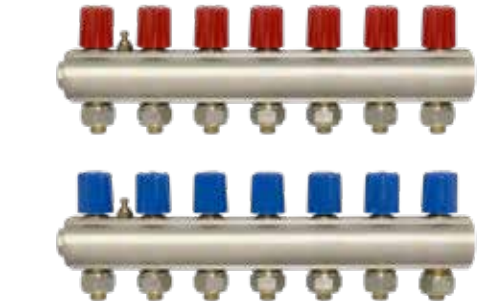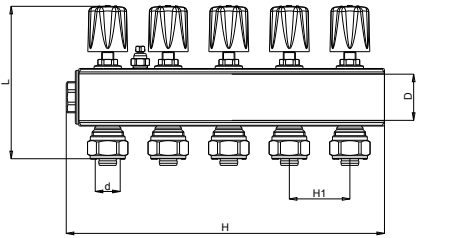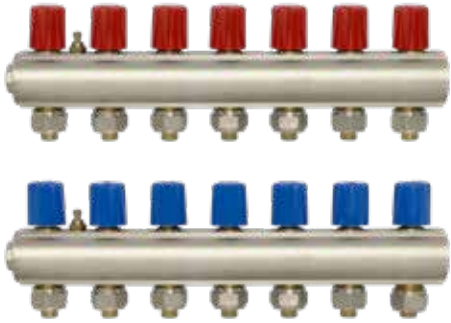

MANIFOLD WITH MANUAL FLOW ADJUSTMENT HANDWHEEL, EUROCONE CONNECTION



Code	Number of Outlet	D	D1	H	L	L1	Inbox Qty
802120071	2	1"	3/4"	95,6	92	50	5
802120072	3				142		5
802120073	4				192		9
802120074	5				242		12
802120075	6				292		6
802120076	7				342		6
802120077	8				392		8
802120078	9				442		8
802120079	10				492		4
802120080	11				542		4
802120081	12				592		4
802120082	13				642		4

- Manifold are equipped with purger.
- Outlet connection options for Ø17 x 2 mm pex pipe and 15 x 2 mm copper pipe
- Manifolds are nickel plated
- Outlet Eurocone Connection

MODULAR MANIFOLD

Code	Number of Outlet	D	D1	D2	L	L1	Inbox Qty
601026297	2	G 1"	G 1/2"	Ø16	90	38	6
601026298	3				128		9
601026299	4				166		


- Teflon, flax, etc. should not be applied to the connection threads between collectors.
- Hot water heating systems, 10 bar, 120 °C
- 17x2 mm or 15x2 mm coupling options will be manufactured to order and priced separately.
- The suspension set and collector cap must be purchased separately.

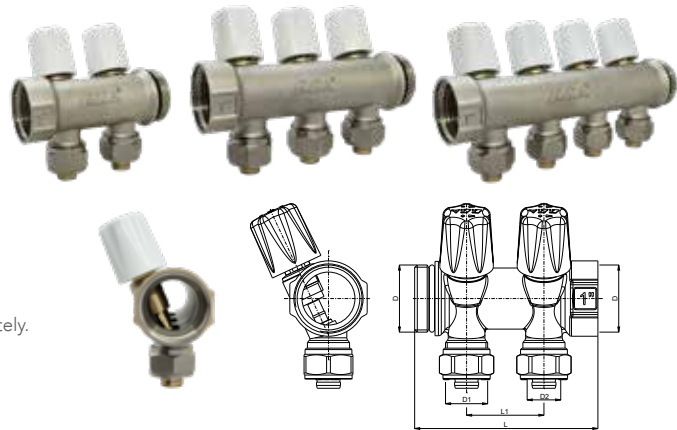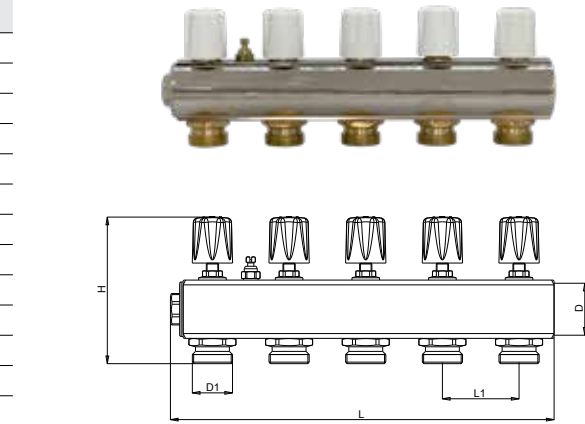

MODULAR MANIFOLD WITH MINI BALL VALVES

Code	Number of Outlet	D	D1	D2	L	L1	H	Inbox Qty
601026300	2	G 1"	G 1/2"	Ø16x2	90	38	54	6
601026301	3				128			9
601026302	4				166			

- Teflon, flax, etc. should not be applied to the connection threads between collectors.
- Hot water heating systems, 10 bar, 120 °C
- 17x2 mm or 15x2 mm coupling options will be manufactured to order and priced separately.
- The suspension set and collector cap must be purchased separately.

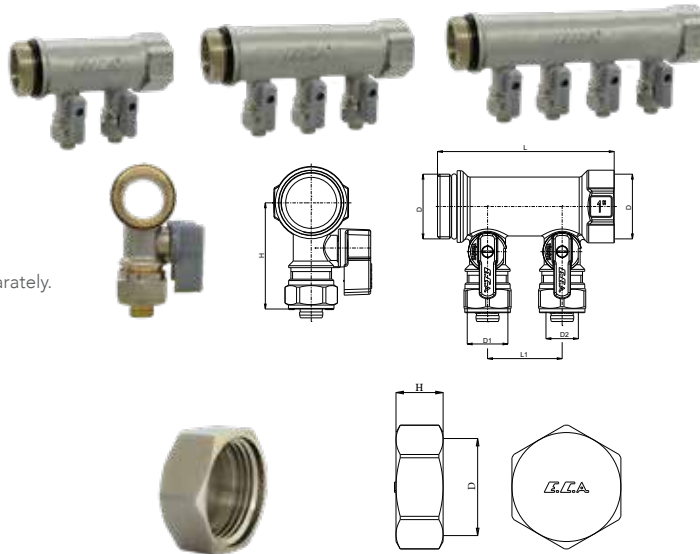

MANIFOLD CAP, FEMALE

Code	D	H	Inbox Qty
610701637	G 1"	16	120

CONSOLE FO1" MANIFOLDS

Code	L	L1	H	Inbox Qty
610212001	280	72,85	15,5	10

MANIFOLD SET WITH FLOWMETER

Code	Number of Outlet	H	L	L1	D	D1	Inbox Qty
601026097	2	79,5	128,5	60	1"	3/4"	12
601026098	3		188,5				9
601026099	4		248,5				6
601026100	5		308,5				4
601026101	6		368,5				4
601026102	7		428,5				4
601026103	8		488,5				3
601026104	9		548,5				3
601026105	10		608,5				3
601026106	11		668,5				2
601026107	12		728,5				2
601026108	13		788,5				2

- Operating Pressure: 6 bar
- Test pressure: 10 bar (20°C)
- Flowmeter operating temperature: -10°C, +70°C
- Access manifold has flow regulation clack and indicator
- Return manifold has flow regulation valve
- Included manifold's plug

Bleed valve, manifold's end cap, mounting brackets and PEX fittings are not included.

MANIFOLD SET WITHOUT FLOWMETER

Adjustable with Allen Wrench

Code	Number of Outlet	H	L	L1	D	D1	Inbox Qty
601026214	2	79,5	128,5	60	1"	3/4"	12
601026215	3		188,5				9
601026216	4		248,5				6
601026217	5		308,5				4
601026218	6		368,5				4
601026219	7		428,5				4
601026220	8		488,5				3
601026221	9		548,5				3
601026222	10		608,5				3
601026223	11		668,5				2
601026224	12		728,5				2
601026225	13		788,5				2

- Operating Pressure: 6 bar
- Test pressure: 10 bar (20°C)
- Access manifold has flow regulation valve
- Return manifold has flow regulation valve

Bleed valve, manifold's end cap, mounting brackets and PEX fittings are not included.

MANIFOLD SET WITHOUT FLOWMETER

Code	Number of Outlet	D	D1	H	L	L1	Inbox Qty
601026109	2	1"	3/4"	79,5	128,5	60	12
601026110	3				188,5		9
601026111	4				248,5		6
601026112	5				308,5		4
601026113	6				368,5		4
601026114	7				428,5		4
601026115	8				488,5		3
601026116	9				548,5		3
601026117	10				608,5		3
601026118	11				668,5		2
601026119	12				728,5		2
601026120	13				788,5		2

- Operating Pressure: 6 bar
- Test pressure: 10 bar (20°C)
- Return manifold has flow regulation valve

Bleed valve, manifold's end cap, mounting brackets and PEX fittings are not included.

CONSOLE FOR UNDERFLOW HEATING MANIFOLDS

Code	L	L1	H	Inbox Qty
610212003	279,5	75	20	10




- For Brass Collector

MANIFOLD CAP

Code	D	H	Inbox Qty
602199121	1"	19	80

UNION, EUROCONE

Code	L	D	d	Inbox Qty
602199343	25	3/4"	Ø16x2	80
602399929	21	3/4"	Ø17x2	80

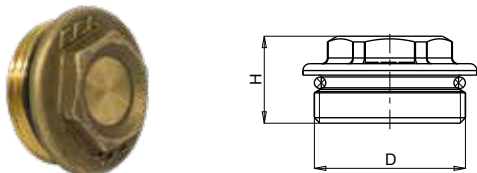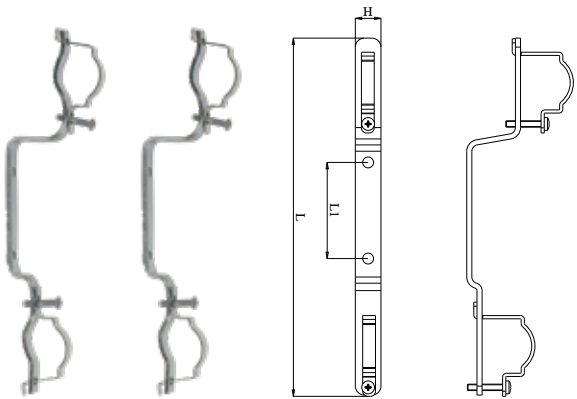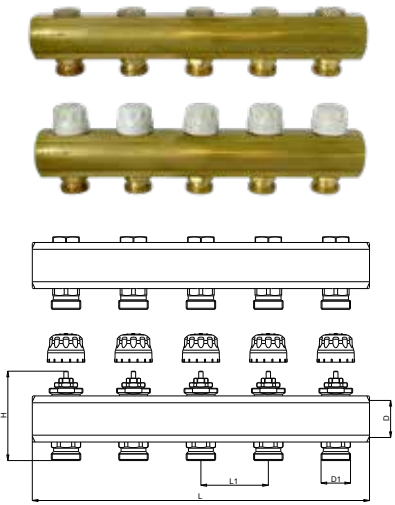


STAINLESS STEEL MANIFOLD SET WITH FLOWMETER

Code	Number of Outlet	H	L	L1	D	D1	D2	Inbox Qty
802120217	2	79,5	184,5	50	1"	3/4"	3/4"	12
802120218	3		234,5					9
802120219	4		184,5					6
802120220	5		334,5					4
802120221	6		384,5					4
802120222	7		434,5					4
802120223	8		484,5					3
802120224	9		534,5					3
802120225	10		584,5					3
802120226	11		634,5					2
802120227	12		684,5					2

- Operating Pressure: 6 bar
- Test pressure: 10 bar (20°C)
- Flowmeter operating temperature: -10°C , +70°C
- Access manifold
- Return manifold has flow regulation valve
- Included manifold's plug
- Return manifold has flow regulation valve

Drain valve and manifold's end cap are included. Mounting brackets and PEX fittings are not included.

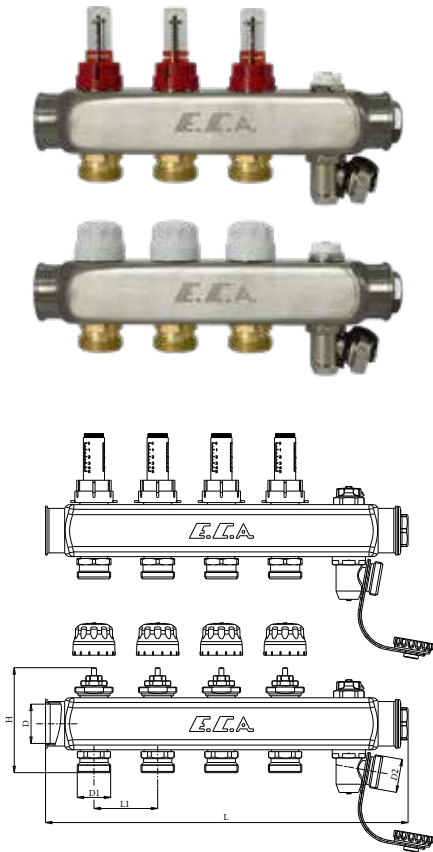


STAINLESS STEEL MANIFOLD SET WITH FLOWMETER

Code	Number of Outlet	L	L1	D	D1	Inbox Qty
802120232	2	126,5	50	1"	3/4"	12
802120233	3	176,5				12
802120234	4	226,5				9
802120235	5	276,5				4
802120236	6	326,5				4
802120237	7	376,5				4
802120238	8	426,5				4
802120239	9	476,5				3
802120240	10	526,5				3
802120241	11	576,5				3
802120242	12	626,5				2
802120243	13	676,5				2

- Operating Pressure 6 bar
- Test pressure 10 bar (20°C)
- The return collector has a line adjustment valve suitable for actuator mounting.

Drain valve, manifold's end cap, mounting brackets and PEX fittings are not included.

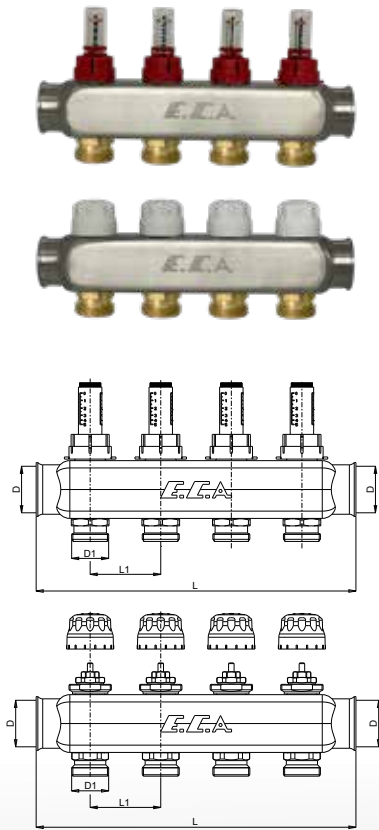


STAINLESS STEEL MANIFOLDS SET WITH ALLEN WRENCH

Code	Number of Outlet	D	D1	L	L1	Inbox Qty
802120250	2	1"	3/4"	126,5	50	12
802120251	3			176,5		12
802120252	4			226,5		9
802120253	5			276,5		4
802120254	6			326,5		4
802120255	7			376,5		4
802120256	8			426,5		4
802120257	9			476,5		3
802120258	10			526,5		3
802120259	11			576,5		3
802120260	12			626,5		2
802120261	13			676,5		2

- Operating Pressure 6 bar
- Test pressure 10 bar (20°C)
- The return collector has a line adjustment valve suitable for actuator mounting.


Drain valve, manifold's end cap, mounting brackets and PEX fittings are not included.

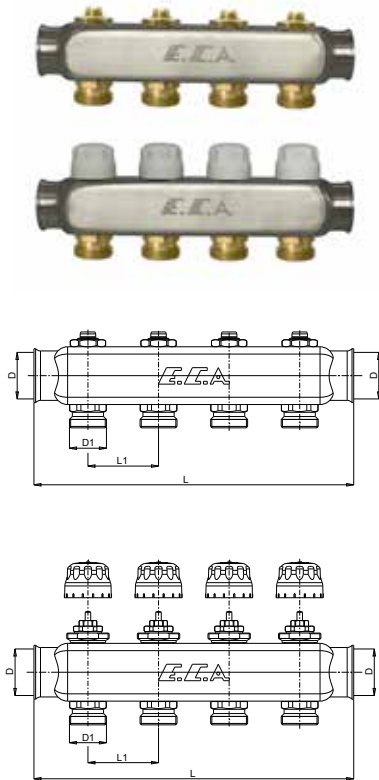

CONSOLE FOR UNDERFLOW HEATING MANIFOLDS

Code	L	L1	H	Inbox Qty
610212011	294	75	75	10


For stainless steel manifolds

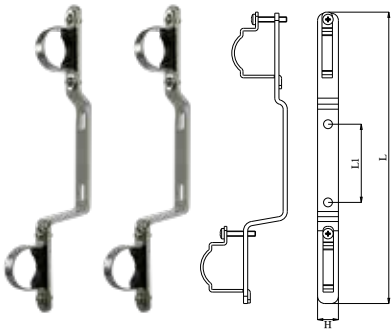

MANIFOLD CAP

Code	D	H	Inbox Qty
802199036	1"	19	80

For stainless steel manifolds

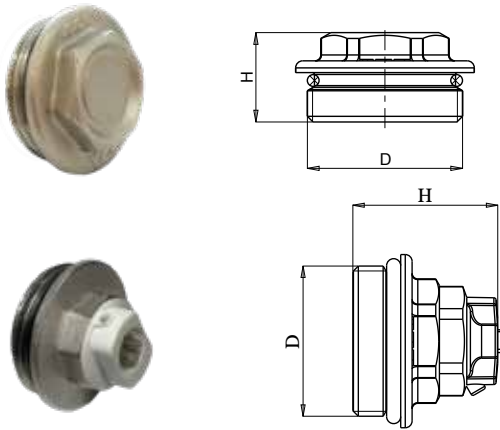


MANIFOLD CAP WITH PURGER, MALE

NEW

Code	D	H	Inbox Qty
802199187	G 1"	24	120

UNION, EUROCONE


Code	L	D	d	Inbox Qty
602199343	25	3/4"	Ø16x2	80
602399929	21	3/4"	Ø17x2	80

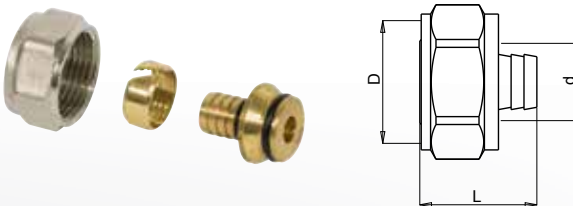

BUTTON DIGITAL ROOM THERMOSTAT SET

Code	L	H	Inbox Qty
601021056	86	86	5


- Switching Capacity: 5A 250VAC / 3A 30VDC
- Supply Voltage: 100-240 VAC
- 50/60 Hz
- CE Certified

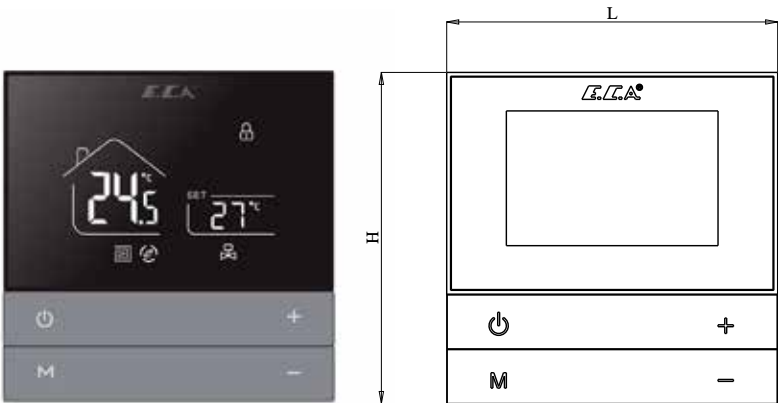

DIGITAL ROOM THERMOSTAT

Code	L	H	Inbox Qty
601021057	86	86	5


- Switching Capacity: 5A 250VAC / 3A 30VDC
- Supply Voltage: 100-240 VAC
- 50/60 Hz
- CE Certified
- Touch Key Panel

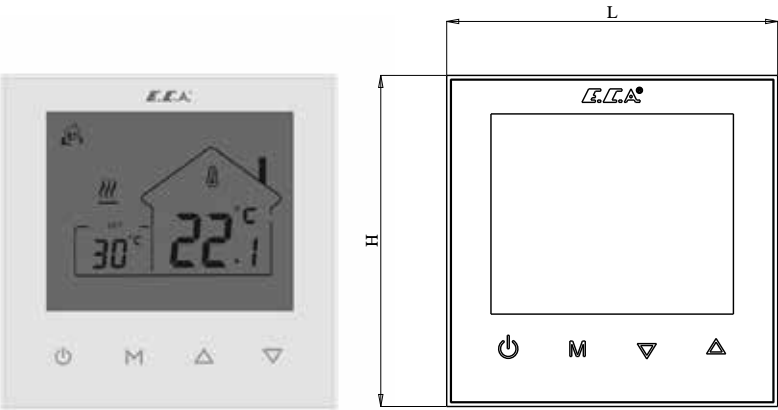

TOUCH DIGITAL ROOM THERMOSTAT

Code	L	H	Inbox Qty
601021058	85	85	5
601021059 WiFi			


- Switching Capacity: 5A 250VAC / 3A 30VDC
- Supply Voltage: 100-240 VAC
- 50/60 Hz
- CE Certified
- Full Touchscreen Display
- Can be controlled from the application (for code 601021059 WiFi model)

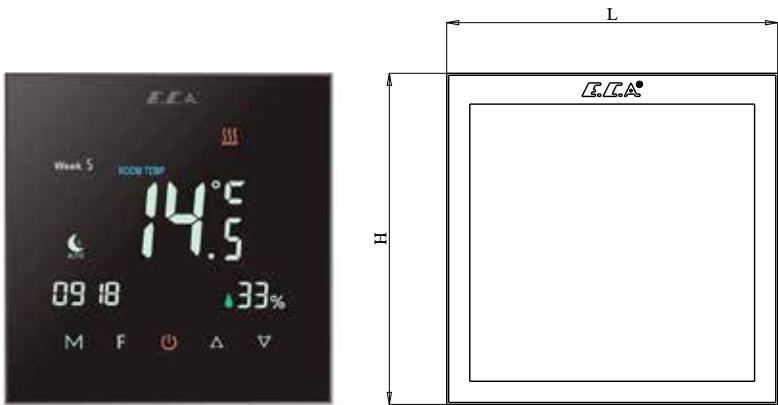

THERMAL CONTROL VALVE MOTOR 230 (ACTUATOR)

Code	T	L	L1	Inbox Qty
802120231	M30x1.5	72	47	12


- Easy assembly with quick fit
- Supply Voltage 220 V
- Maximum Inrush Current 150 mA
- Operating Power Consumption 1.7 W
- Spindle Movement Time 3.5 min.
- Stroke 4.5 mm
- Actuating Force NC: 110 N
- IP 54
- Cable Length 750 mm
- Normally Closed (NC)
- Normally Open (NO)

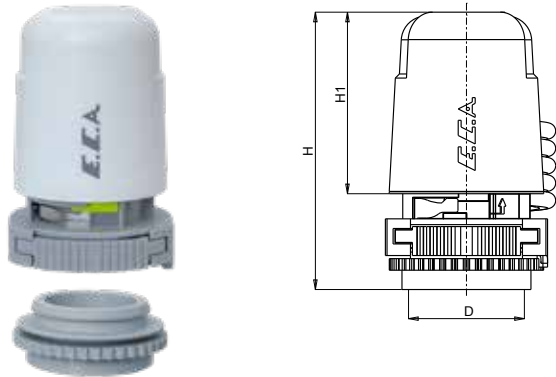

MAIN CONTROL UNIT

Code	L	H	Inbox Qty
601021035	84	228	3


- CE
- Room thermostat, actuator, pump and mixing valves integration control
- Breaker for indicator
- Electrical and thermal safety
- Power source: 100-240 VAC 50/60 Hz
- Max. Total Current: 6 A
- Operating Temperature: -20 °C -60°C
- Storage Temperature: -20 °C -70 °C
- For 8 pcs Thermostat, 16 pcs Adapter

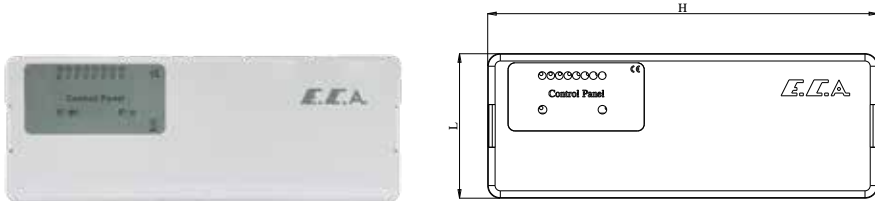

2 WAY VALVE WITH ACTUATOR, WITH UNION (OUTLET)


Code	D	L	H	H1	Inbox Qty
602120747	1"	106	98,8	59,8	2

- Easy assembly with quick fit
- Supply Voltage 220 V
- Maximum Inrush Current 150 mA
- Operating Power Consumption 1.7 W
- Spindle Movement Time 3.5 min.
- Actuating Force NC: 110 N
- IP 54
- Cable Length 750 mm
- Normally Closed (NC)
- PN 16
- Max. Operating Temperature: +80°C
- Max. Operating Pressure: 10 bar

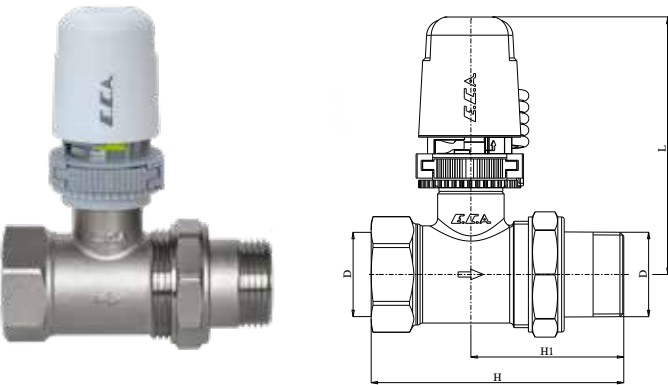

UNION, EUROCONE


Code	L	D	d	Inbox Qty
602199343	25	3/4"	Ø16x2	80
602399929	21	3/4"	Ø17x2	80

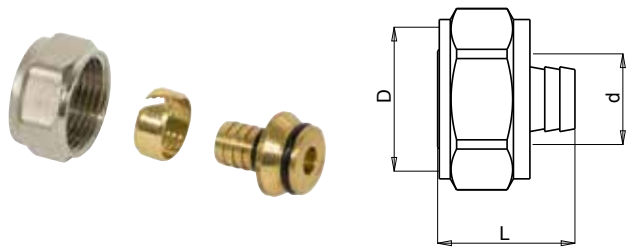

AUTOMATIC AIR-WATER DRAIN SET

Code	Color	D2	H	H1	L	D	D1	Inbox Qty
602399746	Red	1"	168	80	30	Ø42	Ø14,5	10
602399747	Blue							
602499897	Red Nickel							
602499898	Blue Nickel							


- Automatic air vent, hose end drain valve, T-fittings and Reducer Contains plug.
- Maximum Operating Temperature: +80°C
- Maximum Working Pressure: 10 bar

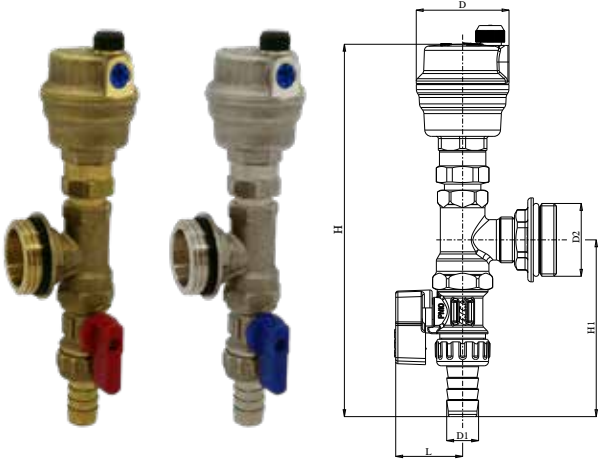

MANUAL AIR-WATER DRAIN SET

Code	Color	D1	H	H1	L	D	Inbox Qty
802199042	Red	1"	116	80	30	Ø14,5	14
802199002	Blue						
802199044	Red Nickel						
802199043	Blue Nickel						


- Manuel Air Vent, Hose End Drain Cock, T-Fittings and Reducer Contains Plug.
- Maximum Operating Temperature: +80°C
- Maximum Working Pressure: 10 Bar

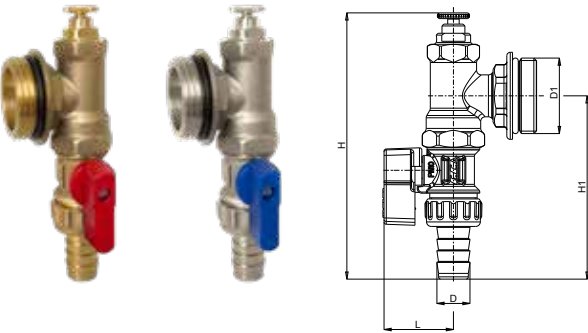

AUTOMATIC AIR RELEASE (WITHOUT CHECK VALVE), CORNER

Code	D2	D	H	L	Inbox Qty
602499990	1"	Ø42	50,5	42,5	25
602109064 Nickel Plated					

- TS 7817
- Heating Systems, 10 bar, 110°C
- Suitable for collector output connection

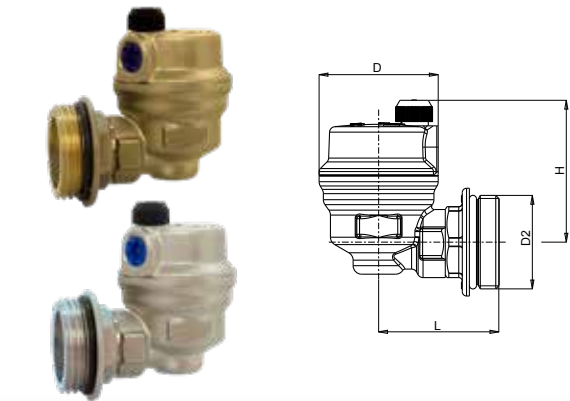

BALL VALVE, W/UNION, BUTTERFLY HANDWHEEL


Type 2 - Nickel Plated

Code	Color	D	L	H	H1	Inbox Qty
102122205	Red	1"	58,5	89	68,5	20
102122347	Blue					
602122180	Red	G1 1/4"	58,5	125	82,5	12
602122181	Blue	G1 1/4"				
602122359	Blue	1/2"	48,5	76,5	53,5	40
602122360	Blue	1/2"	46,5	76,5		
602122363	Red	3/4"	51,7	90,8		30
602122364	Blue	3/4"	49,7	90,8		

Type 2 - Without Nickel Plated

Code	Color	D	L	H	H1	Inbox Qty
601027412	Red	1"	53	89	60	20
601027413	Blue					

- PN 16
- Max. Operating Temperature: +80°C
- Max. Operating Pressure: 10 bar

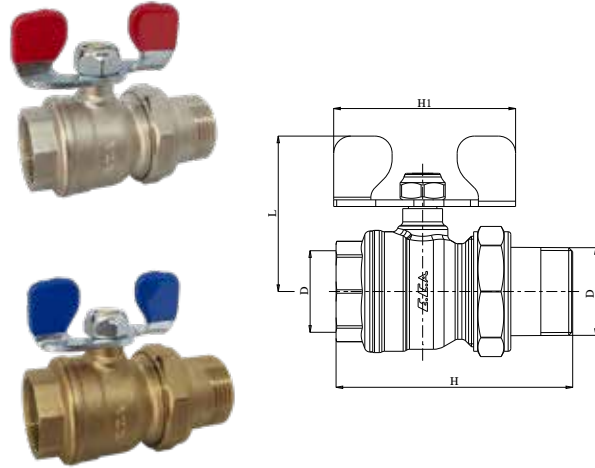


BALL VALVE WITH THERMOCOUPLE OUTLET, W/UNION

Type 2

Code	Color	D	L	H	H1	H2	Inbox Qty
602122157 Nickel Plated	Red	1"	58.5	89	56,5	68.5	15
601027416							


- PN 16
- Max. Operating Temperature: +80°C
- Max. Operating Pressure: 10 bar

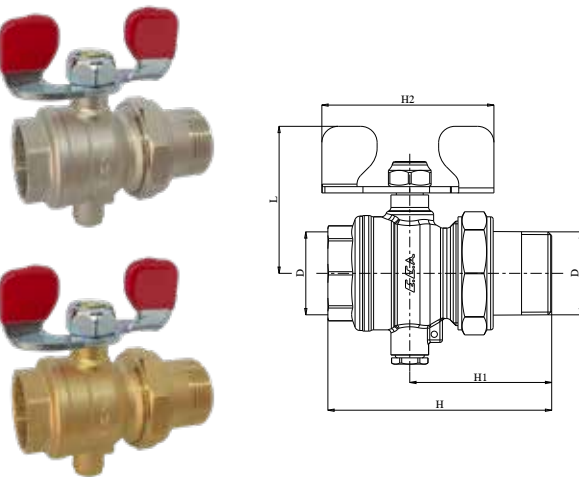

FANCOIL VALVES
MALE x MALE


2 Way					
Code	D	Direct Pass Kv Value	H	L	Inbox Qty
601006281	1/2"	1,82	45	52	12
601006289	3/4"	2,85	46	56	
601006290	1"	4,50	55,4	78	20

- Nominal pressure: 16 Bar (Operating Max. Pressure)
- Operating Temperature: -10 °C...110 °C
- Liquid: Water (Maximum glycol concentration 50%)
- Stroke: 2,5 mm




3 Way							
Code	D	Direct Pass Kv Value	Bypass Kv Value	H	H1	L	Inbox Qty
601006259	1/2"	0.85 m³/h	0.80 m³/h	46,5	27,5	52	12

- Nominal pressure: 16 Bar (Operating Max. Pressure)
- Operating Temperature: -10 °C...110 °C
- Liquid: Water (Maximum glycol concentration 50%)
- Stroke: 2,5 mm



3 Way - 4 Port								
Code	D	Direct Pass Kv Value	Bypass Kv Value	H	H1	H2	L	Inbox Qty
601006262	1/2"	0.85 m³/h	0.75 m³/h	46,5	35	19,5	52	12


- Nominal pressure: 16 Bar (Operating Max. Pressure)
- Operating Temperature: -10 °C...110 °C
- Liquid: Water (Maximum glycol concentration 50%)
- Stroke: 2,5 mm

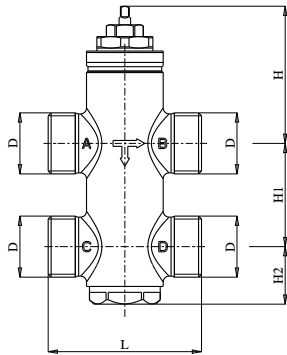

FANCOIL VALVES
WITH UNION

2 Way - Union				
Code	D	L1	L	Inbox Qty
602120781	1/2"	49,2	80,2	25
602120193-01	3/4"	61,3	96,3	15
802120089	1"	59,8	98,8	25


- Nominal pressure: 16 Bar (Operating Max. Pressure)
- Operating Temperature: -10 °C...110 °C
- Liquid: Water (Maximum glycol concentration 50%)
- Stroke: 2,5 mm



THERMAL CONTROL VALVE MOTOR (ACTUATOR) 230V

Code	D	H	H1	Inbox Qty
802120231	M30x1.5	72	47	12

- Easy assembly thanks to quick assembly
- Supply Voltage 220 V
- Maximum Inrush Current 150 mA
- Operating Power Consumption 1.7 W
- Spindle Movement Time 3.5 min.
- Stroke 4.5 mm
- Actuating Force NC: 110 N
- IP 54
- Cable Length 750 mm
- Normally Closed (NC)




FANCOIL THERMOSTATS

Digital - Recessed

Code	L	H	Inbox Qty
601021041	88	88	5

Technical Specifications

- Power Supply: 100~240 VAC 50/60Hz
- Fan Relay Induction Current: 3(2)A
- Heating/Cooling Relay Induction Current: 3(2)A
- Room Temperature Control Range: 5°C - 35°C
- Protection Class: IP21
- Working Environment: 0 - 50°C, 5-95% RH
- Hysteresis: ±1 °C




Mechanical - Surface Mounted

Code	L	H	Inbox Qty
601021040	84,5	84,5	5

Technical Specifications

- Power Supply: 220 -240 VAC, 50/60 Hz
- Current: 6(5) A
- Protection Class: IP21

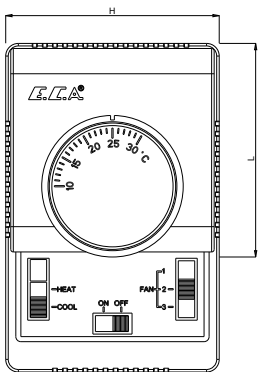

NATURAL GAS BALL VALVES, MOP 0.5

Type 1 - Suitable for Internal Building Usage for Natural Gas Installation

Code	D	H	L	A	Inbox Qty
602122151	Rp 1/2"	37,3	59,2	82,5	60
602122152	Rp 3/4"	40,7	68,2	82,5	48
602122153	Rp 1"	47,5	83	100	30
602122154	Rp 1 1/4"	64,3	97	154,5	16
602122155	Rp 1 1/2"	69,3	103	154,5	9
602122156	Rp 2"	79,5	127	185	5

- Pass the 30 min. perform test due to EN 331
- Suitable for internal building usage for natural gas installation
- EN331, System 1 CE
- -20 °C, +60 °C

NATURAL GAS BALL VALVES WITH LOCK PIN, MOP 0.5

Type 1 - Suitable for Internal Building Usage for Natural Gas Installation

Code	D	L	L	A	Inbox Qty
602122175	Rp 1/2"	37,3	59,2	83	40
602122176	Rp 3/4"	40,7	68,2		30
602122177	Rp 1"	47,5	83	100	20

- Pass the 30 min. perform test due to EN 331
- Suitable for internal building usage for natural gas installation
- EN331, System 1 CE
- -20 °C, +60 °C

NATURAL GAS BALL VALVES, MOP 5

Type 1 - Suitable for Internal Building Usage for Natural Gas Installation

Code	D	H	L	A	Inbox Qty
602122205	Rp 1/2"	37.3	59.2	82.5	60
602122206	Rp 3/4"	40.7	68.2		48
602122207	Rp 1"	47.5	83	100	30
602122208	Rp 1 1/4"	64.3	97	154.5	16
602122209	Rp 1 1/2"	69.3	103		9
602122210	Rp 2"	79.5	127	185	5

- Suitable for external building usage for natural gas installation
- EN331, System 3
- -20 °C, +60 °C


NATURAL GAS BALL VALVES, PN25

Type 2




Code	D	L	A	H	Inbox Qty
602122211	1/2"	46	83	37.3	60
602122212	3/4"	54	83	40.7	48
602122213	1"	67	100	47.5	30
602122214	1 1/4"	78	154,5	64,3	16
602122215	1 1/2"	90	154,5	70,2	9
602122216	2"	108	185	80,6	5

- Operating Temperature Range: -20°C, +60°C

CE

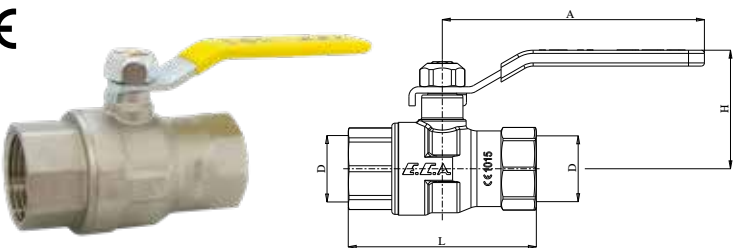

CE

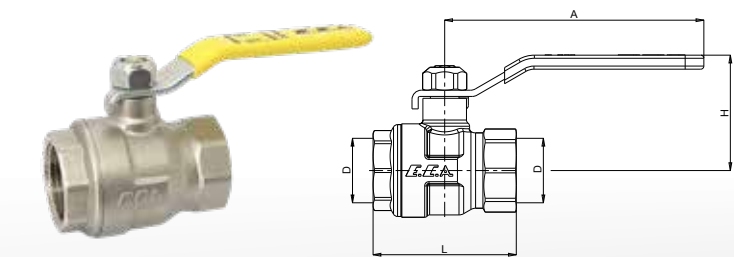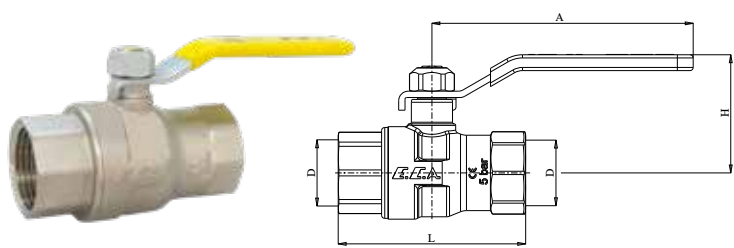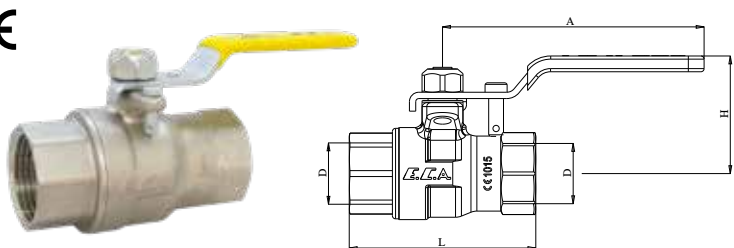


VALVE WITH BUTTERFLY HANDLE

Type 1

Code	D	H	L	Inbox Qty
602122146	1/2"	43,5	59	60
602122147	3/4"	48	68	48
602122148	1"	53	83	30

- Working Temperature: -20°C, +60°C
- Relevant Standard: TS EN 331




NATURAL GAS BALL VALVES WITH BUTTERFLY HANDWHEEL, PN25

Type 2

Code	D1	d	L	A	H	Inbox Qty
602122275	1/2"	Ø 14	46	53,5	45,8	24
602122276	3/4"	Ø 19	54		49,2	12
602122277	1"	Ø 24	66,5	68,5	58,5	15


- Working Pressure: 25 bar
- Working Temperature: -20°C, +60°C



NATURAL GAS BALL VALVES, ANGLE, HOSE END

Code	D	H	H1	Y	d	Inbox Qty
602109068	1/2"	37	35	43,6	Ø11	30


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C



NATURAL GAS BALL VALVES, ANGLE, HOSE END

Code	D	H	L	d	Inbox Qty
602109067	1/2"	35,5	75,5	Ø11	30


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C



NATURAL GAS BALL VALVE, CAL 15

Code	D1	D2	H	B	L	C	SW ₁	SW ₂	SW ₃	Inbox Qty
601017177	PE20	3/4"	65	35	78	70	32	8	14	14


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C
- Relevant Standard: TS EN 331

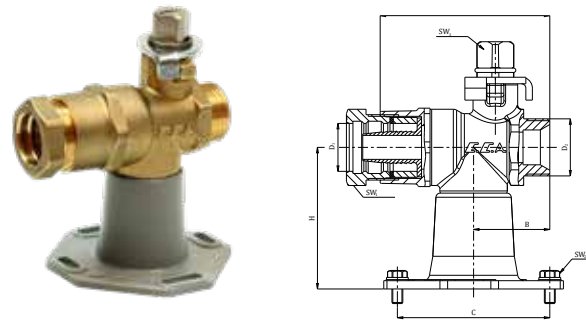

NATURAL GAS BALL VALVE, CAL 15E

Code	D1	D2	H	B	L	C	SW ₁	SW ₂	SW ₃	Inbox Qty
601017178	3/4"	3/4"	65	35	72	70	36	8	14	14


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C
- Relevant Standard: TS EN 331

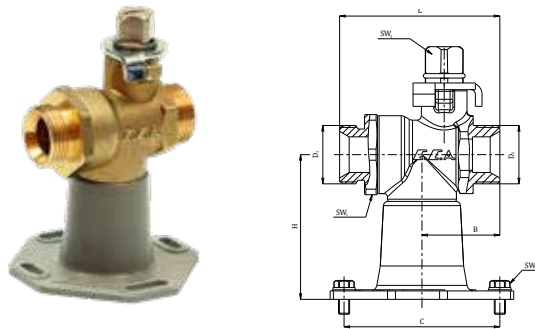

NATURAL GAS BALL VALVE, CAL 25

Code	D1	D2	H	B	L	SW ₁	SW ₂	SW ₃	Inbox Qty
601017179	PE32	1 1/4"	65	55,5	115	50	8	14	8


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C
- Relevant Standard: TS EN 331

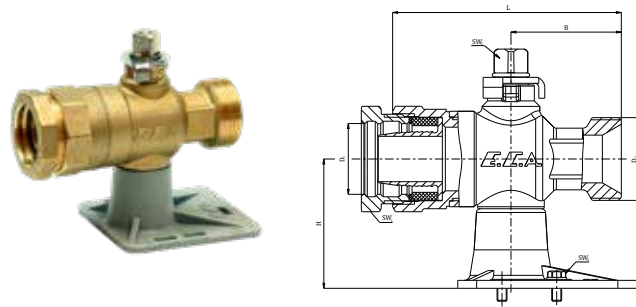

NATURAL GAS BALL VALVE, CAL 25E

Code	D1	D2	H	B	L	SW ₁	SW ₂	SW ₃	Inbox Qty
601017180	1 1/4"	1 1/4"	65	55,5	110	50	8	14	8


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C
- Relevant Standard: TS EN 331

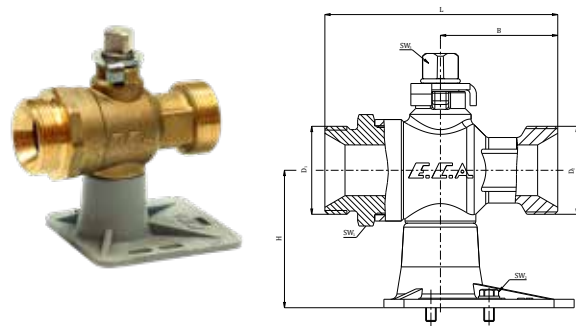

NATURAL GAS BALL VALVE, CAL15/32

Code	D1	D2	H	B	L	C	AA ₁ /SW ₁	AA ₂ /SW ₂	AA ₃ /SW ₃	Inbox Qty
601017433	PE32	3/4"	65	35	83,5	70	50	8	14	12


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C
- Relevant Standard: TS EN 331

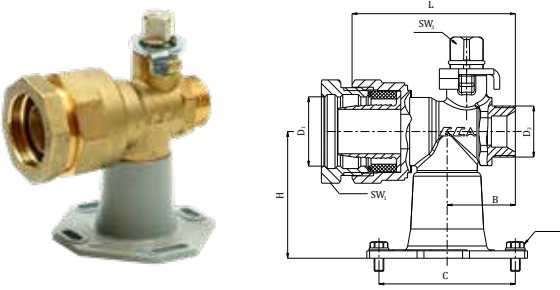

NATURAL GAS BALL VALVE, CAL15/32E

Code	D1	D2	H	B	L	C	AA ₁ /SW ₁	AA ₂ /SW ₂	AA ₃ /SW ₃	Inbox Qty
601017434	1 1/4"	3/4"	65	35	78	70	50	8	14	14


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C
- Relevant Standard: TS EN 331

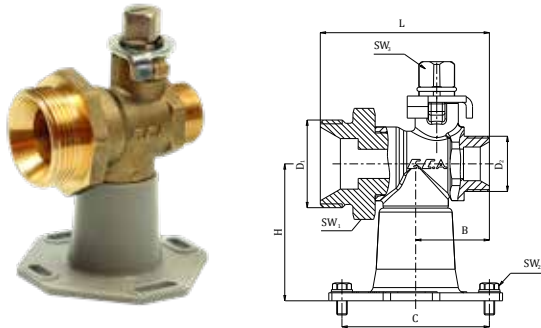

NATURAL GAS BALL VALVE, CAL 15 WITH CHARGING UNIT

Code	D1	D2	H	B	L	C	AA ₁ /SW ₁	AA ₂ /SW ₂	AA ₃ /SW ₃	Inbox Qty
601017370	PE20	3/4"	65	35	81,6	70	32	8	14	14


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C
- Relevant Standard: TS EN 331

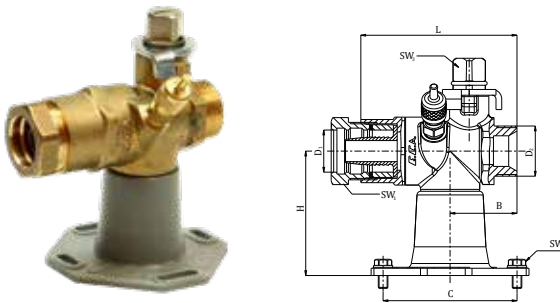

NATURAL GAS BALL VALVE, CAL15/32E WITH CHARGING UNIT

Code	D1	D2	H	B	L	C	AA ₁ /SW ₁	AA ₂ /SW ₂	AA ₃ /SW ₃	Inbox Qty
601017371		3/4"	65	35	75,7	70	36	8	14	12


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C
- Relevant Standard: TS EN 331

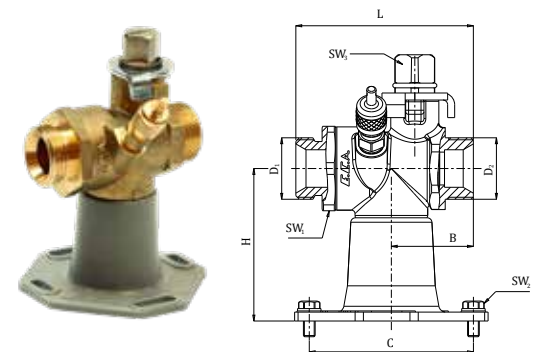

ELBOW FOR S700 SERVICE BOX

Code	D ₁	D ₂	d1	H	L	Inbox Qty
610620150	W 1 11/16" x 1/14"	G 1 1/4"	Ø6	54	54	20
610620159		G 2"		90	54	15


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C

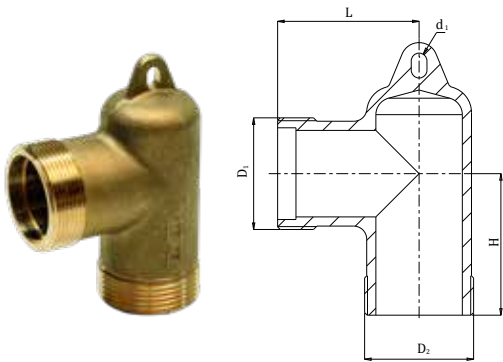

ELBOW FOR S200 SERVICE BOX

Code	D ₁	D ₂	H	L	AA ₁ /SW ₁	AA ₂ /SW ₂	Inbox Qty
602299017	Ø6,5	3/4 "	60	132	32	27	50
602299237				81			40
602299560				45			30


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C

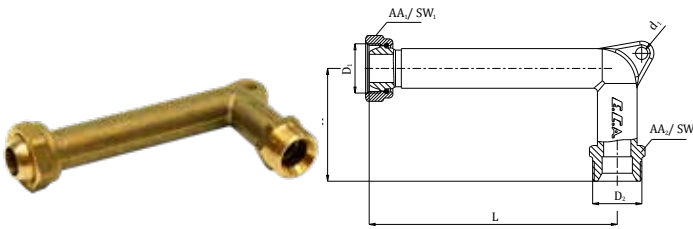

ELBOW FOR CES200 SERVICE BOX

Code	D ₁	D ₂	H	L	SW ₁	SW ₂	Inbox Qty
602299018	3/4"	Ø20	60	45	32	32	20


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C

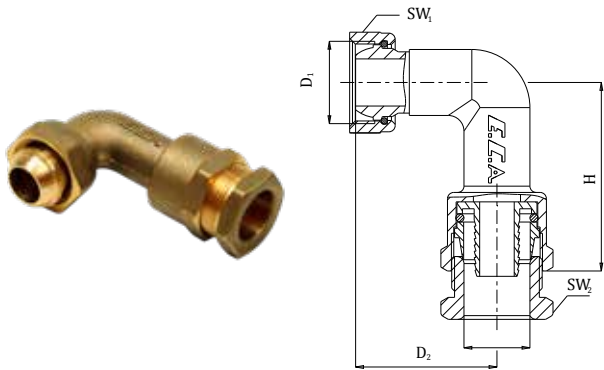

ELBOW FOR CES200 SERVICE BOX

Code	D1	D2	D3	D4	H	L	Inbox Qty
602299368	(Ø) 32 PE	Ø26	M45x2.3	1 1/4"	52	50	20


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C

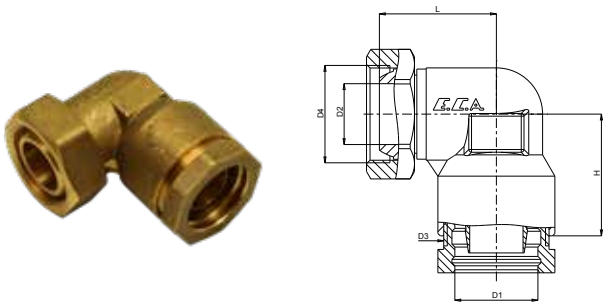

ELBOW FOR SERVICE BOX

Code	D1	D2	d1	d2	H	L	Inbox Qty
602299369	1 1/4"	1"	Ø26	Ø24	40,5	50	20


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C

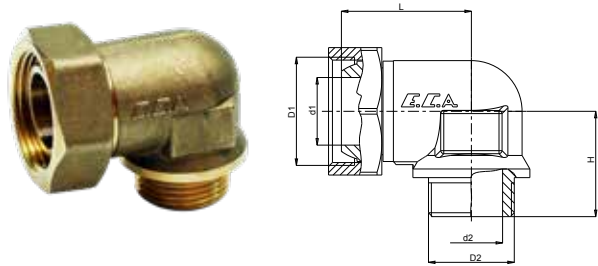

CONNECTION UNION

Code	D ₁	D ₂	L	AA ₁ /SW ₁	AA ₂ /SW ₂	Inbox Qty
602299281	3/4"	1 1/4"	43	32	42	30


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C

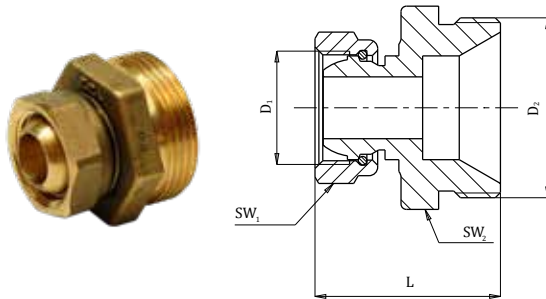

CONNECTION UNION

Code	D ₁	D ₂	L	AA ₁ /SW ₁	AA ₂ /SW ₂	Inbox Qty
602299238	1 1/4"	3/4"	44,5	50	27	30


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C

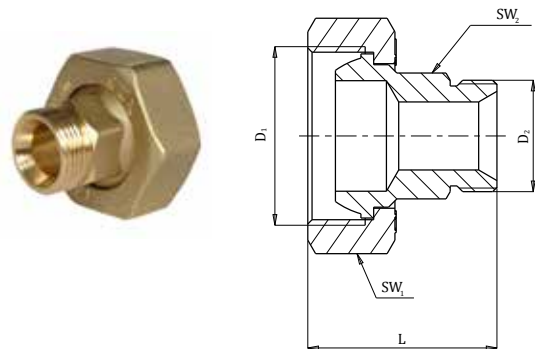

CONNECTION UNION

Code	D ₁	D ₂	L	AA ₁ /SW ₁	AA ₂ /SW ₂	Inbox Qty
602199818	W 1 11/16" x 1/14"	1"	51	50	41	20
602299608	2"	2"	77	70	67	12


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C

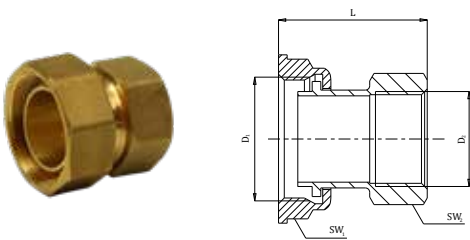

END CAP UNIT FOR CAL 15 TYPE BALL VALVE

Code	D	AA/SW	Inbox Qty
601002015	3/4"	32	100


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C

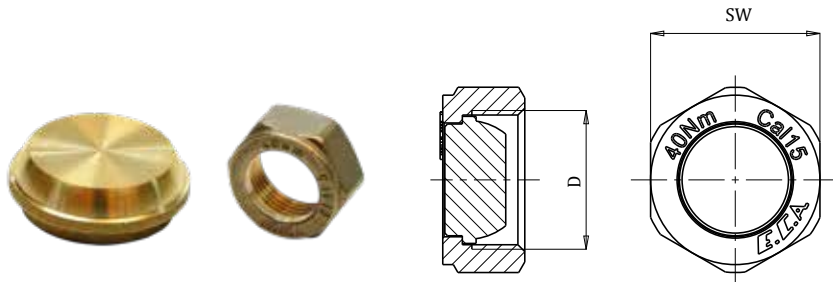

END CAP UNIT FOR CAL 25 TYPE BALL VALVE

Code	D	AA/SW	Inbox Qty
601002016	1 1/4"	50	50


- Working Pressure: 5 bar
- Working Temperature: -20°C, +60°C

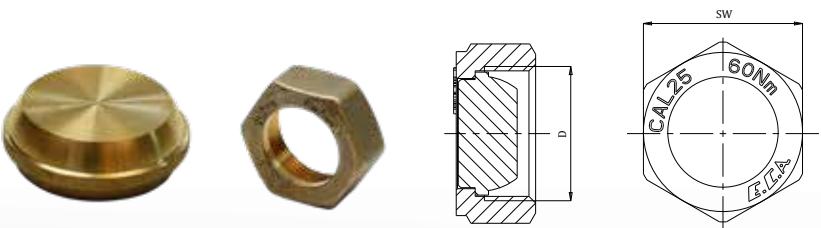

2-WAY MOTORIZED BALL VALVE

Type 1


Code	T	L	H	A	Inbox Qty
602122391	1"	83	127,5	87	24
602122392	1"		119,5	93	24

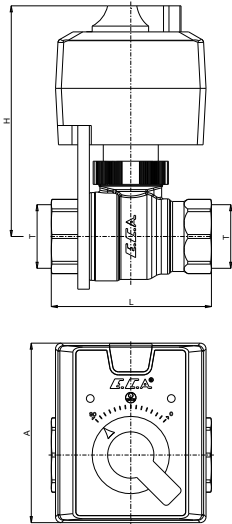

3-WAY MOTORIZED BALL VALVE

Type 1

Code	d	L	L1	H	A	Inbox Qty
602122435	1"	94	47	119,5	78	24

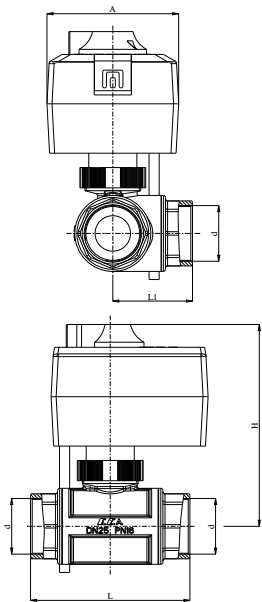

BALL VALVES FOR POTABLE WATER
FEMALE x FEMALE - PN10

Type 1

Code	T	L	H	H1	Inbox Qty
602122168	1/2"	40,4	59,3	96,7	60
602122169	Rp 3/4"	43,5	67,1		48
602122170	Rp 1"	53	83	100	30
602122182	Rp 1 1/4"	64.3	96.1	154.5	16
602122183	Rp 1 1/2"	71.25	109		9
602122184	Rp 2"	81.65	129	185	5

- TS EN 13828
- Operating Temperature Range: From -30°C to +80°C

INDUSTRIAL TYPE BALL VALVES
FEMALE x FEMALE - PN25

Type 1 - RED HANDWHEEL

Code	D	H	L	A	Inbox Qty
602122187	Rp 1/2"	40,35	59,3	96,65	60
602122188	Rp 3/4"	43,6	67,1		48
602122189	Rp 1"	53,3	83	100,3	30
602122202	Rp 1 1/4"	64.3	96.1	154.5	16
602122203	Rp 1 1/2"	71.25	109		9
602122204	Rp 2"	81.65	129	185	5
602122235	G 2 1/2"	112,8	150,6	249,3	2
602122236	G 3"	123,8	165		1

BLUE HANDWHEEL

Code	D	H	L	A	Inbox Qty
602122261	Rp 1/2"	40,35	59,3	96,65	60
602122262	Rp 3/4"	43,6	67,1		48
602122263	Rp 1"	53,3	83	100,3	30
602122293	Rp 1 1/4"	64.3	96.1	154.5	16
602122294	Rp 1 1/2"	71.25	109		9
602122295	Rp 2"	81.65	129	185	5
602122412	G 2 1/2"	112,8	150,6	249,3	2
602122413	G 3"	123,8	165		1




- TS EN 13547
- Operating Temperature Range: From -30°C to +80°C

INDUSTRIAL TYPE BALL VALVES
FEMALE x FEMALE - PN40

Type 1

Code	D	H	L	A	Inbox Qty
602122228	G 1/4"	35,3	44	82,5	24
602122229	G 3/8"	36	46		24
602122230	1/2"	37	50		60
602122231	3/4"	40,5	58		48
602122232	1"	46,5	71	100	30

- TS CEN TS 13547
- Operating Temperature Range: From -30°C to +80°C

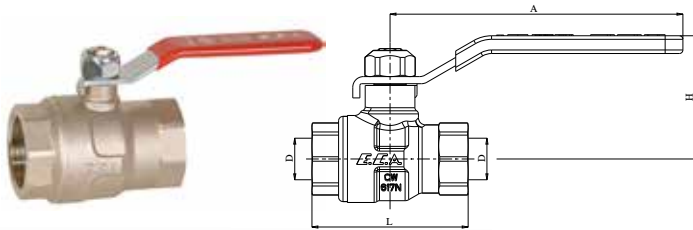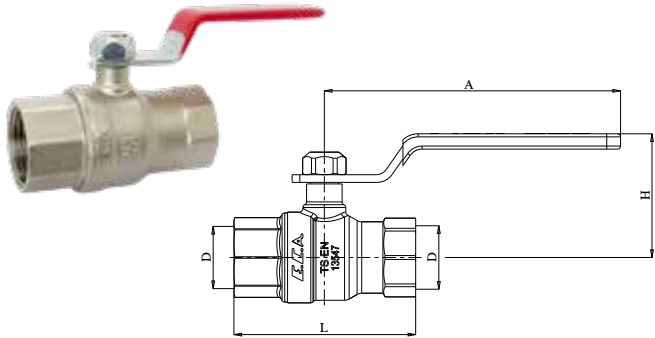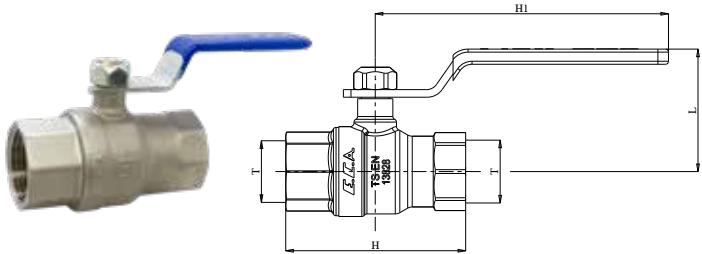

INDUSTRIAL TYPE BALL VALVES
FEMALE x FEMALE - PN25

Type 2 - RED HANDWHEEL

Code	D	L	A	H	Inbox Qty
602122217	1/2"	46	83	37	60
602122218	3/4"	54		40	48
602122219	1"	67	100	47.5	30
602122220	1 1/4"	78,4	154.5	64.3	16
602122221	1 1/2"	90.1		70,25	9
602122222	2"	108	185	80.65	5

BLUE HANDWHEEL

Code	D	L	A	H	Inbox Qty
602122409	1/2"	56.5	83	37	60
602122410	3/4"	66		41	48
602122411	1"	76.4	100	47.5	30
602122322	1 1/4"	78,4	154.5	64.3	16
602122323	1 1/2"	90.1		70,25	9
602122324	2"	108	185	80.65	5

- Operating Temperature Range: From -30°C to +80°C

INDUSTRIAL TYPE BALL VALVES
FEMALE & MALE - PN25

Type 1




Code	D	H	L	A	Inbox Qty
602122237	1/2"	40,3	68,8	96,6	40
602122238	3/4"	41,2	77,5	83	30
602122239	1"	47,5	93	100	20
602122240	R 1 1/4"	64,3	109,1	154,5	12
602122241	R 1 1/2"	71,2	121,8		6
602122242	R 2"	81,6	151	185	4

- TS CEN TS 13547
- Operating Temperature Range: From -30°C to +80°C

INDUSTRIAL TYPE BALL VALVES
FEMALE & FEMALE - PN25

Type 3

Code	D	L	A	H	Inbox Qty
602122397	1/2"	47	97	37	60
602122398	3/4"	51	97	40	48
602122399	1"	59,8	96,7	43,6	30
602122439	1 1/4"	72,1	100	53	16
602122440	1 1/2"	81	154,5	64,25	9
602122441	2"	103,1	154,5	71,25	5
602122442	2 1/2"	118,3	185	81,65	2
602122443	3"	149	249,3	113,75	1

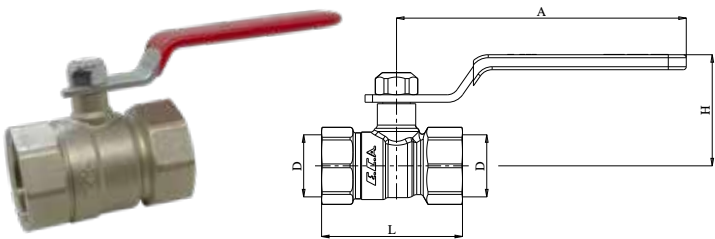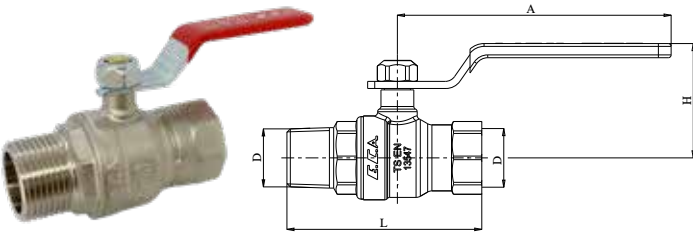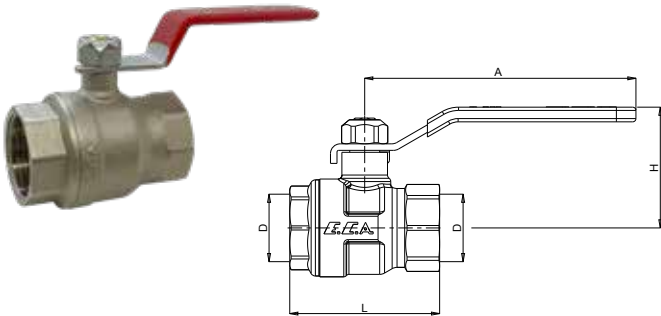

INDUSTRIAL TYPE BALL VALVES, FEMALE x MALE - PN25

Type 2 - RED HANDWHEEL

Code	D	L	A	H	Inbox Qty
602122278	1/2"	56.5	83	37	40
602122279	3/4"	66	83	41	30
602122280	1"	76.4	100	47.5	20

BLUE HANDWHEEL

Code	D	L	A	H	Inbox Qty
602122309	1/2"	56.5	83	37	24
602122310	3/4"	66	83	41	30
602122311	1"	76.4	100	47.5	15

- Operating Temperature Range: From -30°C to +80°C

INDUSTRIAL TYPE BALL VALVES, FEMALE x MALE - PN25

Type 1 - RED HANDWHEEL

Code	D	H	L	A	D	Inbox Qty
602122243	Rp 1/2"	46,5	68,8	53,5	Rp 1/2"	40
602122245	Rp 3/4"	48,7	77,5		Rp 3/4"	30
602122247	Rp 1"	53	93	68,5	Rp 1"	20

BLUE HANDWHEEL

Code	D	H	L	A	D	Inbox Qty
602122244	Rp 1/2"	46,5	68,8	53,5	Rp 1/2"	40
602122246	Rp 3/4"	48,7	77,5		Rp 3/4"	30
602122248	Rp 1"	53	93	68,5	Rp 1"	20

- Max. Operating Temperature: +80°C
- Max. Operating Pressure: 25 bar
- TS EN 13547

INDUSTRIAL TYPE BALL VALVES, FEMALE x FEMALE - PN25




Type 1 - RED HANDWHEEL

Code	D	H	L	A	Inbox Qty
602122249	Rp 1/2"	46,5	59,3	53,5	60
602122251	Rp 3/4"	49,7	67,1		48
602122253	Rp 1"	58,5	83	68,5	30

BLUE HANDWHEEL

Code	D	H	L	A	Inbox Qty
602122250	Rp 1/2"	46,5	59,3	53,5	60
602122252	Rp 3/4"	49,7	67,1		48
602122254	Rp 1"	58,5	83	68,5	30

- Max. Operating Temperature: +80°C
- Max. Operating Pressure: 25 bar
- TS EN 13547

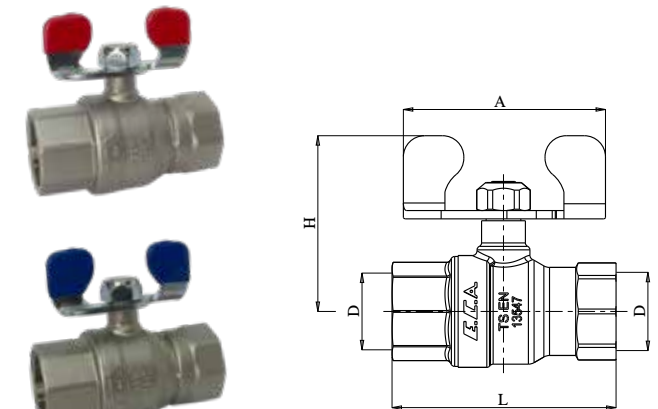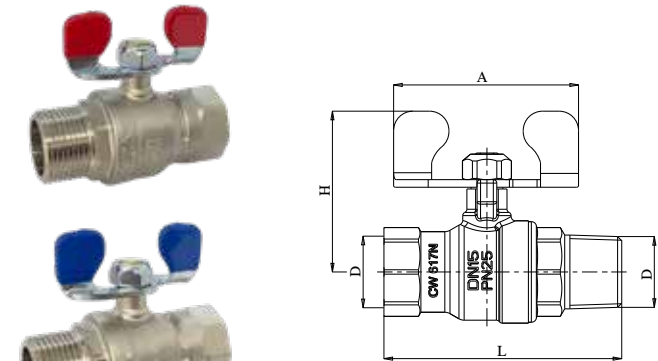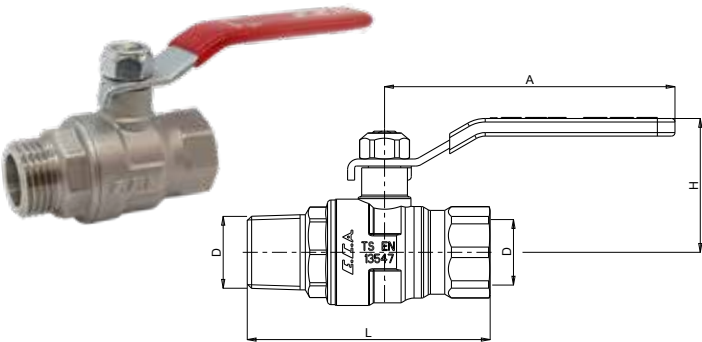

INDUSTRIAL TYPE BALL VALVES, FEMALE x FEMALE - PN25

Type 2 - RED HANDWHEEL

Code	D1	d	L	A	H	Inbox Qty
602122420	1/2"	Ø14	46	53,5	45,8	40
602122421	3/4"	Ø19	54		49,2	30
602122422	1"	Ø24	66,5	68,5	58,5	20

BLUE HANDWHEEL

Code	D1	d	L	A	H	Inbox Qty
602122417	1/2"	Ø14	46	53,5	45,8	40
602122418	3/4"	Ø19	54		49,2	30
602122419	1"	Ø24	66,5	68,5	58,5	20

- Operating Temperature Range: From -30°C to +80°C

BALL VALVE, W/UNION, W

Type 2 - NICKEL PLATED, RED HANDLE

Code	D	L	H	Inbox Qty
602122359	1/2"	76,5	46,5	40
602122363	3/4"	90,8	49,7	30
102122205	1"	89	53	20
602122180	1 1/4"	125	58,5	12

WITHOUT NICKEL PLATED, RED HANDLE

Code	D	L	A	H	Inbox Qty
601027412	1"	77,5	60	48,7	20

- Max. Operating Temperature: +80°C
- Max. Operating Pressure: 25 bar

BALL VALVE, W/UNION, W, RED BUTTERFLY HANDWHEEL




Type 2 - NICKEL PLATED, BLUE HANDLE

Code	D	H	L	A	Inbox Qty
602122360	1/2"	46,5	46,5	53,5	40
602122364	3/4"	49,7	49,7		30
102122347	1"	53	53	68,5	20
602122181	1 1/4"	58,5	58,5	82,5,5	12

WITHOUT NICKEL PLATED, BLUE HANDLE

Code	D	H	L	A	Inbox Qty
601027413	1"	53	89	60	20

- Max. Operating Temperature: +80°C
- Max. Operating Pressure: 25 bar

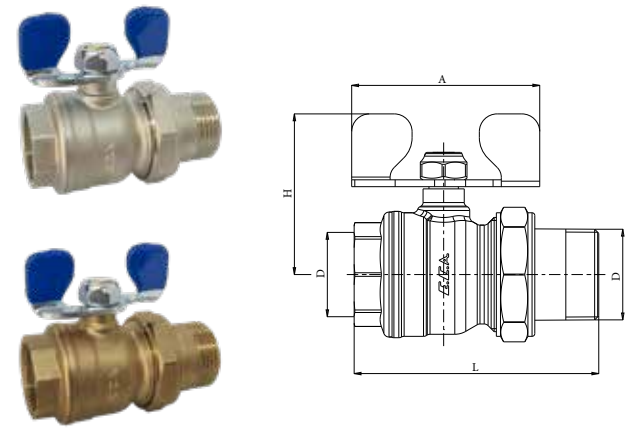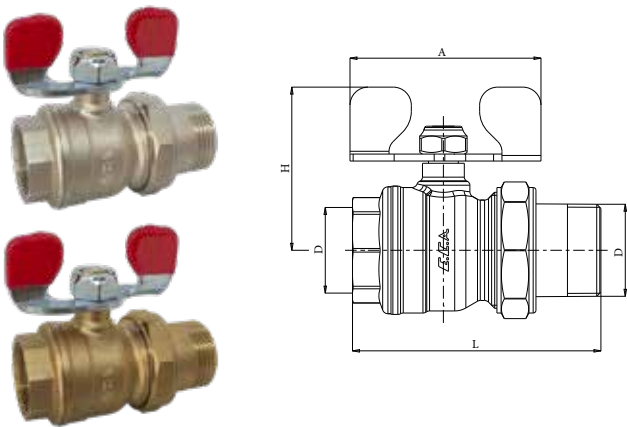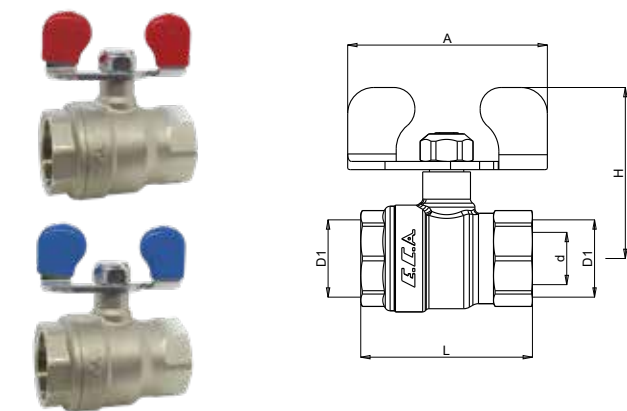

INDUSTRIAL TYPE BALL VALVES

Type 3 - FEMALE x FEMALE - PN25

Code	D	H	L	A	Inbox Qty
602122403	1/2"	35,3	47	53,5	40
602122404	3/4"	46,5	51		30
602122405	1"	49,7	60		20

MINI BALL VALVE, FEMALE x MALE

Code	Color	D	H	L	Inbox Qty
102122027	Red	3/8"	30	40	150
102122028	Red	1/2"	31,3	46,3	150
102122029	Red	3/4"	38	50	75

Code	Color	D	H	L	Inbox Qty
602122003	Blue	1/2"	30	40	150

MINI BALL VALVE (SELF-FIXED HOSE END) Female

Code	Color	D	H	L	d	Inbox Qty
102122031	Red	1/2"	32	45,7	Ø16x2	30
102122348	Blue	1/2"	32	45,7	Ø16x2	30





DRAIN MINI BALL VALVE WITH HOSE END

Code	Color	D	H	L	d	Inbox Qty
602122009	Red	1/2"	32	73,3	Ø14,5	24
602122001	Blue					

- TSEK
- PN10
- Operating Temperature Range: From -30°C to +80°C
- Plastic, T and L Type Handwheel

Code	Color	D	H	L	d	Inbox Qty
102122379	Red	1/2"	29,8	68	Ø14,5	30
102122380	Blue					

- TSEK
- PN10
- Operating Temperature Range: From -30°C to +80°C
- Plastic, T and L Type Handwheel

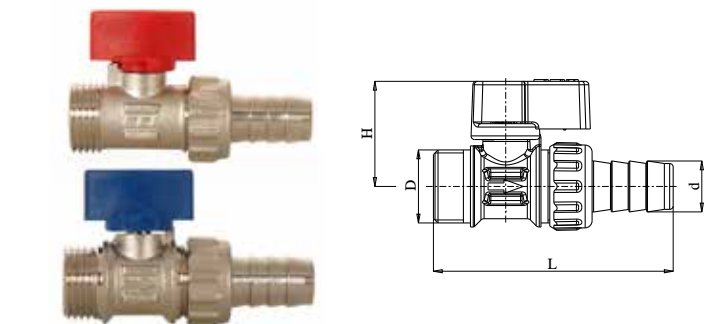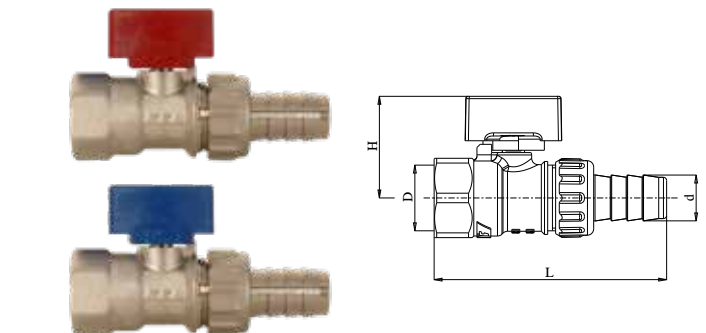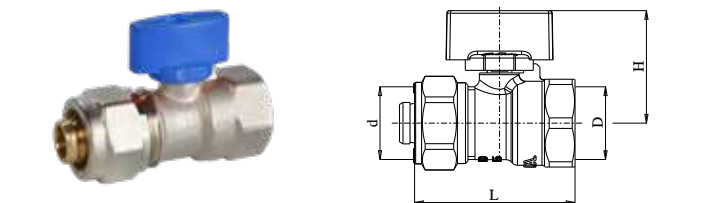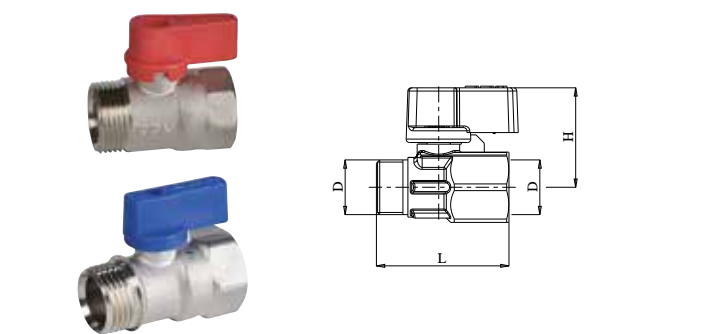

GATE VALVE

Type 1

Code	D	H	L	D1	Inbox Qty
601003019	1/2"	85	55,5	49	30
601003020	3/4"	96	58	58,2	20
601003021	1"	103	68		
601003022	G 1 1/4"	109	78	68,4	12
601003023	G 1 1/2"	119	80,5		
601003024	G 2"	148	93	81	8

- TS EN 12288
- Plastic Handwheel
- PN 25
- Max. Operating Temperature 90°C

GATE VALVE

Type 2

Code	D	H	L	D1	Inbox Qty
601003001	1/2"	74,7	38	50	30
601003002	3/4"	85,7	43	60	20
601003003	1"	94,6	47,6		
601003004	G 1 1/4"	117	58	70	12
601003005	G 1 1/2"	129	62		
601003006	G 2"	141	68	80	9
601003015	G 2 1/2"	180,5	78	110	4
601003016	G 3"	210	90		2
601003017	G 4"	221	102	130	1




- Plastic Handwheel
- PN 16
- Max. Operating Temperature 90°C

STOP VALVE

Type 1

Code	D	H	L	D1	Inbox Qty
601005031	Rp 1/2"	84,5	58	49	60
601005032	Rp 3/4"	94	65,2	58,2	35
601005033	Rp 1"	104	77	58	20
601005034	Rp 1 1/4"	125	94	68.4	10
601005035	Rp 1 1/2"	130.7	100	81	8
601005036	Rp 2"	148.7	123		6

- TS 15 EN1213
- Plastic Handwheel
- PN 10
- Max. Operating Temperature 80°C

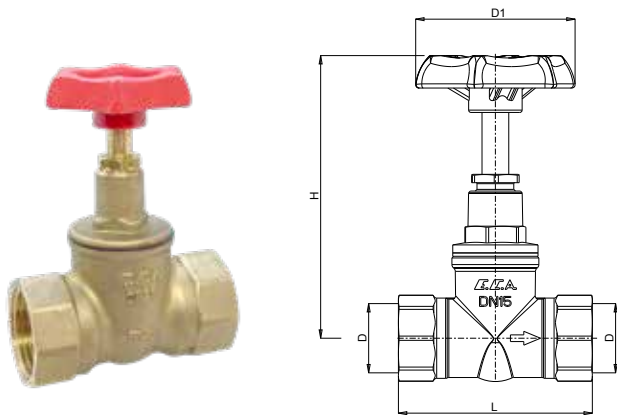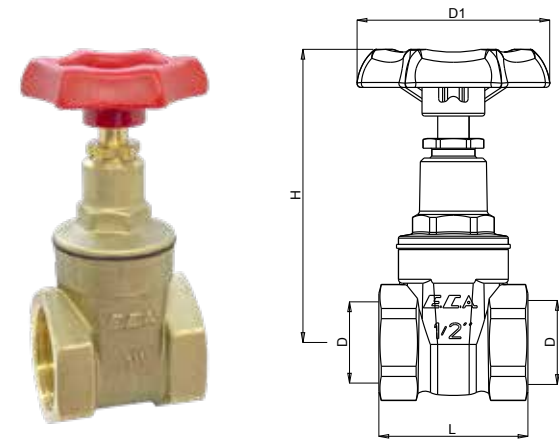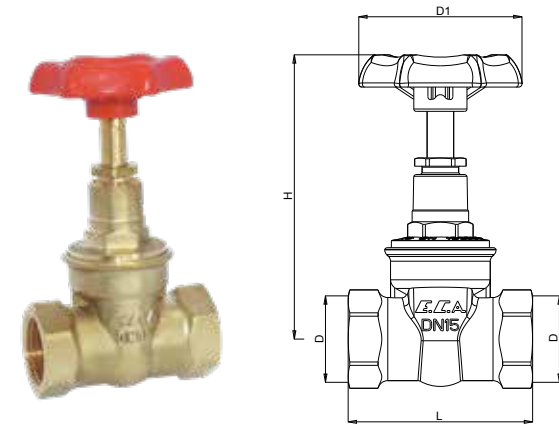


STOP VALVE WITH DRAIN TAP

Type 2

Code	D	H	L	D1	Inbox Qty
601005040	Rp 1/2"	84	58	49	40
601005041	Rp 3/4"	94	65,2	58,2	25
601005042	Rp 1"	104,5	78,6		15

- Special Handwheel
- There is a plastic Drain tap which can be attached both side, coupled on valves
- PN 10
- Max. Operating Temperature 80°C

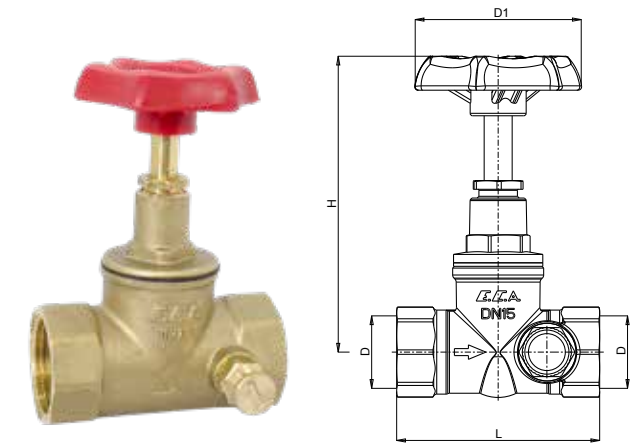


STOP VALVE WITH DRAIN TAP

Type 2

Code	D	H	L	D1	Inbox Qty
601004001	1/2"	90	57	49	40
601004002	3/4"	100	67	58,2	25
601004003	1"	118	78		15
601004004	G 1 1/4"	135	92	68,4	12
601004005	G 1 1/2"	153,7	102		8
601004006	G 2"	177,5	122	81	5


- Special Handwheel
- There is a plastic Drain tap which can be attached both side, coupled on valves
- PN 10
- Max. Operating Temperature 80°C

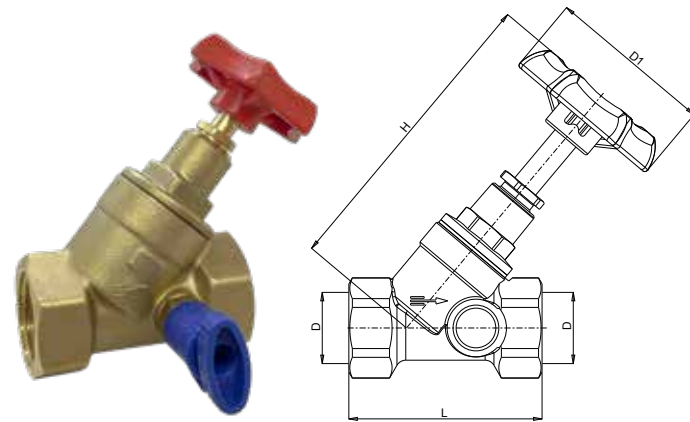

FILTER (Strainer)

Code	D	L	Inbox Qty
601010001	1/2"	57	40
601010002	3/4"	69	25
601010003	1"	86,7	14
601010004	G 1 1/4"	92	8
601010005	G 1 1/2"	98	5
601010006	G 2"	120	3


- TSEK
- Operating Pressure: 25 bar
- Operating Temperature Range: From -30°C to +80°C A
- Special Stainless Steel Filter (140 hole/cm²)

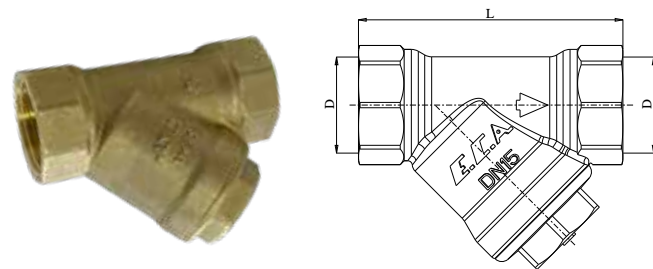

SWING CHECK VALVES

Code	D	L	H	Inbox Qty
101007092	1/2"	46,5	31,5	40
101007093	3/4"	56,5	34,5	20
101007094	1"	63	39	14


- TS EN 1074-3
- Special design, flap with rubber gasket
- Operating Pressure: 25 bar
- Max. Operating Temperature 80°C

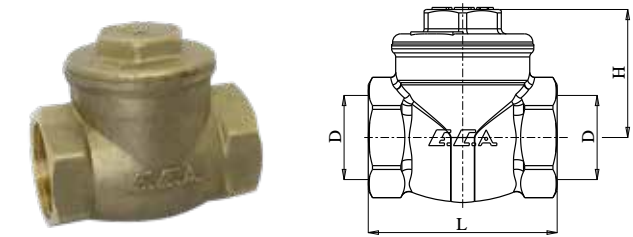

HORIZONTAL CHECK VALVE

Code	D	L	H	Inbox Qty
601007022	1/2"	55	32,5	35
601007023	3/4"	60	37,5	14
601007024	1"	73	43,5	14
601007025	G 1 1/4"	86	54	6
601007026	G 1 1/2"	98	61,5	10
601007027	G 2"	116	66	5


- TS EN 1074-3
- The horizontal check valves must be fixed absolutely horizontally
- Operating Pressure: 25 bar
- Max. Operating Temperature 80°C

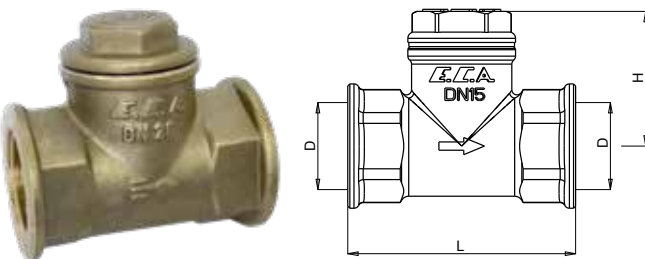

SPRING TYPE CHECK VALVE

Code	D	H	Inbox Qty
601007007	1/2"	39,2	20
601007008	3/4"	49,7	15
601007009	1"	62,5	10
601007010	G 1 1/4"	67	6
601007011	G 1 1/2"	77	4
601007012	G 2"	86,5	3

- Special Handwheel
- There is a plastic Drain tap which can be attached both side, coupled on valves
- PN 10
- Max. Operating Temperature 80°C

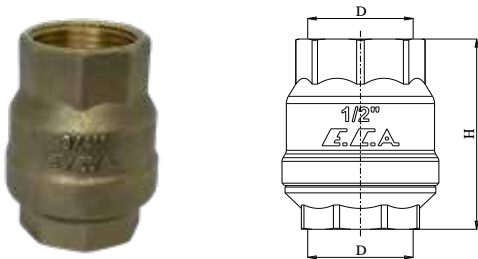


FLOATER

Code	D	L	Inbox Qty
101009001	3/8"	119	20
101009002	1/2"		
101009003	3/4"	128	10
101009004	1"		

101009005	1 1/4"	128,5	4
101009006	1 1/2"		
101009007	2"		

- TS EN 1074-3
- Special design, flap with rubber gasket
- Operating Pressure: 25 bar
- Max. Operating Temperature 80°C

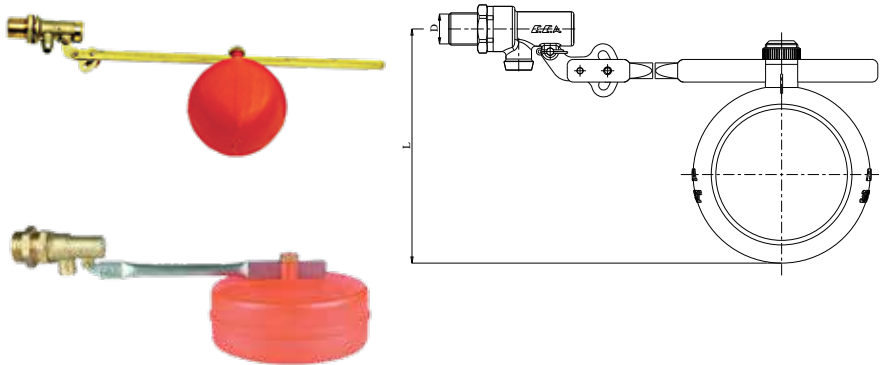


FLOATER

Type 2

Code	D	L	Inbox Qty
601009015	1/2"	140	10
601009016	3/4"		
601009017	1"		


- Special design, flap with rubber gasket
- Operating Pressure: 25 bar
- Max. Operating Temperature 80°C

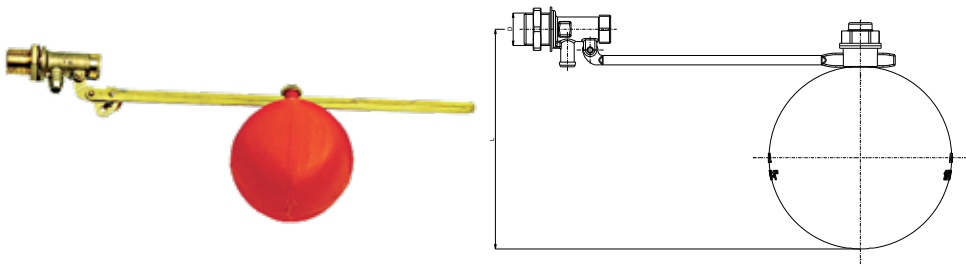

WATER PRESSURE REDUCING VALVE WITH UNION, FEMALE

Code	L	L1	H	T	Inbox Qty
602111007	68	48	87,1	1/2"	10
102199160			98	3/4"	10


- TS EN 1567
 - Operating pressure: 16 bar
 - Outlet Make pressure: 1~5 bar
 - Factory defaults: 8 bar inlet - 3 bar outlet
- Equalize inlet and outlet pressure, if another pressure level need
 - Max. Operating Temperature 80°C

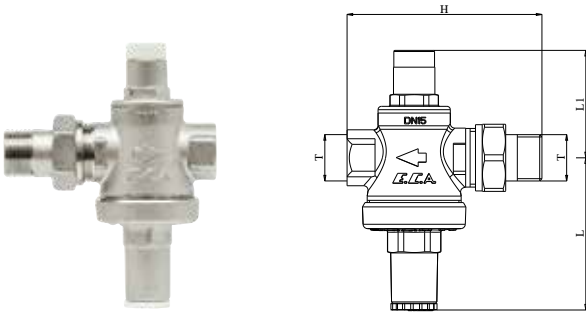

WATER PRESSURE REDUCING VALVE WITH MANOMETER, WITH UNION, FEMALE

Code	L	L1	H	T	Inbox Qty
602111006	68	100	87,1	1/2"	6
602111008	68	105	98	3/4"	6


- TS EN 1567
 - Operating pressure: 16 bar
 - Outlet Make pressure: 1~5 bar
 - Factory defaults: 8 bar inlet - 3 bar outlet
- Equalize inlet and outlet pressure, if another pressure level need
 - Max. Operating Temperature 80°C

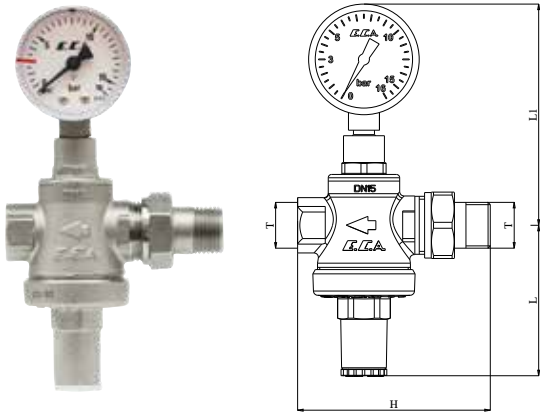

WATER PRESSURE REDUCING VALVE WITHOUT MANOMETER, WITHOUT UNION, FEMALE x FEMALE

Code	D	H	H1	L	Inbox Qty
602111004	1/2"	68	48	60	10
602111009	3/4"			60	10
602111038	Rp 1"	97,7	59	81	8
602111037	Rp 1 1/4"			88	4


- TS EN 1567
 - Operating pressure: 16 bar
 - Outlet Make pressure: 1~5 bar
 - Factory defaults: 8 bar inlet - 3 bar outlet
- Equalize inlet and outlet pressure, if another pressure level need
 - Max. Operating Temperature 80°C

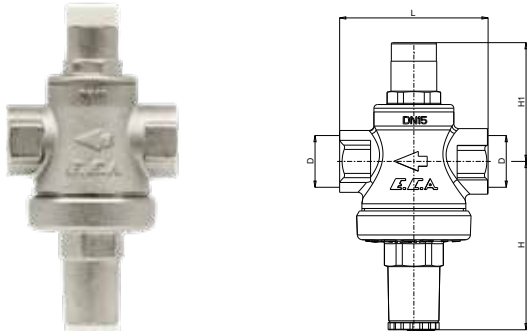

WATER PRESSURE REDUCING VALVE WITH MANOMETER, WITHOUT UNION, FEMALE x FEMALE

Code	D	L	H	H1	Inbox Qty
602111005	1/2"	60	68	97,5	6
602111010	3/4"			100	6
602111042	1"	81	97,7	110,7	8
602111041	1 1/4"	88		111	4

- TS EN 1567
 - Operating pressure: 16 bar
 - Outlet Make pressure: 1~5 bar
 - Factory defaults: 8 bar inlet - 3 bar outlet
- Equalize inlet and outlet pressure, if another pressure level need
 - Max. Operating Temperature 80°C

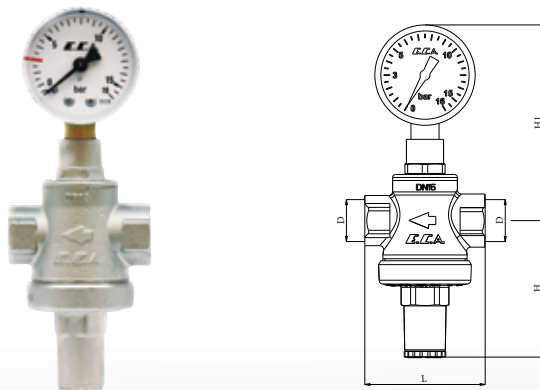

WATER PRESSURE REDUCING VALVE WITH ADJUSTEMENT HANDWHEEL, FEMALE x FEMALE


Code	D	L	H	A	Inbox Qty
602111099	87,6	48	60	1/2"	10
602111096			63,6	3/4"	



WATER PRESSURE REDUCING VALVE WITH ADJUSTEMENT HANDWHEEL, WITH UNION FEMALE

Code	D	L	H	A	Inbox Qty
602111109	87,6	48	87,1	1/2"	6
602111110			98	3/4"	


- TS EN 1567
 - Operating pressure: 16 bar
 - Outlet Make pressure: 1~5 bar
 - Factory defaults: 8 bar inlet - 3 bar outlet
- Equalize inlet and outlet pressure, if another pressure level need
 - Max. Operating Temperature 80°C

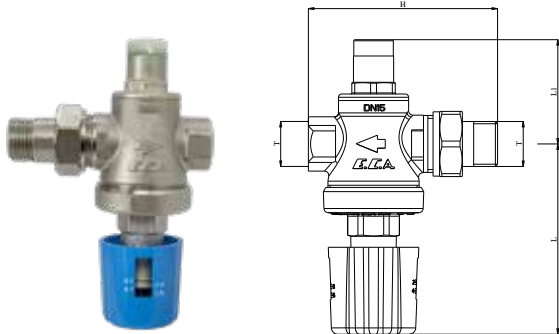

WATER PRESSURE REDUCING VALVE, FEMALE x FEMALE

Code	D	H	H1	L	Inbox Qty
602111018	2"	75,5	151	126	1


- TS EN 1567
 - Operating pressure: 16 bar
 - Outlet Make pressure: 1~5 bar
 - Factory defaults: 8 bar inlet - 3 bar outlet
- Equalize inlet and outlet pressure, if another pressure level need
 - Max. Operating Temperature 80°C

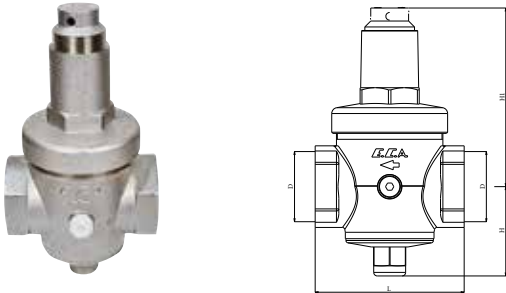

WATER PRESSURE REDUCING VALVE WITH MANOMETER, FEMALE x FEMALE

Code	D	H	H1	L	Inbox Qty
602111019	2"	75,5	151	126	1

- TS EN 1567
 - Operating pressure: 16 bar
 - Outlet Make pressure: 1~5 bar
 - Factory defaults: 8 bar inlet - 3 bar outlet
- Equalize inlet and outlet pressure, if another pressure level need
 - Max. Operating Temperature 80°C

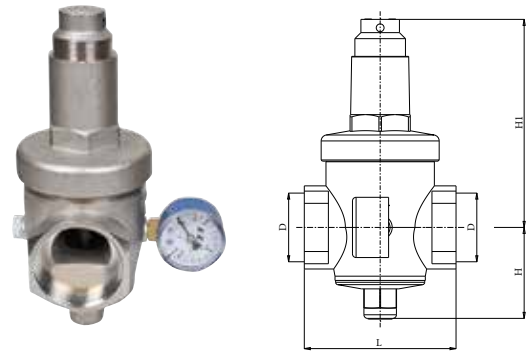

ANGLE BALL VALVE WITH FILTER

Code	D	D1	D2	H	H1	L	L1	Inbox Qty
602111048	1/2"	G 3/8"	Ø54	23	30,3	60	30	30

- TSEK
- Nickel Plated
- Special Plastic L Handwheel
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

ANGLE BALL VALVE WITH FILTER

(Screwdriver Slotted End Cap)

Code	D	D1	D2	H	H1	L	L1	Inbox Qty
602111156	1/2"	G 3/8"	Ø54	23	30,3	59	30	30

- TSEK
- Nickel Plated
- Special Plastic L Handwheel
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

ANGLE BALL VALVE WITH FILTER

Code	D	D1	D2	H	H1	L	L1	Inbox Qty
602111043	1/2"	G 3/8"	Ø54	23	30,3	60	30	30

- TSEK
- Nickel Plated
- Special Plastic L Handwheel
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

ANGLE BALL VALVE WITH FILTER






Code	D	D1	D2	H	H1	L	L1	Inbox Qty
602111052	1/2"	1/2"	Ø54	25	30,3	60	30	30

- TSEK
- Nickel Plated
- Special Plastic L Handwheel
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

ANGLE BALL VALVE WITH FILTER

Code	D	D1	D2	H	H1	L	L1	Inbox Qty
102111018	1/2"	G 3/8"	Ø54	23	30,7	74	37	30

- TSEK
- Polished Chrome Plated
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

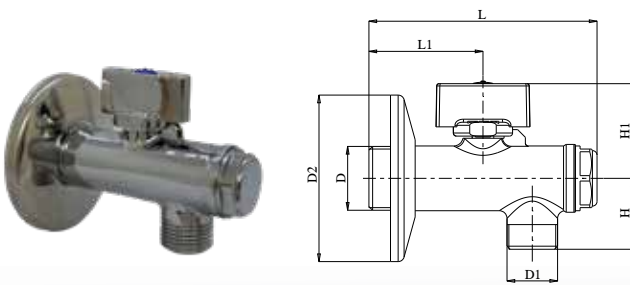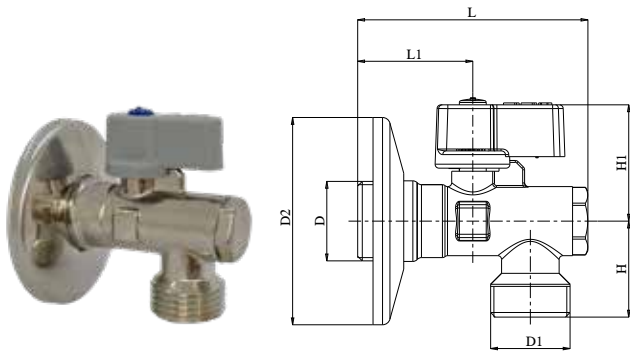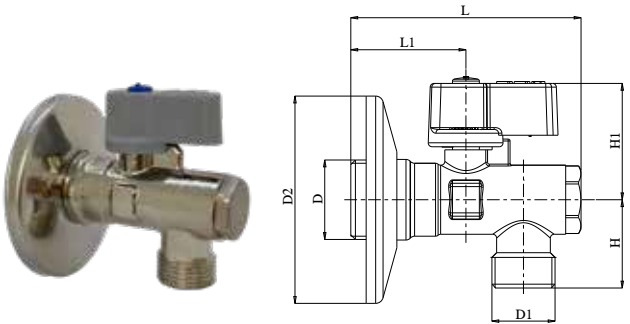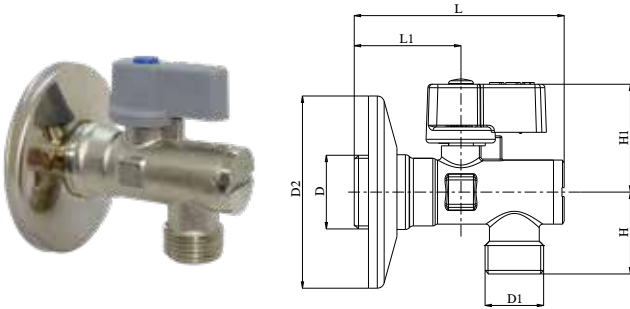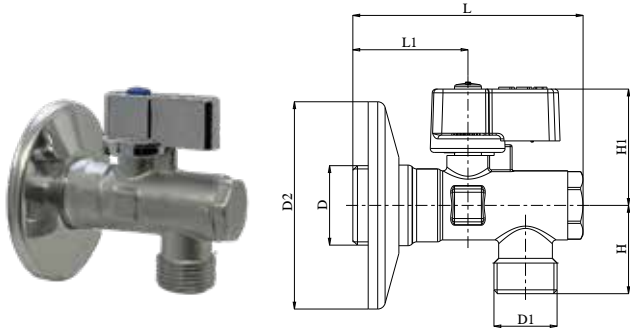

ANGLE BALL VALVE WITH FILTER

Code	D	D1	D2	H	H1	L	L1	Inbox Qty
602111059	1/2"	3/4"	Ø54	25	30,3	60	30	30

- TSEK
- Nickel Plated
- Special Plastic L Chrome Handwheel
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

ANGLE BALL VALVE

Code	D	D1	D2	H	H1	L	L1	Inbox Qty
102122041	1/2"	3/4"	Ø54	29,5	33,7	64	49	25

- TSEK
- Polished Chrome Plated
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

ANGLE BALL VALVE





Code	D	D1	D2	H	L	L1	Inbox Qty
602111066	1/2"	1/2"	Ø54	36,1	41	31,8	25

- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

ANGLE BALL VALVE

Code	D	D1	D2	H	L	L1	Inbox Qty
602111067	1/2"	3/4"	Ø54	33,1	41	31,8	25


- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

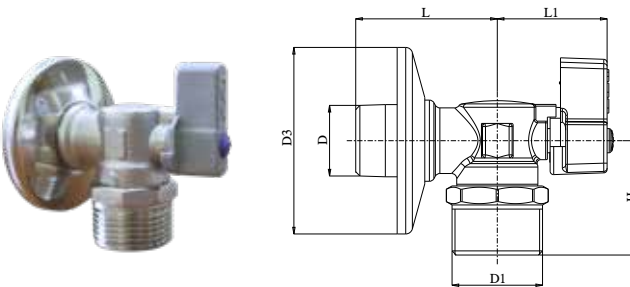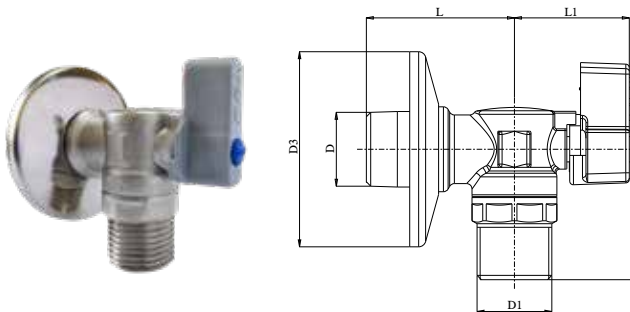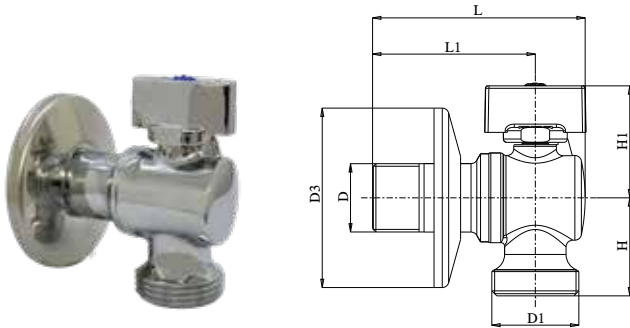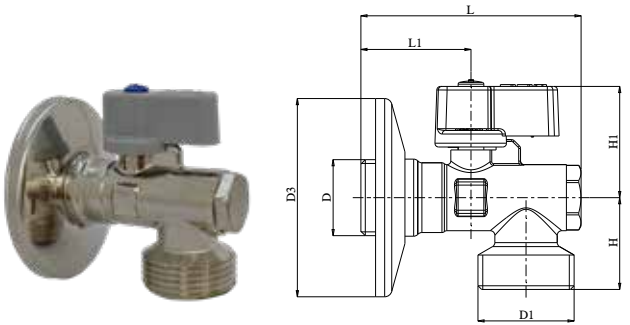

ANGLE BALL VALVE WITH HOSE END

Code	D	d	H	H1	L	Inbox Qty
602109042	1/2"	Ø11,8	37	32	44	30


- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C

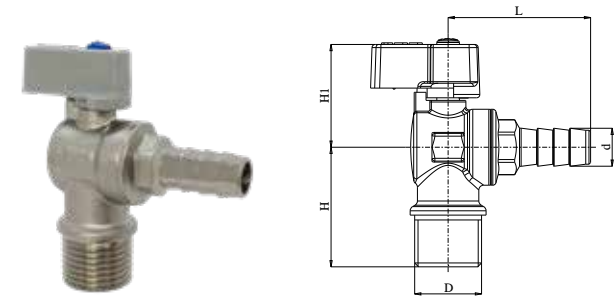

MINI BALL VALVE, HOSE END

Code	D	d	H	L	Inbox Qty
602109043	1/2"	Ø11,8	33	76	30

- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C

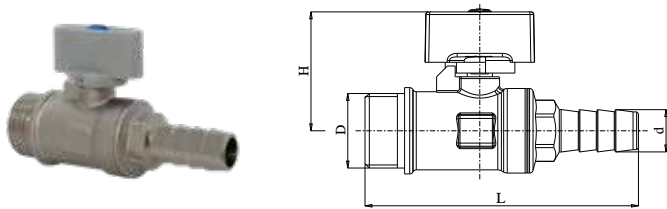


MULTI-TURN ANGLE VALVE

Code	D1	D2	H	L1	L	Inbox Qty
601012036	1/2"	1/2"	26	43	86.5	80

Code	D1	D2	H	L1	L	Inbox Qty
601012040	1/2"	3/4"	26	43	86.5	80

Code	D1	D2	H	L1	L	Inbox Qty
601012039	1/2"	3/8"	26	43	86.5	80

- Chrome Plated
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C

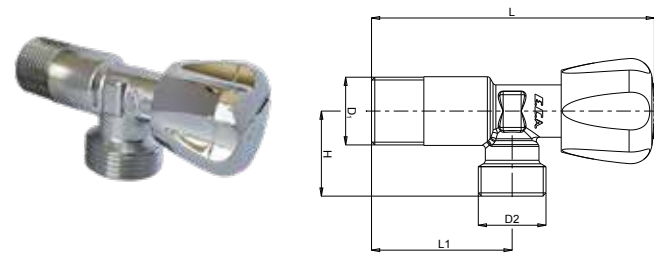


MULTI-TURN ANGLE VALVE

Code	D1	D2	H	L1	L	Inbox Qty
601012045	1/2"	1/2"	26	43	86.5	30

Code	D1	D2	H	L1	L	Inbox Qty
601012038	1/2"	3/4"	26	43	86.5	30

- Chrome Plated
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

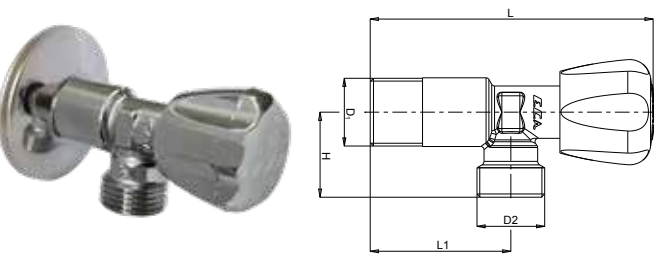


MULTI-TURN ANGLE VALVE, WITH CLIP

Type 1 - For Concealed Cistern

Code	D	D1	L	H1	H	Inbox Qty
602109030	1/2"	3/8"	22	50	85.5	80

- Clip connection
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- NF Certificated

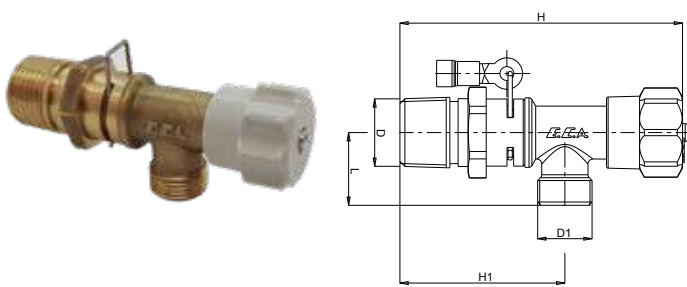


MULTI-TURN ANGLE VALVE

Type 1 - For Concealed Cistern

Code	D	D1	L	H1	H	Inbox Qty
602109031	1/2"	3/8"	22	29,2	64,6	125

- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- NF Certificated

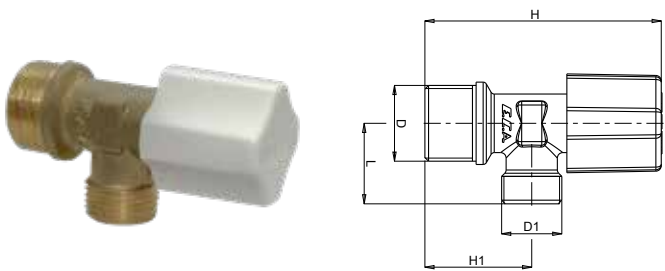


MULTI-TURN ANGLE VALVE

Type 2 - For Concealed Cistern

Code	D	D1	L	H1	H	Inbox Qty
602109029	1/2"	3/8"	22	29,2	64,6	125

- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- NF Certificated

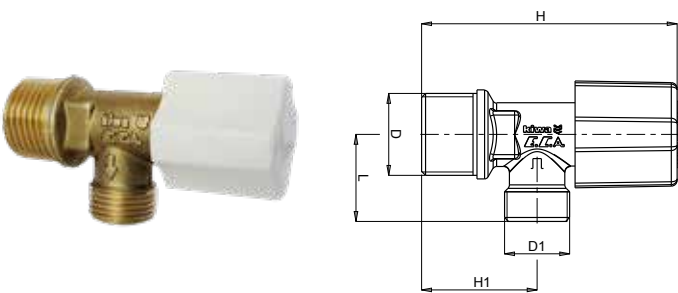


MULTI-TURN ANGLE VALVE

Type 1 - For Concealed Cistern

Code	D	D1	L	H1	H	Inbox Qty
602109069	1/2"	3/8"	21	24	54	150

- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C

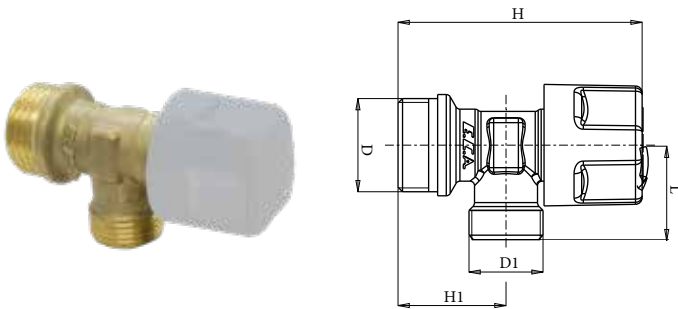


MULTI-TURN ANGLE VALVE - CHROMED

Type 2

Code	D	D1	L	H1	H	Inbox Qty
601012031	1/2"	3/8"	22	29,2	64,6	125

- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C

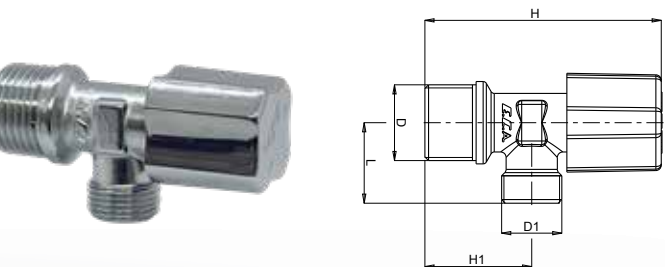




PLUMBING SYSTEMS VALVES

BIBCOCK, BALL TYPE, BUTTERFLY HANDWHEEL

Code	D	d	H	L	Inbox Qty
102109045	1/2"	Ø13	36,1	72,8	24
102109046	3/4"	Ø18	37	77,2	15


- TSEK
- Nickel Plated
- Special Plastic T Handwheel
- Hose end with union
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Brass hose end

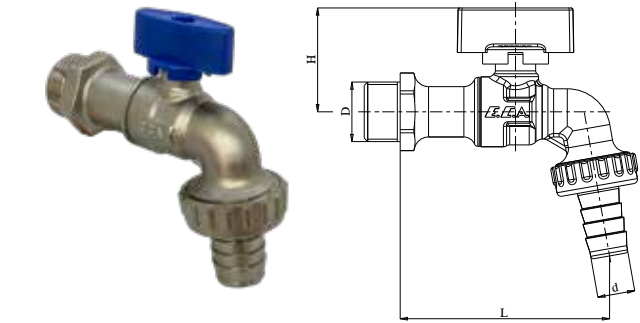

BIBCOCK, BALL TYPE

Code	D	D2	H	H1	L	L1	Inbox Qty
602109004	1/2"	Ø13	84,5	34,6	135,1	72,8	30
602109005	3/4"	Ø18	87,4	34,6	135,1	72,8	30


- TSEK
- Nickel Plated
- Handwheel with 90° turn
- Hose end with union
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Brass hose end

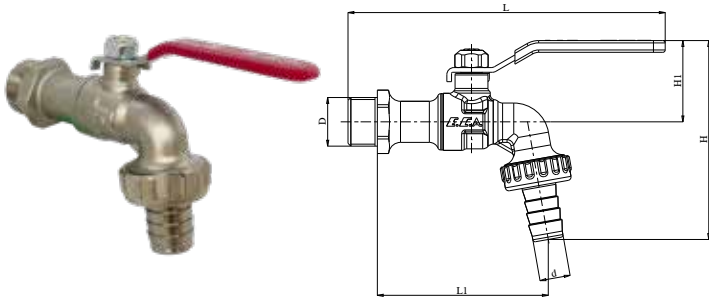

DRAIN BALL VALVE, ANGLE

Code	D	D1	D2	H	H1	L	L1	Inbox Qty
102109120	1/2"	3/4"	Ø24,6	82,5	44	75,5	37,5	40


- TSEK
- Nickel Plated
- Handwheel with 90° turn
- Fixed hose end
- Operating Pressure: 10 bar
- Max. Operating Temperature 80°C
- Rosette Included

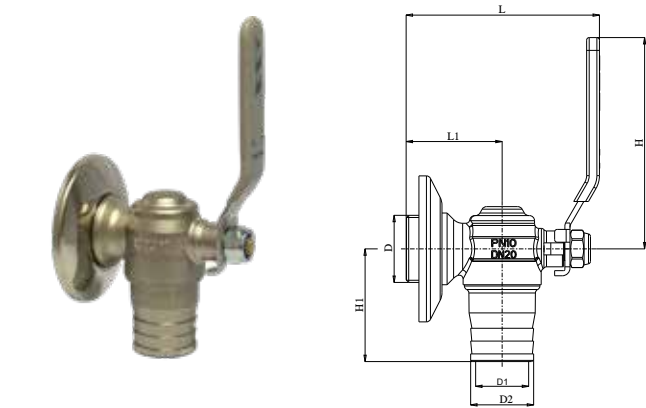

FIRE FIGHTING

DRAIN BALL VALVE, ANGLE

Code	L	H1	A	D1	D2	H	Inbox Qty
601014002	80	17	25°	2"	2"	OPENED: 177 CLOSED: 155	40

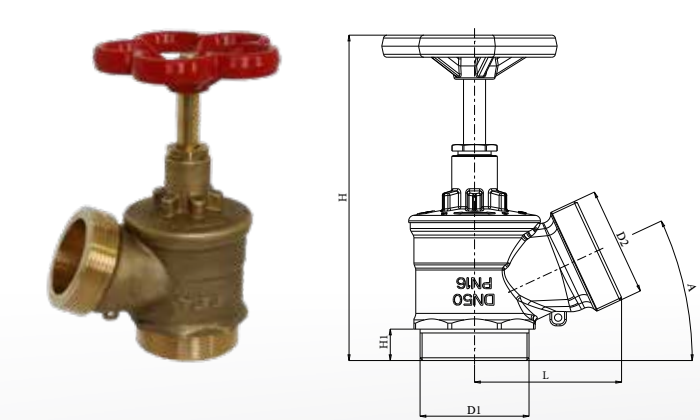

www.eca.com.tr

Export Sales

ELEKS DIŞ TİCARET A.Ş.

Esentepe Mah. Kasap Sok. No:15/1 34394
Şişli / İSTANBUL Tel : +90 212 708 48 76
Mobil : +90 530 177 07 54 Fax : +90 212 292 80 36
www.eleks.com.tr eleks@eleks.com.tr

Producer

VALF SANAYİİ A.Ş.

Organize Sanayi Bölgesi, Kurtuluş Cad. No:1
45030 / Manisa / TURKEY Phone: +90 (236) 233 25 60
Fax: +90 (236) 233 25 63
www.valf.com.tr info@valf.com.tr



Scan the QR code for the Digital Catalogue



ECA2025/1GK

Valf Sanayi A.Ş. and Eleks Dış Ticaret A.Ş. are the members of Elginkan Group